

Power Choke Coil HTEB16080F MSR type

■ Features

High performance (Isat) realized by metal dust core.

Low profile : 1.6 mm x 0.8 mm x 0.6 mm

Low loss realized with low DCR

100% lead (Pb) free meet RoHS standard

■ Application


DC/DC converter for CPU in Notebook PC

Cellular phones, LCD displays, HDDs, DVCs, DSCs, PDAs etc..

Thin type on-board power supply module for exchanger

VRM for server

■ Outline Dimensions

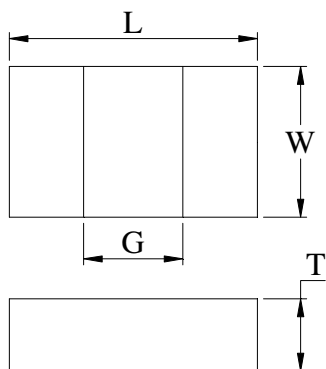


| Code | Dimensions |
|------|------------|
| L | 1.6 ± 0.2 |
| W | 0.8 ± 0.2 |
| T | 0.6 Max. |
| G | 0.65Typ. |

Unit : mm

■ Recommend Land Pattern Dimensions

The customer shall determine the land dimensions shown below after confirming and safety.

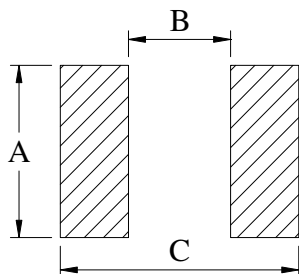


| | |
|---|------|
| A | 0.9 |
| B | 0.55 |
| C | 1.7 |

Unit : mm

■ Marking

The point on the top surface represents winding direction of choke.

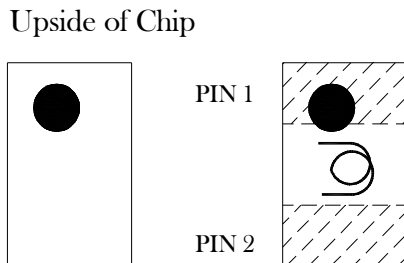

Coil clockwise around

■ Specifications

| Part Number | L0 Inductance (μH) @ (0A) | R_{dc} ($\text{m}\Omega$) | | Heat Rating Current DC Amps. I_{dc} (A) | | Saturation Current DC Amps. I_{sat} (A) | |
|-------------------|--|-------------------------------|---------|---|---------|---|---------|
| | | Typical | Maximum | Typical | Maximum | Typical | Maximum |
| HTEB16080F-1R0MSR | 1.0 | 283 | 318 | 1.0 | 0.9 | 1.50 | 1.35 |
| HTEB16080F-1R5MSR | 1.5 | 420 | 480 | 0.8 | 0.7 | 1.00 | 0.90 |

* : If you require another part number please contact with us.

** : Inductance Tolerance $\pm 20\%$

Note 1. : All test data is referenced to 25°C ambient.

Note 2. : Test Condition: 1MHz, 1.0Vrms

Note 3. : I_{dc} : DC current (A) that will cause an approximate ΔT of 40°C

Note 4. : I_{sat} : DC current (A) that will cause L0 to drop approximately 30%

Note 5. : Operating Temperature Range -55°C to $+125^{\circ}\text{C}$

Note 6. : The part temperature (ambient + temp rise) should not exceed 125°C under the worst case operating conditions. Circuit design , component placement, PCB trace size and thickness, airflow and other cooling provision all affect the part temperature. Part temperature should be verified in the end application.

Note 7. : The rated current as listed is either the saturation current or the heating current depending on which value is lower.

Current Characteristic

