



REED SWITCH DEVELOPMENTS CORP.

2524 Norwood Court
Racine, WI 53403
Ph: (262)883-9060

sales@reedswitchdevelopments.com

SPECIFICATION SHEET

2602-1900-400

Alternate Part Number:

AM2602-1900-10K01

Active / Equivalent Part Numbers:

2602-1900-400 - KIT - Contains

(1) 2602-1900-100 - Magnetic Reed Sensor

(1) 2602-4002-000 - Magnetic Actuator

AM2602-1900-10K01 - KIT - Contains


(1) AM2602-1900-10-01 - Magnetic Reed Sensor

(1) AM2602-4002-00-01 - Magnetic Actuator

Sensor (Reed) - Specifications 1900

Physical		Operating		Electrical	
Configuration	SPDT				
Form	C				
Contact Position	OFFSET				
Glass L	14.00 mm				
Glass D	2.30 mm				
Total L*	55.00 mm				
Wire D	0.53 mm				
Gap Location	OFFSET				
Mount Spec*	THRU				
Contact Material	RHODIUM				
Max Vibration Resistance	20 G				
Max Shock Resistance (11ms)	50 G				
Lead Tensile Strength	N/A KG				
Pull in (+/- 2AT)*	20-25 AT				
Drop out*	5 AT				
Operate Time	2.0 ms				
Bounce Time	0.60 ms				
Release Time	0.50 ms				
Resonant Frequency	N/A Hz				
Max Operating Frequency	250 Hz				
Operating Temperature Range	-40 - 105 °C				
Storage Temperature	N/A °C				
DC Contact Rating	20 W				
AC Contact Rating	20 VA				
DC Switching Voltage	150 VDC				
AC Switching Voltage	150 VAC				
DC Switching Current	1.00 A				
AC Switching Current	1.00 A				
DC Max Carry Current	2.00 A				
AC Max Carry Current	2.00 A				
Min Breakdown Voltage	200 VDC				
Max Initial Contact Resistance	150 mOhm				
Typical Initial Contact Resistance	N/A mOhm				
Max Contact Capacitance	0.80 pF				
Min Insulation Resistance	10 ⁹ Ohm				

* Pre-processed, bare reed element

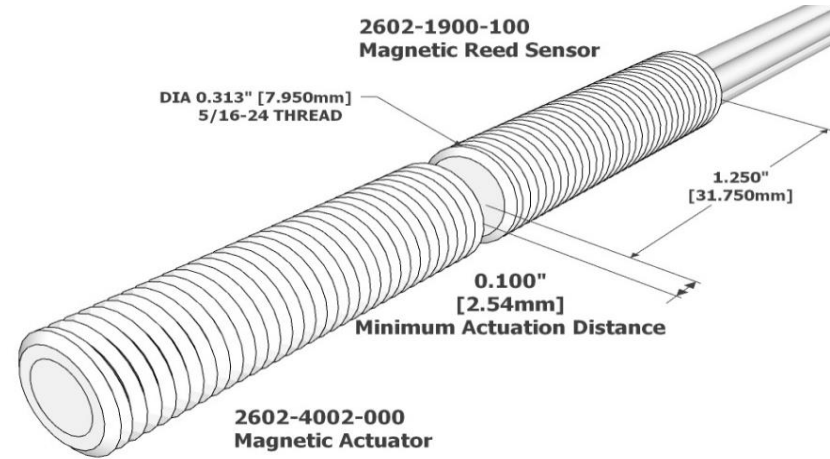

All measurements are in Inches [millimeters]

Sensor - Wire/Cable Characteristics (cont.)

Type	Wire
Conductor Count	3
Length	6.0"/152.4mm
Colors	RED, BLK, WHT
Insulation Material	PVC
Gauge	24 AWG
Stranded Copper	7 STR-TC
Maximum Temp	105°C

Conductor Configuration

Common (COM) - WHITE
Normally Open (NO) - RED
Normally Closed (NC) - BLACK

Housing Characteristics 2602

Cylindrical Threaded (5/16-24)	
Length	1.250"/31.75mm
Diameter	0.313"/7.95mm
Material	Stainless Steel

Standard Actuator: 2602-4002-000

Specifications	Description	UM
Magnetic Orientation	Through Length	
Max Operating Temp.	975/525	°F/°C
Curie Temp.	1580/860	°F/°C
BR max	12.8	kGauss
BH max	5.5	MGOe
Coercive Force Hc	640	kOe
Intrinsic Coercive Force Hci	640	kOe

Std. Sensor/Actuator - Min. Actuation Dist.

2602-4002-000	0.10"/2.5mm
---------------	-------------

Assembly Certifications

UL Recognized (File #: E102207)	Y
RoHS / REACH Compliant	Y
Conflict Free Material	Y

REV DATE: 10/06/2021

DISCLAIMER NOTICE: INFORMATION FURNISHED IS PROPRIETARY, AND IS BELIEVED TO BE ACCURATE AND RELIABLE, AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IT SHALL BE THE RESPONSIBILITY OF THE BUYER TO ENSURE THAT THE GOODS ARE SUFFICIENT AND SUITABLE FOR THE PURPOSE OR PURPOSES INTENDED (WHETHER BY THE BUYER OR BY ANY THIRD PARTY) AND THAT THEIR CAPACITY AND PERFORMANCE IS NOT ADVERSELY AFFECTED BY ANY ITEMS USED IN THEIR INSTALLATION (WHERE RELEVANT) AND/OR IN CONNECTION WITH THEM.

WBE Certified - State of Wisconsin - MFR CAGE CODE: 32604

www.reedswitchdevelopments.com