


S21 TRANS LOG MAG.


▶0.000 dB 0.100 dB/DIV

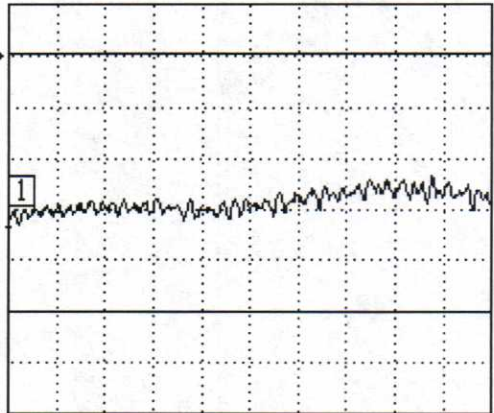

17.300000000 GHz 22.000000000

S11 REFL LOG MAG.


▶0.000 dB 5.000 dB/DIV

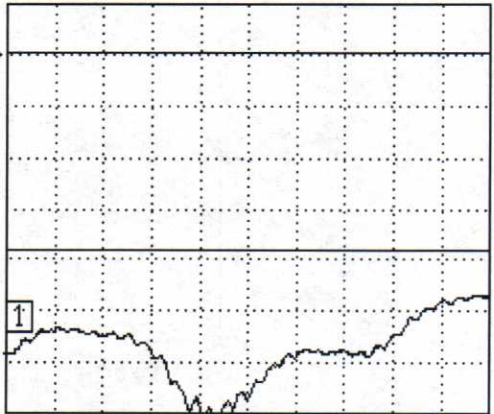

17.300000000 GHz 22.000000000

S22 REFL LOG MAG.


▶0.000 dB 5.000 dB/DIV

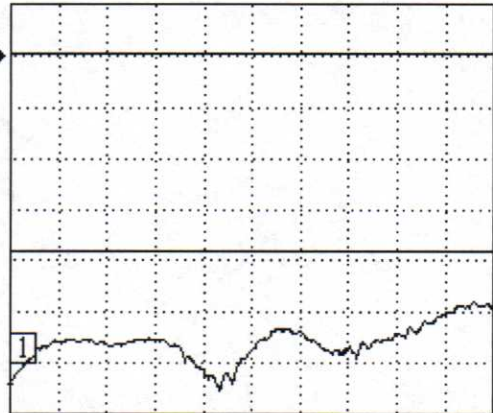

17.300000000 GHz 22.000000000

S12 TRANS LOG MAG.

▶0.000 dB 5.000 dB/DIV

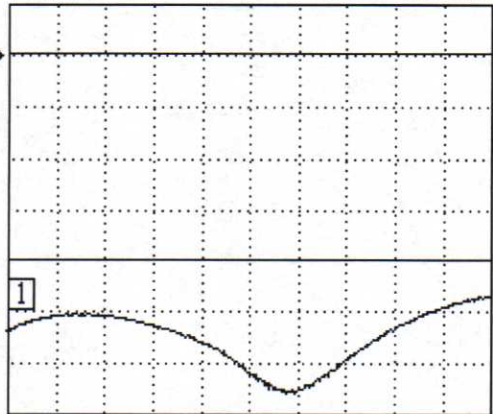

17.300000000 GHz 22.000000000

CH 1 - S21

0.0000 mm REF  
0.000 dB OFFSET  
0.00° OFFSET

MARKER 1

17.300000000 GHz  
-0.340 dB

MARKER TO MAX

▶MARKER TO MIN

MARKER READOUT  
FUNCTIONS

D3I1822

17.30 - 22.00 GHz

Isolation: 20 dB Min  
Insertion Loss: 0.50 dB Max  
VSWR: 1.25:1 Max