

т	۵	н п	m	0



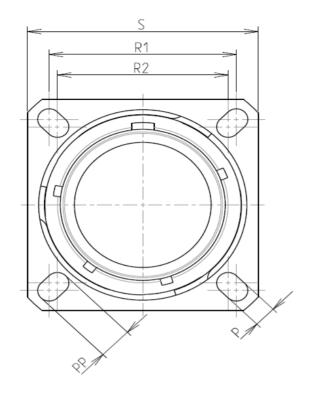



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range : 48 hours -Salt Spray -Mass : 11.73 g ± 10%

8D 0

G

11

F

98

Ρ

F

Е

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g


ORIENTATION : E

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-98

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

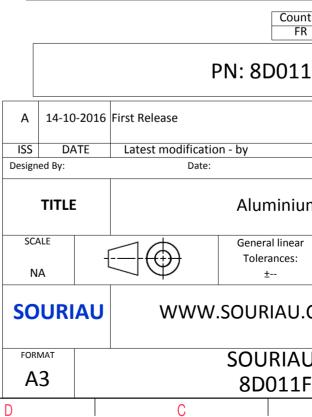

	Φ		A			
					4	
AS EXA	AMPLE				3	
s whic er of t	non-conformit th does not co he Parties or t on, technical no Jurisd	mply with by a third par				
FR	98PE	Not Listed			2	
		CUSTOME	R DRAWING	MOD N°		
um	m Receptacle 8D series					
ar :		NPRDS / PROJECT 859				
	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N° 8PE-C			SHEET 1/2		
	В		А		ı	

		۵	н П	m		0	
		Contact Layout				Ра	nel Cutou
4	-×	$ \begin{array}{c} & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & $			ĥ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Shell Arrangement Numt	A +.000 (0.00) +.130 (3.30) B +.130 (3.30) +.000 (0.00) C +.065 (1.65)113 (2.87) D065 (1.65)113 (2.87) E130 (3.30) +.000 (0.00) F +.000 (0.00) +.000 (0.00) ber of Size Service Contact Supersedes	1				; . <u>.</u>
ω	size no. cont 11 -98 6					Dim ØA ØAA R1	
						ØT	
						SOURIAU shall not be liab due to a use of the Pro the Specifications issued by (professional recor	oducts wh y either of
S							Country FR
					A 14-10-20	PN: 8	
					ISS DATE Designed By:	Date:	
					SCALE	General General Toler	minium al linear rances:
1					SOURIA		± RIAU.C
			1		FORMAT A3	8D	RIAU 011F9
	Н	G	F	E	D	C	

