

|        | т  |  | G        | ш  | "                     | Π                                | τ                  | D                            |                                       | C   |                              |                             |
|--------|--|--|----------|--|-----------------------|----------------------------------|--------------------|------------------------------|---------------------------------------|---|------------------------------|-----------------------------|
| 4      |  |  | V Thread | ØS   |                       |                                  |                    |                              |                                       |   |                              |                             |
| ى<br>س |  |  |          |  |                       |                                  |                    |                              |                                       | LAY   | OUT SHOV                     | WN AS EXA                   |
|        |  |  |          | Keying Showr   | as example            |                                  |                    |                              |                                       |   |                              |                             |
|        | CHARACTERISTICS<br>-Standard : Based on  | MIL DTL 28000 Sorias   |          |  | Connector<br>Dim      | dimension<br>Nominal             |                    |                              |                                       |   |                              |                             |
| 2      | -Shell Material<br>-Shell Plating<br>-Insulator<br>-Contacts<br>-Seals & Grommet                         | : Composite<br>: Olive drab Cadmin<br>: Thermoplastic<br>: Copper Alloy<br>: Silicon Elastomer | um       |  | ØS<br>Z'<br>VV THREAD | 29.4 Max<br>31.5 Max<br>M18x1-6g |                    |                              |                                       | SOURIAU shall n<br>due to a use o<br>the Specifications<br>(professio | of the Proc<br>issued by     | ducts which<br>either of th |
|        | -Contact Plating<br>-Durability<br>-Delivered with Souria<br>-Temperature Range<br>-Salt Spray<br>- Mass | : 500 Mating cycles  |          | n  |                       |                                  |                    | A 1                          | 17-10-2016<br>DATE                    | First Release<br>Latest modification                                  |                              | 0513J0                      |
| -      | BASIC SERIES:<br>SHELL TYPE : Plug wi  | 8D   | 5 - 13   | J 04 P N   |                       |                                  | -                  | Designed<br>T<br>SCALE<br>NA | ITLE                                  | Date:   | C<br>General<br>Tolera<br>±- | nces:                       |
|        | CONTACT TYPE : Sta<br>SHELL SIZE : 13<br>PLATING : J =   | andard Crimp Contact<br>Olive drab Cadmium   |          | ORIENTATION : N<br>CONTACT TYPE : PIN(500 Matings)<br>CONTACT LAYOUT : 13-04 |                       |                                  | SOL<br>FORMA<br>A3 |                              | WWW.SOURIAU.CO<br>SOURIAU<br>8D513J04 |   | RIAU E                       |                             |
|        | Н  |  | G        | F  |                       | E                                |                    | D                            |                                       | С   |                              |                             |

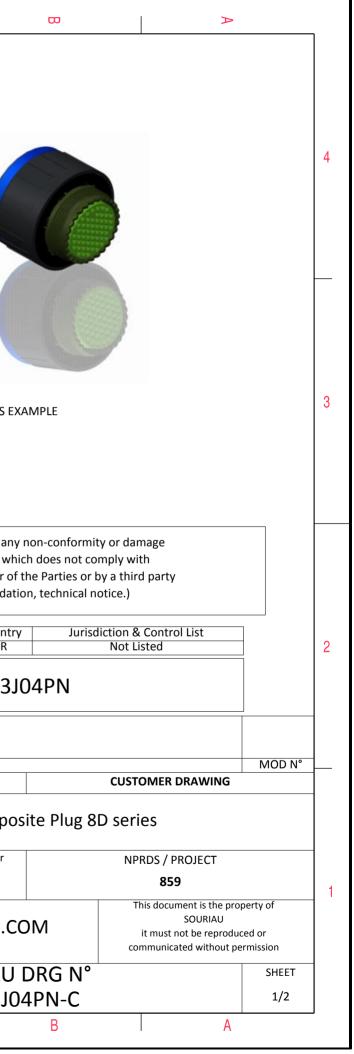

| -          | <b></b>   | ര   | וד | m | D                        | 0   |
|------------|---|---|----|---|--------------------------|---|
|            |   | Contact Layout  |    |   |                          |   |
| 4          | ×   | $ \begin{array}{c}                                     $  |    |   |                          |   |
|            | Conta<br>position<br>A<br>B<br>C<br>D<br>Shell Arrangement N<br>size no. c<br>13 -4 | +.000 (0.00) +.150 (3.81)<br>+.146 (3.71) +.035 (0.89)<br>+.000 (0.00)083 (2.11)<br>146 (3.71) +.035 (0.89) |    |   |                          |   |
| ω          |   |   |    |   |                          |   |
|            | 1   |   |    |   |                          |   |
|            |   |   |    |   |                          | SOURIAU shall not be liable for an<br>due to a use of the Products w<br>the Specifications issued by either o<br>(professional recommenda |
| N          |   |   |    |   |                          | Count<br>FR   |
|            |   |   |    |   |                          | PN: 8D513   |
|            |   |   |    |   |                          | 016 First Release   |
| _          |   |   |    |   | ISS DATE<br>Designed By: | Latest modification - by<br>Date:   |
|            |   |   |    |   | TITLE                    | Compo   |
| _ <b>_</b> |   |   |    |   | SCALE<br>NA              | General linear<br>Tolerances:   |
|            |   |   |    |   | SOURIA                   | U WWW.SOURIAU.C   |
|            |   |   |    |   | FORMAT<br>A3             | SOURIAU<br>8D513J   |
| L          | Н   | G   | F  | E | D                        | C   |

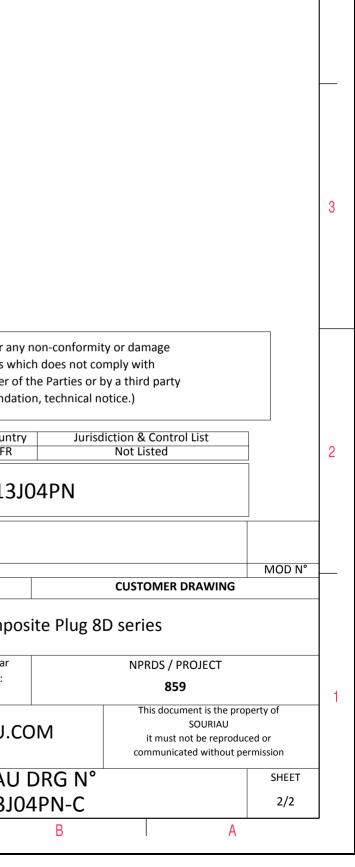

4