

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.

ISSUE NUMBER	
ORIGINAL	(1)

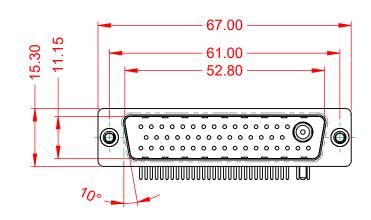




## NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED



10A (CURRENT) POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE:  $10m\Omega$  MAX. **INSULATOR RESISTANCE:** 5000MΩ min.


.X ±0.25 .XX ±0.13 .XXX ±0.05

DIELECTRIC WITHSTANDING VOLTAGE:

**OPERATING TEMPERATURE:** 

-55°C ~ 125°C

1000V AC rms



			SW REFERENCE NO.: 629 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/201	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
	TORONTO, ONTARIO CANADA	OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	DRAWING NUMBER: 629-47W1640-1NA		ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-47W	1640-1NA	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

