


5CH Programmable DC Power Supply

MPS-5 Series

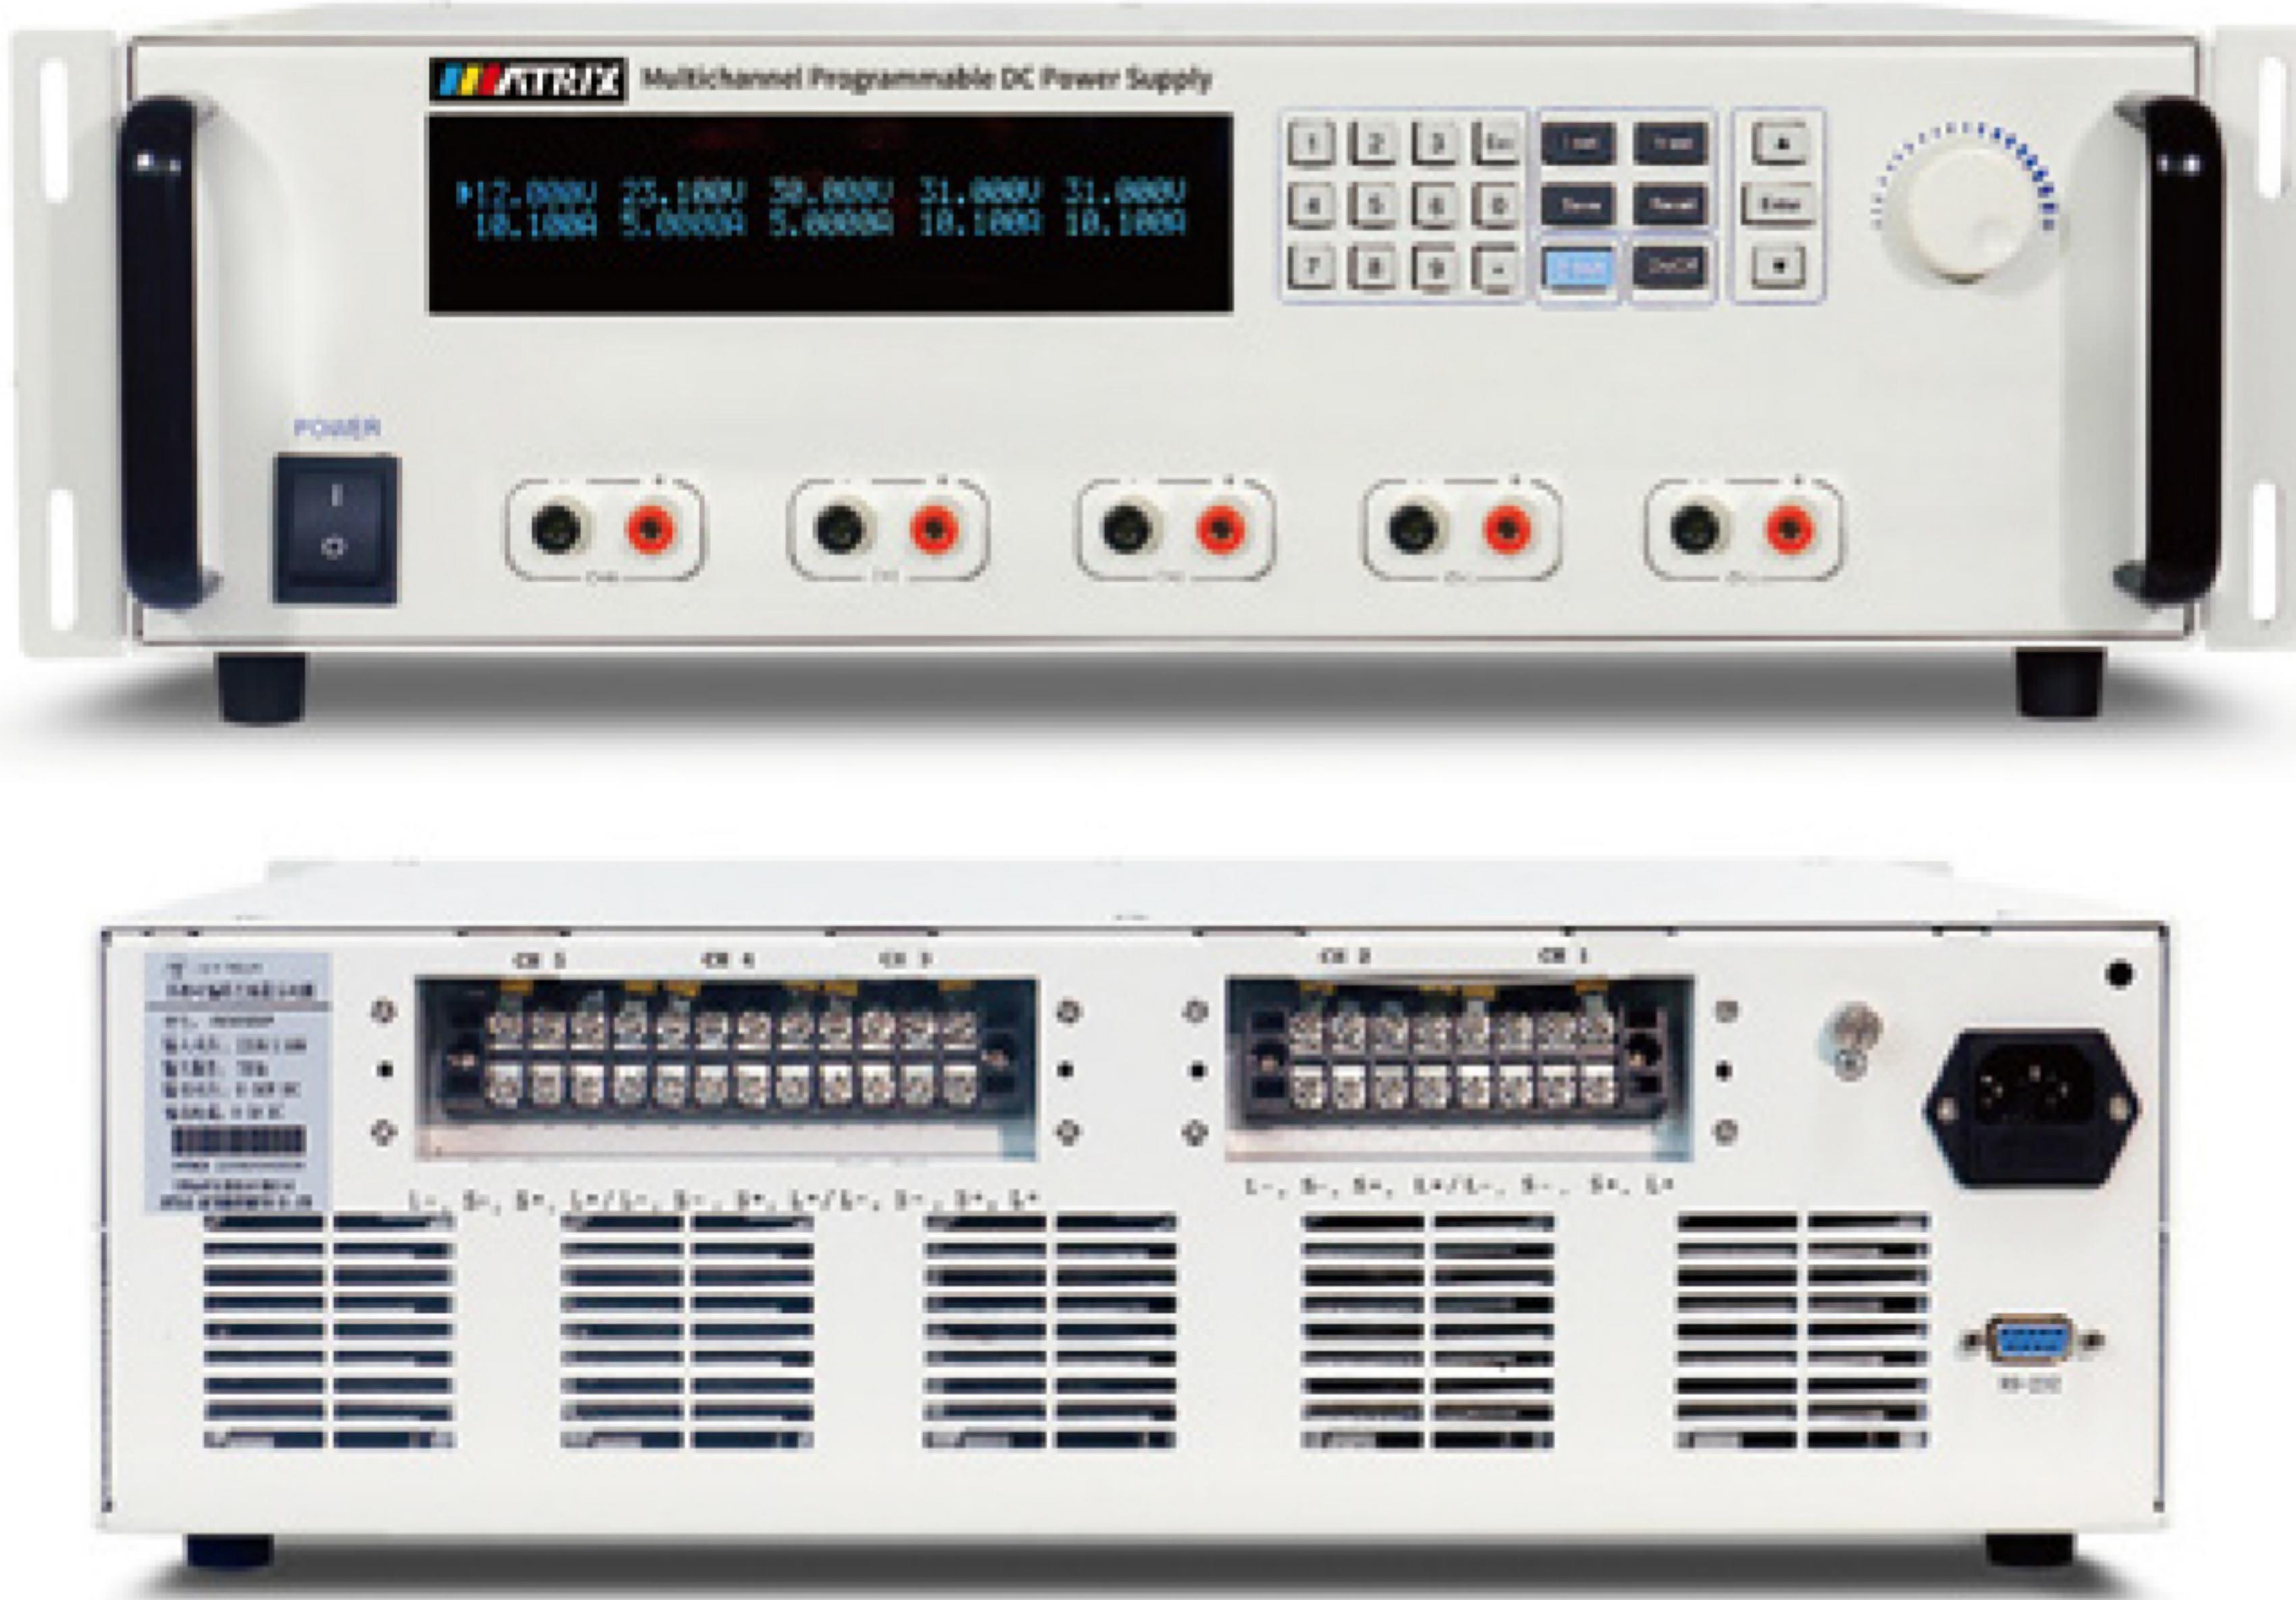

- 5 in 1, easy to operate, small volume;
- 30V/5A, 60V/3A output five channel are isolated
- Voltage compensation function improves accuracy
- 1mV/0.1mA high resolution
- Linear power supply, low ripple and noise
- Panel operation, it is convenient to be used independently

Standard RS-232 SENSE

| Model | MPS-3055 | MPS-6035 |
|-----------------------------|-----------------------|----------------------|
| Rated output voltage | 0~30V*5CH | 0~60V*5CH |
| Rated output current | 0~5A*5CH | 0~3A*5CH |
| Transformation method | Linear power supply | |
| Load regulation rate | Voltage | ≤0.02%+5mV |
| | Current | ≤0.02%+5mA |
| Line regulation | Voltage | ≤0.02%+5mV |
| | Current | ≤0.02%+5mA |
| Set value resolution | Voltage | 1mV |
| | Current | 0.1mA |
| Setting accuracy (25°C±5°C) | Voltage | ≤0.05%+5digits |
| | Current | ≤0.05%+2mA |
| Readback resolution | Voltage | 1mV |
| | Current | 0.1mA |
| Readback accuracy | Voltage | ≤0.05%+5digits |
| | Current | ≤0.05%+2mA |
| Ripple and noise | Voltage | ≤2mV(rms) |
| | Current | ≤5mA(rms) |
| Temperature Coefficient | Operating environment | 0 ~ 40 °C ≤ 80% RH |
| | Storage environment | -15 ~ 70 °C ≤ 80% RH |
| Interface | Standard | RS232 |
| size (W*H*D) | mm | 480*142*370 |
| weight | kg | 25 |