

Marshalling panel - CUC-PP-FR19:1U-I-EMPTY:24 BK - 1422979

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




19" patch bay, for 24 inserts

Your advantages

- assembly without special tools
- integrated cable tray
- Rugged design
- complete grounding concept integrated
- including mounting kit
- Marking window with interchangeable marking strips
- high packing density
- individually customized with RJ45 or FO inserts



Key Commercial Data

Packing unit	1 pc
GTIN	 4 055626 319933
GTIN	4055626319933

Technical data

Mechanical characteristics

Number of slots	24
Connection profile	RJ45
Connection method	Quick connection
Color	black
Mounting type	19" rack
Insulation resistance	according to IEC 61010-1
Degree of protection	IP20
Size of housing	1

Marshalling panel - CUC-PP-FR19:1U-I-EMPTY:24 BK - 1422979

Technical data

Mechanical characteristics

No. of cable outlets	24
----------------------	----

Ambient conditions

Ambient temperature (operation)	5 °C ... 55 °C
Ambient temperature (assembly)	-25 °C ... 55 °C
Ambient temperature (storage/transport)	-5 °C ... 55 °C
Degree of protection	IP20

Material data

Flammability rating according to UL 94	V0
Housing material	PC-GF
Material	Steel, galvanized
Depth	83.4 mm
Height	43.6 mm

Standards and Regulations


Flammability rating according to UL 94	V0
Shock	Acceleration time 30 m/s ² in all 6 directions

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Dimensional drawing

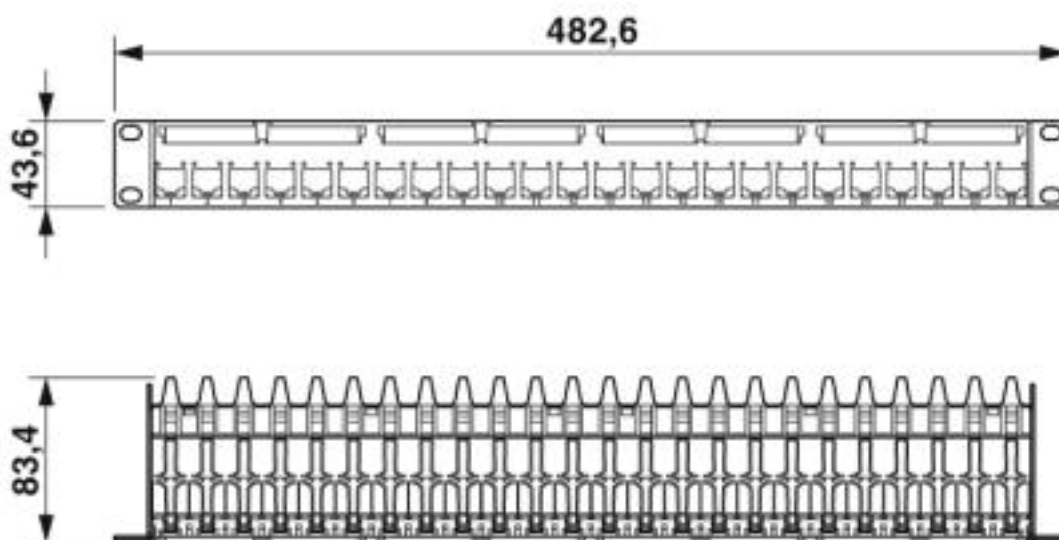

19" patch panel

Marshalling panel - CUC-PP-FR19:1U-I-EMPTY:24 BK - 1422979

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		B.01742
-----	---	---------

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>