
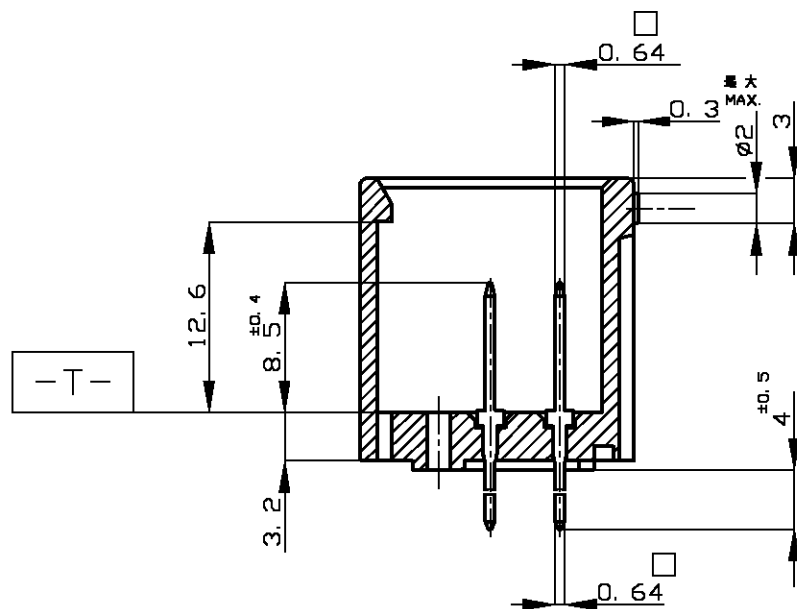
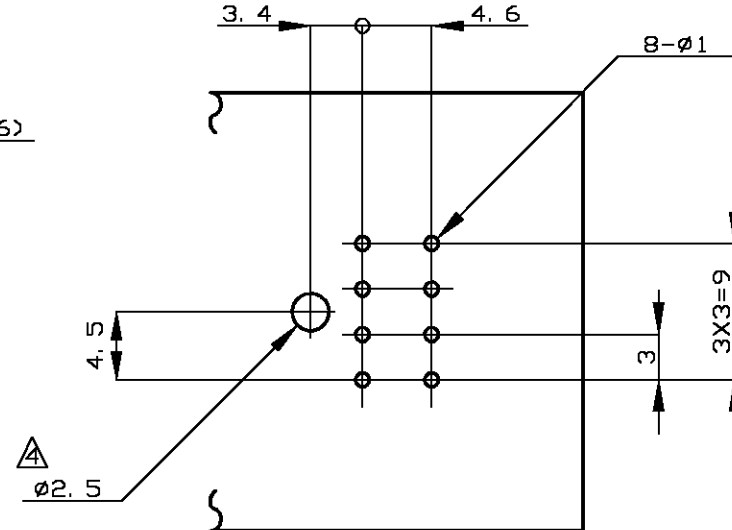
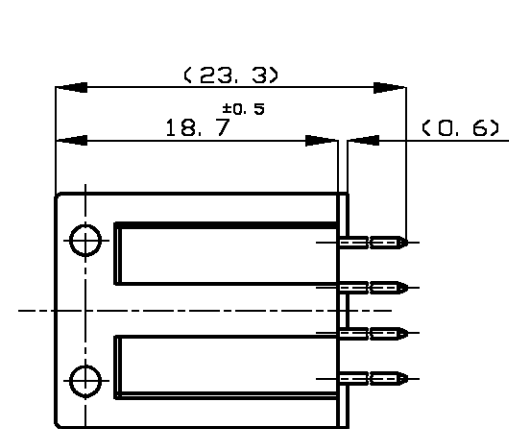


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION

© COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
J	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
		F1	REVISED	ECR-06-003257	10FEB06	TS	KB

プリント基板取付穴寸法 公差±0.1  
(MOUNTING DIMENSIONS FOR P. C. B. ; TOLERANCES ±0.1)

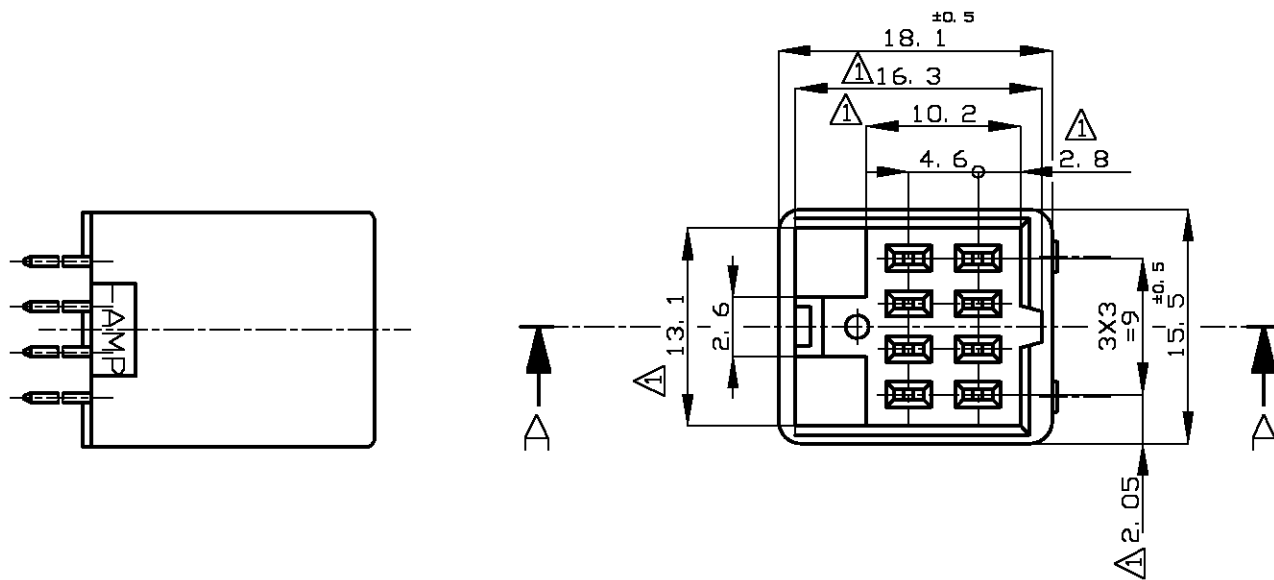

断面 A-A

- △ [-T-] 面より2mmの範囲で測定
- 2. 適合する相手ハウジングは型番 172246, 172856
- 3. 適用製品規格 NO. 108-5124
- △ 推奨取付ねじ ; JIS B1115, B1122 タッピンねじ  
なべ3種 呼び径2, 長さ5
- △ THESE DIMENSIONS TO BE MEASURED BETWEEN [-T-] AND 2.0
- 2. MATALE PLUG HOUSING ; 17224-6, 172856
- 3. PRODUCT SPECIFICATION ; 108-5124
- △ RECOMMENDED MOUNTING SCREW ; JIS B1115 OR B1122  
PAN HEAD TAPPING SCREW, CLASS 3, DIAMETER 2. LENGHT 5

		BLACK	3-172260-2
		BLACK	2-172260-2
SELECTIVE-TIN	PRE-TIN	BLACK	172260-2
SELECTIVE-TIN (MATTE)	SELECTIVE-TIN (BRIGHT)	BLACK	172260-1
SOLDERING SIDE 半田付け部	CONTACT SIDE 接触部側	COLOR 色	PART NUMBER 製品型番
CONTACT FINISH コンタクト仕上			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN T.SHINOHARA 10FEB06	 Tyco Electronics AMP K.K. Kawasaki, Japan
CHK K.BETSUI 10FEB06	
APVD K.BETSUI 10FEB06	
NAME 名称	
PRODUCT SPEC 製品規格	8POSITION VERTICAL TYPE CAP HOUSING ASSEMBLY DUALLINE INTERLOCK CONNECTOR
APPLICATION SPEC 取付適用規格	SIZE CAGE CODE DRAWING NO A3 00779 C-172260
WEIGHT	RESTRICTED TO
CUSTOMER DRAWING	
SCALE 2:1 SHEET 1 OF 1 REV F1	

一般公差 (GENERAL TOLERANCE)

10以下	±0.2
10を超え 30以下	±0.25
30を超え 100以下	±0.3
角 度	±3°

DIMENSIONS: 単位: 概 mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差

0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±

FINISH 仕上 SEE TABLE

MATERIAL 材料 CONTACT ; COPPER ALLOY HOUSING ; 66NYLON