



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)

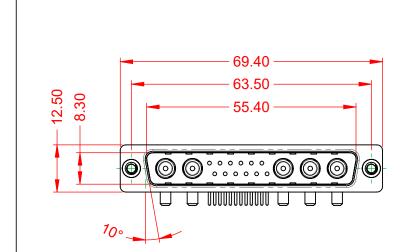




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED



POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. 5000MΩ min. **INSULATOR RESISTANCE:** DIELECTRIC


WITHSTANDING VOLTAGE:

OPERATING TEMPERATURE:

20A (CURRENT)

-55°C ~ 125°C

1000V AC rms



				SW REFERENCE NO.: 629 COMBO ASSEMBLY		
COMBINATION	COMBINATION D-SUB		DATE: JAN. 01/20	19		
			DATE:			
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2		
TORONTO, ONTARIO CANADA	OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	DRAWING NUMBER: 629-17W	5240-2T2	ISSUE		
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-17W	5240-2T2	1		



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

