


5.8kW 208/120V 3PH Monitored PDU - LX Interface, Gigabit, 45 Outlets, L21-20P Input, LCD, 1.8 m Cord, 0U 1.8 m Height, TAA

MODEL NUMBER: PDU3EVN6L2120

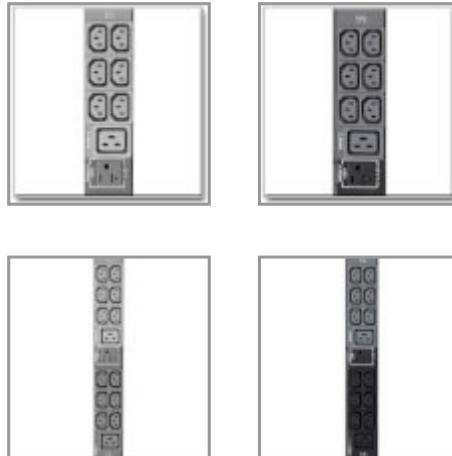

5.8kW 3-phase PDU with multifunction touchscreen LCD distributes and monitors AC power in an IT or industrial environment.

Features

3-Phase 0U PDU Distributes and Monitors Network-Grade Power Recommended for data centers, server rooms and network closets, this monitored power distribution unit provides real-time remote monitoring of voltage and load levels via built-in network connection. A 6-ft. (1.83 m) cord with NEMA L21-20P input plug connects the 208V 3-phase PDU to a compatible AC power source, generator or protected UPS. The firmware can be easily upgraded to ensure the Tripp Lite vertical PDU continues to perform at its best.

45 Outlets Dispense AC Power to Connected Equipment During normal operation, 36 C13 (208V), six C19 (208V) and three NEMA 5-15/20R (120V) outlets distribute AC power to rack equipment. The outlets are split into six individually monitored load banks—three banks containing two C19 and 12 C13 outlets and three of one 5-15/20R outlet each. Three LEDs monitor load conditions for each bank. Plug-lock insert sleeves for the C13 and C19 outlets are included to prevent connected cables from becoming accidentally dislodged.

Built-In GbE-Capable Network Management Card Allows Remote Access 24/7 The built-in WEBCARDLX with the latest version of PowerAlert Device Manager firmware (PADM20) provides enhanced remote management capabilities, including customizable dashboard graphs to fit user preferences. The PADM20 upgrade and Tripp Lite's PowerAlert Element Manager (PAEM) software form a powerful tool for expanding maintenance functions in large installations, including firmware update checks and backup and restoration of device configurations.

Color Touchscreen LCD Offers Important Data at a Glance An easy-to-navigate color touchscreen LCD reports network data, including IP address, input current level per phase, and output current per load bank with $\pm 1\%$ billing-grade accuracy. It also generates a unique QR code to allow read-only access to the 0U PDU via mobile device. If an EnviroSense2 module is connected to the 3-phase PDU, the LCD also displays status and environmental data, such as temperature and humidity.

Easy to Install Vertically in an EIA-Standard 19 in. Rack The 70-inch (178 cm) 0U PDU mounts vertically using the included toolless mounting buttons or the included rack-mounting brackets. Spare buttons are also included. Use the included PDUMVROTATEBRKT kit to install the 208V 3-phase PDU with outlets facing the rear for better airflow or equipment access.

Highlights

- 208V and 120V outlets distribute AC power to connected rack equipment
- 36 C13, 6 C19 and 3 NEMA 5-15/20R outlets split into 6 individually monitored load banks
- Pre-installed GbE-capable WEBCARDLX with latest version of PADM20 for enhanced remote management
- 1.8 m power cord with NEMA L21-20P input connects to compatible AC source
- Color touchscreen LCD provides vital load and environmental data and network info

Applications

- Power a major data center with hundreds of server racks running mission-critical applications
- Monitor power loads from various computers, switches, servers and other networking equipment
- Distribute power to a computer network in a large commercial or industrial facility

Package Includes

- PDU3EVN6L2120 5.8kW 3-Phase Monitored PDU
- Built-in LX Platform interface
- Configuration cable
- (42) Plug-lock insert sleeves
- Rack-mounting hardware
- Spare mounting buttons
- PDUMVROTATEBRKT mounting bracket accessory
- Owner's manual

TAA-Compliant for GSA Schedule PurchasesThe PDU3EVN6L2120 is compliant with the Federal Trade Agreements Act (TAA), which makes it eligible for GSA (General Services Administration) Schedule and other federal procurement contracts.

2-Year WarrantyThe PDU3EVN6L2120 is backed by a 2-year warranty, ensuring reliability and performance.

Specifications

| OVERVIEW | |
|-------------------------------------|--|
| UPC Code | 037332206787 |
| PDU Type | Monitored |
| INPUT | |
| Input Phase | 3-Phase |
| PDU Input Voltage | 208 |
| Recommended Electrical Service | Three-phase 20A 208V service |
| Maximum Input Amps | 16 |
| Maximum Input Amps Details | Agency de-rated to 16A continuous |
| PDU Plug Type | NEMA L21-20P |
| Input Cord Length (ft.) | 6 |
| Input Cord Length (m) | 1.83 |
| OUTPUT | |
| Output Capacity Details | 5.7kW (208/120V) total capacity; 9.2A (208V) max per output phase (L1-L2, L2-L3, L3-L1) / 16A (120V) max per output phase (L1, L2, L3) |
| Frequency Compatibility | 50 / 60 Hz |
| Output Receptacle Details | 5-15/20R outlets provide 120V output; C13 and C19 outlets provide 208V output |
| Output Receptacles | (3) 5-15/20R; (36) C13; (6) C19 |
| Output Nominal Voltage | 208/120V |
| USER INTERFACE, ALERTS & CONTROLS | |
| Reported Load Segments | Supports monitoring of input current per phase (L1, L2, L3) and output current for each output load bank (B1-B6); Outlets are color-coded and labeled for phase and load bank identification; L1-L2 feeds black C13/C19 outlets (B1); L2-L3 feeds dark-gray C13/C19 outlets (B2); L3-L1 feeds light-gray C13/C19 outlets (B3); L1-N feeds black 5-20R outlet (B4); L2-N feeds dark-gray 5-20R outlet (B5); L3-N feeds light-gray 5-20R outlet (B6) |
| Front Panel LCD Display | Touchscreen LCD reports NETWORK DATA (IP address, Subnet Mask, Gateway, MAC Address, Device Name, Model, Serial Number), INPUT PHASE DATA (Amperage, Wattage, Voltage per phase, plus Unbalance percentage), LOAD BANK DATA (Amperage, Wattage, Voltage per load bank, plus total PDU output in watts), CONFIGURATION DATA (Listing of current configuration settings), ENVIRONMENTAL DATA (Reports data and status of E2 sensor modules; Sensor options are available for temperature and humidity, plus input and output dry contacts), MOBILE ACCESS (Generates a unique QR code to view reported PDU details on a mobile device) |
| Current Measurement Accuracy (Amps) | +/-1% |

| | |
|--------------------------------------|--|
| Voltage Measurement Accuracy (Volts) | +/-1% |
| Power Measurement Accuracy (Watts) | +/-1% |
| SURGE / NOISE SUPPRESSION | |
| Automatic Shut-Off | No |
| PHYSICAL | |
| Material of Construction | Metal |
| Form Factors Supported | Vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks |
| PDU Form Factor | Vertical (0U) |
| Shipping Dimensions (hwd / in.) | 7.09 x 9.65 x 75.87 |
| Shipping Weight (kg) | 8.05 |
| Unit Dimensions (hwd / in.) | 70.000 x 2.170 x 2.520 |
| Unit Dimensions (hwd / cm) | 177.8 x 5.5 x 6.45 |
| Unit Weight (lbs.) | 13.50 |
| Unit Weight (kg) | 6.12 |
| ENVIRONMENTAL | |
| Operating Temperature Range | 32° to 122°F (0° to 50°C) |
| Storage Temperature Range | -22° to 140°F (-30° to 60°C) |
| Relative Humidity | 5% to 95% non-condensing |
| Operating Elevation (ft.) | 0-10,000 |
| Operating Elevation (m) | 0-3000 |
| COMMUNICATIONS | |
| PowerAlert Software | LX Platform Interface: PowerAlert Device Manager |
| Communications Cable | USB B-to-USB A Configuration/Console Access cable |
| Network Monitoring Port | RJ45 Network port, RJ45 Config/Console Access port; 2x USB A ports supports a variety of EnviroSense2 environmental and control modules. See Accessories>Management Hardware section for more information about these modules. USB B port (Configuration & Console Access) |
| SNMP Compatibility | Pre-installed LX platform network interface |
| Network Compatibility | 10 Mbps; 100 Mbps (Fast Ethernet); 1 Gbps (Gigabit) |
| FEATURES & SPECIFICATIONS | |
| High Availability PDU Features | Remote Network Notifications |
| STANDARDS & COMPLIANCE | |

TRIPP-LITE

by **EAT•N**

1000 Eaton Boulevard
Cleveland, OH 44122
United States

| | |
|-------------------------------------|--|
| Product Certifications | CAN/CSA-C22.2 No. 60950-1 (Canada); NOM (Mexico); UL 60950-1 |
| Product Compliance | RoHS; FCC Part 15 Class A (USA); Trade Agreements Act (TAA) |
| WARRANTY & SUPPORT | |
| Product Warranty Period (Worldwide) | 2-year limited warranty |

TRIPP-LITE

by **EAT•N**

© 2023 Eaton. All Rights Reserved.
Eaton is a registered trademark. All other trademarks
are the property of their respective owners.