

70 POS, PLUG, SOCKET,ARC SERIES,KEYED, RD SEALBLACK

ARC16-70SXR-P013

2

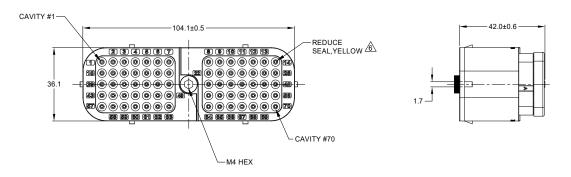

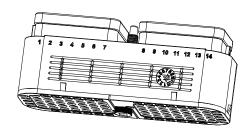

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL:
 HOUSING: THERMOPLASTIC, BLACK SEAL:
 SILICONE RUBBER
 CLIP: STAINLESS STEEL
 BOLT: STAINLESS STEEL
- 2. MODIFICATIONS: REDUCE DIA. WIRE SEAL; INTERFACE SEALS ARE BONDED TO PLUG HOUSING
- 3. SPECIFICATIONS:
 - 3.1 CURRENT RATING: 13 AMPS
 - 3.2 OPERATING TEMPERATURE: -55°C TO +125°C
 - 3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC
 - 3.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C 3.5 MOISTURE RESISTANCE:
 - IP68 (IM OF WATER FOR A PERIOD OF 24 HOURS, MATED CONDITION)
 IP69K(MATED CONDITION)
 - 3.6 MATING CYCLE DURABILITY: 100 CYCLES
 - 3.7 RoHS COMPLIANT
- 4. MATING PART: ARC12-70PX* RECEPTACLE (X = A,B,C,D KEYS ; * = ALL MODIFICATIONS)

5. SEE SHEET 2 FOR OTHER KEY ARRANGEMENTS


6CONTACT SIZE AND REAR SEAL WIRE RANGE:


CONTACT	MIN. INSUL	TYPICAL
SIZE	O.D.	WIRE RANGE
16	1.35 mm (.053 in)	14 - 20 AWG (2.0 - 0.5 mm ²)


7. PLUG IS SUPPLIED WITH DUST CAP


8 MATING TORQUE REQUIREMENT: 25 - 28 IN-LB [2.82 - 3.16 Nm]


9. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY

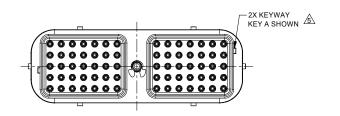


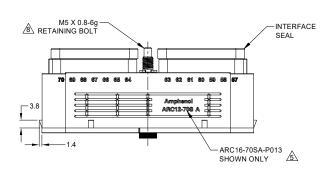


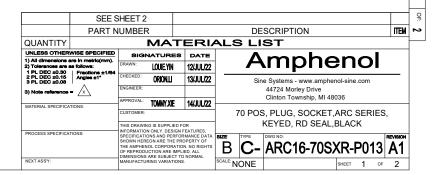






















	ARC16-24SX-P013	VARIANTS
PART NUMBER		REF
	ARC16-70SAR-P013	DRC16-70SAE-P013

ARC16-24SX-P013 VARIANTS	
PART NUMBER	REF
ARC16-70SBR-P013	DRC16-70-SBE-P013

ARC16-24SX-P013	VARIANTS
PART NUMBER	REF
ARC16-70SCR-P013	DRC16-70SCE-P013

ARC16-24SX-P013	VARIANTS
PART NUMBER	REF
ARC16-70SDR-P013	DRC16-70SDE-P013

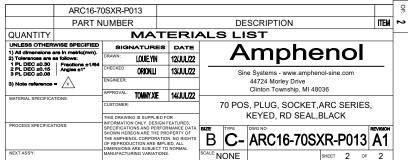

70 POS, PLUG, SOCKET,ARC SERIES,KEYED, RD SEAL,BLACK

DWG NO: ARC16-70SXR-P013 REV: A1 SH.