

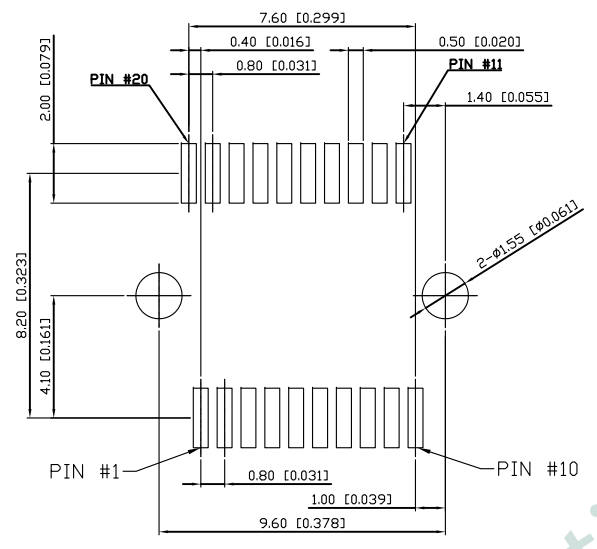
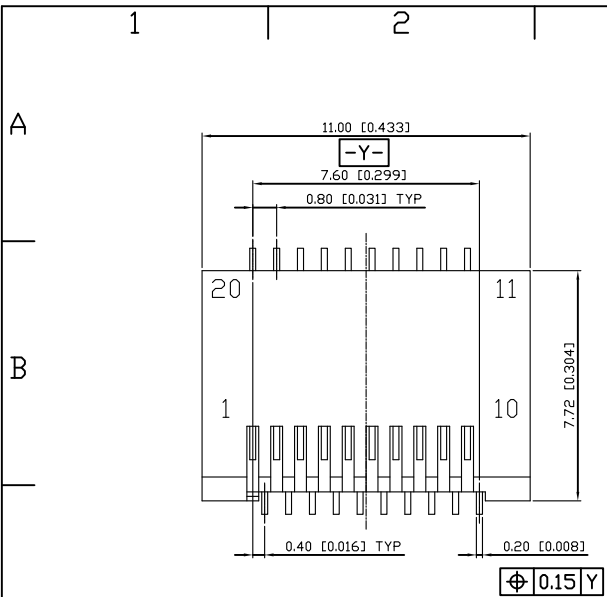
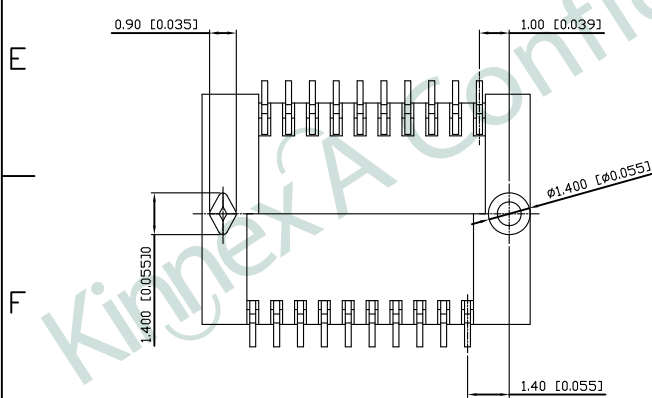


REV.	DATE	DESCRIPTION
01	Jul.01,16	1st RELEASE

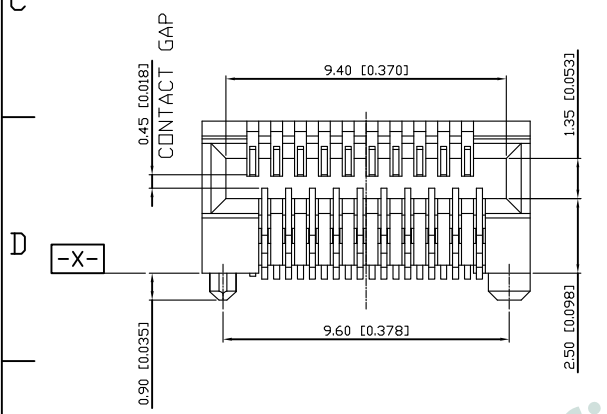

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05

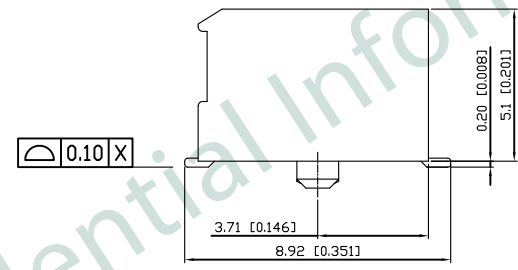

SPECIFICATIONS:

MATERIAL:
INSULATOR: GLASS-REINFORCED THERMOPLASTIC, UL94V-0, COLOR: BLACK
CONTACTS: PHOSPHOR BRONZE


PLATING:
CONTACT AREA: 15µ" GOLD PLATING
SOLDER TAILS: 3µ" GOLD FLASH OVER 50µ" NICKEL PLATE.

ELECTRICAL:
VOLTAGE RATING: 120 VAC MAX.
CURRENT RATING: 0.5 AMP.
CONTACT RESISTANCE: 35 MILLIOHMS MAX.
INSULATION RESISTANCE: 500 MOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 300 VAC/MINIMUM.



ENVIRONMENTAL:
OPERATING TEMPERATURE: -55°~+85°

UNSPECIFIED TOLERANCE:
.XXX ±0.10[0.004]
.XX ±0.20[0.008]
.X ±0.30[0.012]

KSFP-N-SSM0-2007


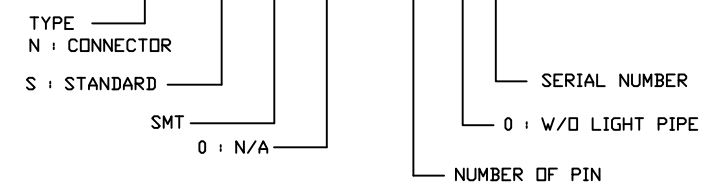


PART NO		KSFP-N-SSM0-2007		
TITLE	SFP CONNECTOR 0.80mm CERTER, 20 PIN SMT TYPE			
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	DANIEL	RYAN	Jul.01,16	1 of 2

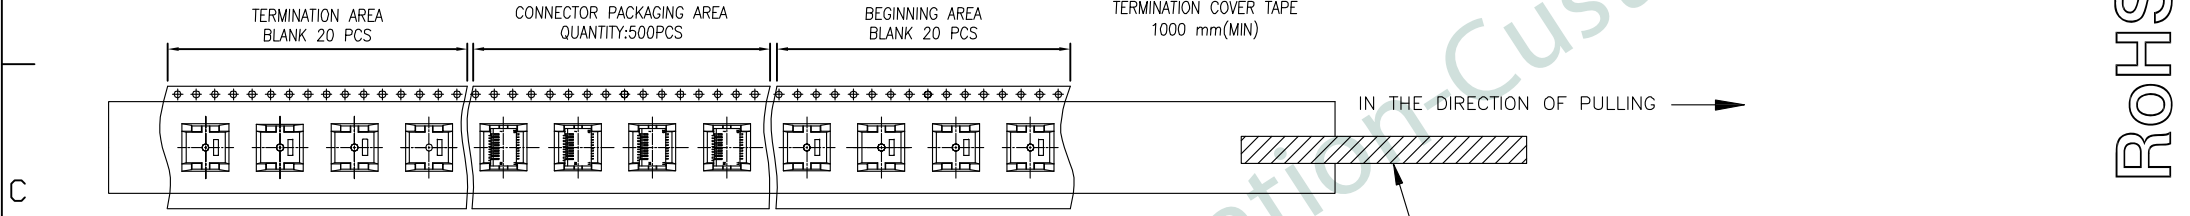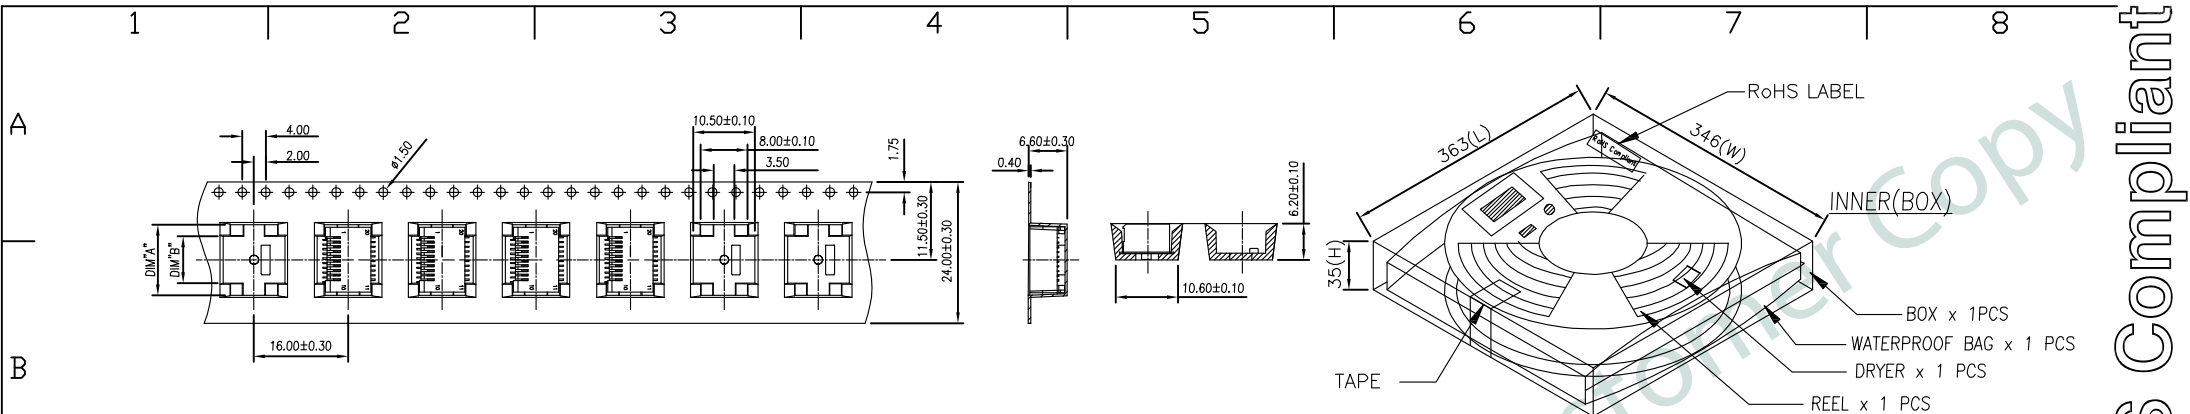

DIMENSION	
DIM "A"	12.00
DIM "B"	8.00

COMPOSITION OF PACKAGING
WIDTH : 24 mm Carrier

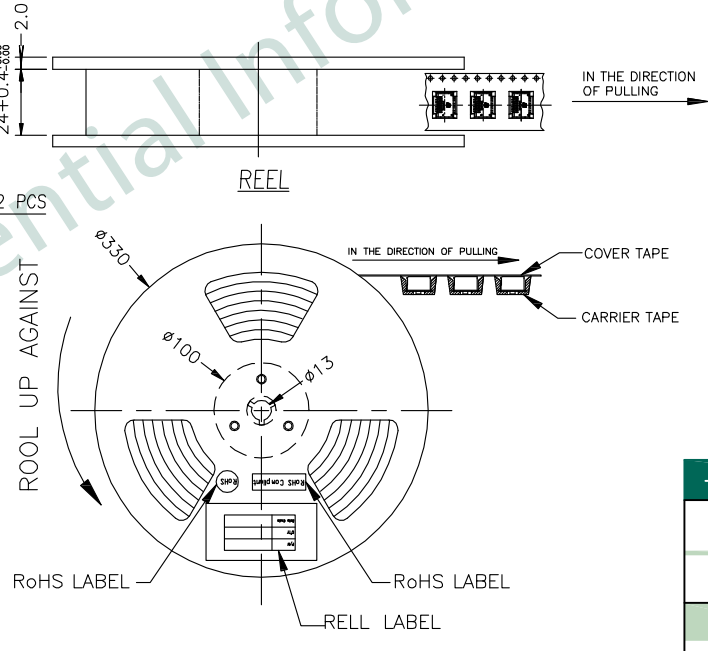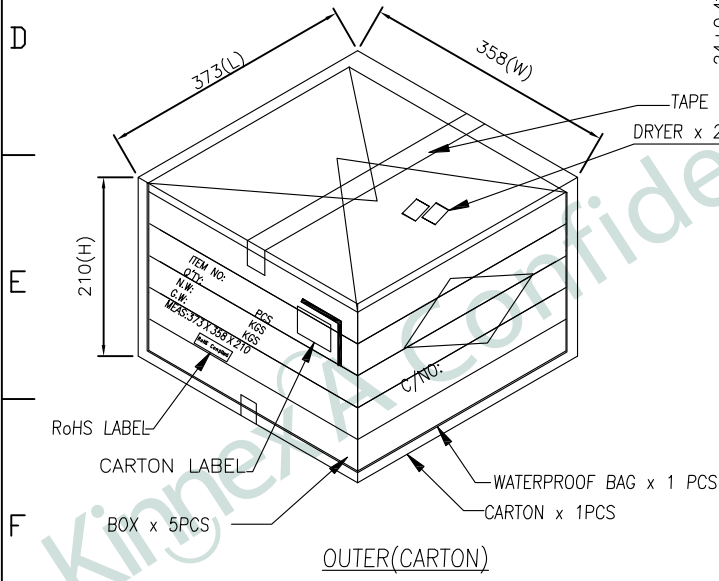

- NOTE:
1. REEL MATERIAL: PS
 2. CARRIER MATERIAL: PS
 3. COVERTAPE MATERIAL: PS
 4. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE±0.2mm.
 5. A MEASURED ON A PLANE 0.3mm ABOVE THE BOTTOM OF THE POCKET.
 6. MATERIAL: TRANSPARENT CONDUCTIVE POLYSTYRENE.
 7. THICKNESS: 0.4±0.05mm.
 8. PACKING LENGTH PER REEL: 24.60 METERS.
 9. COMPONENT LOADER 13" REEL" 500 PCS

PART NO		KSFP-N-SSM0-2007		
TITLE	SFP CONNECTOR 0.80mm CERTER, 20 PIN SMT TYPE			
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	DANIEL	RYAN	Jul.01,16	2 of 2