
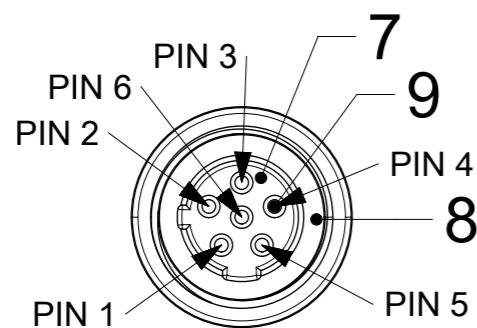




CABLE SPECIFICATION:

CONDUCTOR:
SECTION: 0.34mm²/22AWG
INSULATION
DIAMETER: 1.40±0,10mm
OUTER JACKET:
MATERIAL: PVC
COLOR: YELLOW
DIAMETER: 7.36 ±0.25mm
OPERATING TEMPERATURE:
STATIC: -30°C TO +105°C
DYNAMIC: -5°C TO +105°C
OPERATING VOLTAGE: 300V

WIRING DIAGRAM

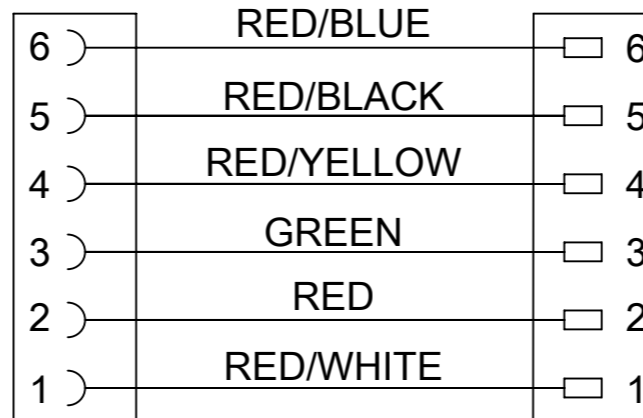

VIEW FROM THE FRONT SIDE (SCALE 2:1)

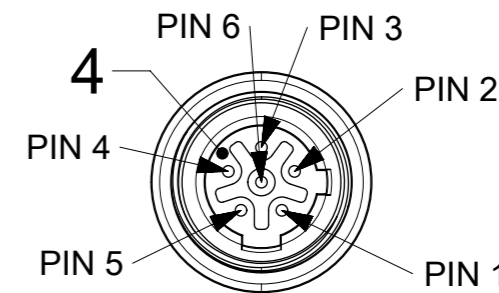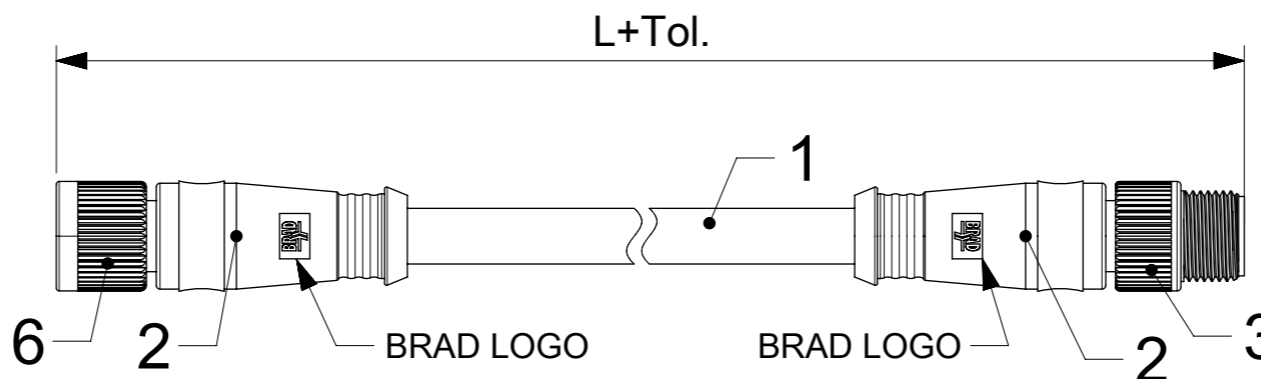

VIEW FROM THE FRONT SIDE (SCALE 2:1)

BILL OF MATERIAL

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
9	6	CONTACT FEMALE	BRASS	GOLD OVER Ni-PLATED
8	1	GASKET RED	FPM	-
7	1	INSERT M12 6P AC FEMALE 2KW	PUR	-
6	1	COUPLING NUT FEMALE M12	ZINC ALLOY	Ni-PLATED
5	6	CONTACT MALE	BRASS	Ni-PLATED
4	1	INSERT M12 6P AC MALE 2KW	NYLON	-
3	1	COUPLING NUT MALE M12	ZINC ALLOY	Ni-PLATED
2	-	MOULDING MATERIAL YELLOW	TPU	-
1	-	CABLE 6x0.34 YELLOW	PVC	-

TABLE 1

MOLEX PN	ENGINEERING No	L+Tol. [mm]
1200140002	996030D02M070	7000 +165
1200140005	996030D02M130	13000 +317
1200140006	996030D02M040	4000 +165
1200140008	996030D02M100	10000 +317
1200738030	996030D02M050	5000 +165

RELEASE STATUS	P1	RELEASE DATE	10.03.2017	07:27:37
----------------	----	--------------	------------	----------

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

EC NO: 114346 DRWN: AKONDRACIUK CHK'D: REVISION: 0 DATE: 2015/12/14	2017/03/09	2017/03/10	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS	SCALE	
			ANGULAR TOL ± °	MM	1:1		
			4 PLACES ±	DRWN BY	DATE		
			3 PLACES ±	AKONDRACIUK	2017/03/09		
2 PLACES ±	CHK'D BY	DATE	PRODUCT CUSTOMER DRAWING SERIES: 120014 MATERIAL NUMBER: SEE TABLE 1 CUSTOMER: GENERAL MARKET DOCUMENT NUMBER: 1200140002 DOC TYPE: PSD DOC PART: 000 SHEET NUMBER: 1 OF 1				
1 PLACE ±	APPR BY	DATE					
0 PLACES ±	MIWASIECZKO	2017/03/10					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE		THIRD ANGLE PROJECTION			
A	REV		A3				