

Housing - HC-EVO-B16-HHFD-2B-PL-BK - 1411496

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sleeve housing B16, for double locking latch, material: PA, cable outlets: 2, straight/lateral, height: 78 mm, cable gland: none, support sleeve: no, protective cover: no, Standard

Your advantages

- Flexible cable outlet direction, lateral or straight
- Lower costs than metal version
- Labeling option using 9 x 20 mm marking label
- Low weight
- Lower risk of condensation
- Both contact insert PE sheets are connected by means of a metal frame integrated in the sleeve housing
- Metal inlays ensure leading PE contact with angled plugs
- Completely corrosion-resistant
- Halogen-free plastic



Key Commercial Data

Packing unit	1 pc
GTIN	
GTIN	4046356932967

Technical data

Dimensions

Height	78 mm
--------	-------

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C (static)
---------------------------------	----------------------------

General

Note	for contact inserts HC-B16, BB32, D40, DD72, HS6, M, K, HV06
Type	B16
Flammability rating according to UL 94	V0

Housing - HC-EVO-B16-HHFD-2B-PL-BK - 1411496

Technical data

General

Locking type	for double locking latch
Pg screw connection	none
Cable outlet	straight
	lateral
Housing material	PA
Ambient temperature (operation)	-40 °C ... 125 °C (static)

Standards and Regulations


Flammability rating according to UL 94	V0
--	----

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

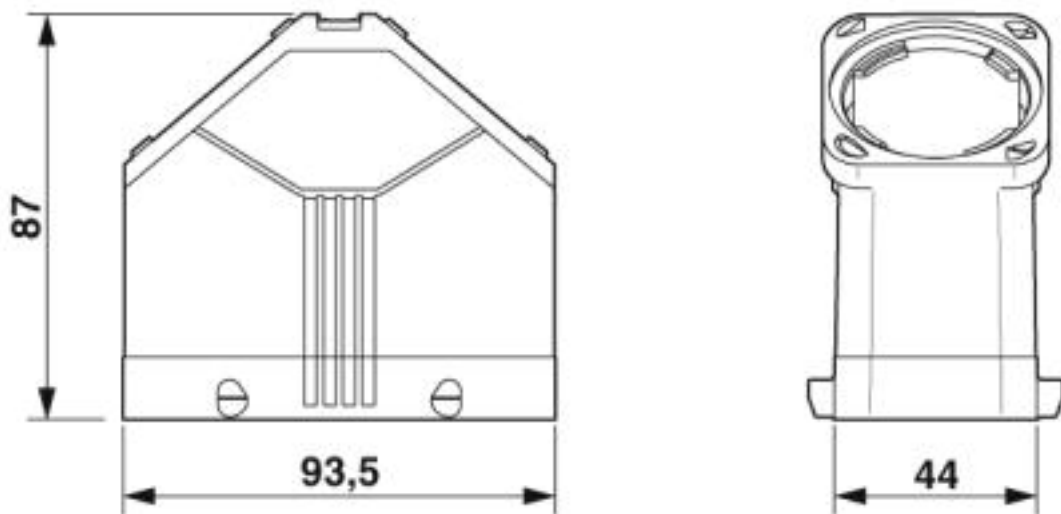

Dimensional drawing

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / EAC / DNV GL / cULus Recognized

Housing - HC-EVO-B16-HHFD-2B-PL-BK - 1411496

Approvals

Ex Approvals

Approval details

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E255026
cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E255026
EAC			RU C- DE.AI30.B.01102
DNV GL		https://approvalfinder.dnvgl.com/	TAE000037S
cULus Recognized			

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>