



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER


(1)







NOTES:



MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, Sn or Ni PLATED CONTACT: COPPER ALLOY SEE ORDERING GUIDE FOR PLATING


OPERATING TEMPERATURE: -55°C ~ 125°C

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: 10mΩ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

COMBINATION D-SUB		SW REFERENCE NO.: 628 COMBO ASSEMBLY			
		DRAWN: C.B	DATE: JAN. 01/20	19	
		CHECKED:	DATE:		
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4	
YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 628-2WK2624-4T1		ISSUE	
		PART NUMBER: 628-2WK	2624-4T1	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

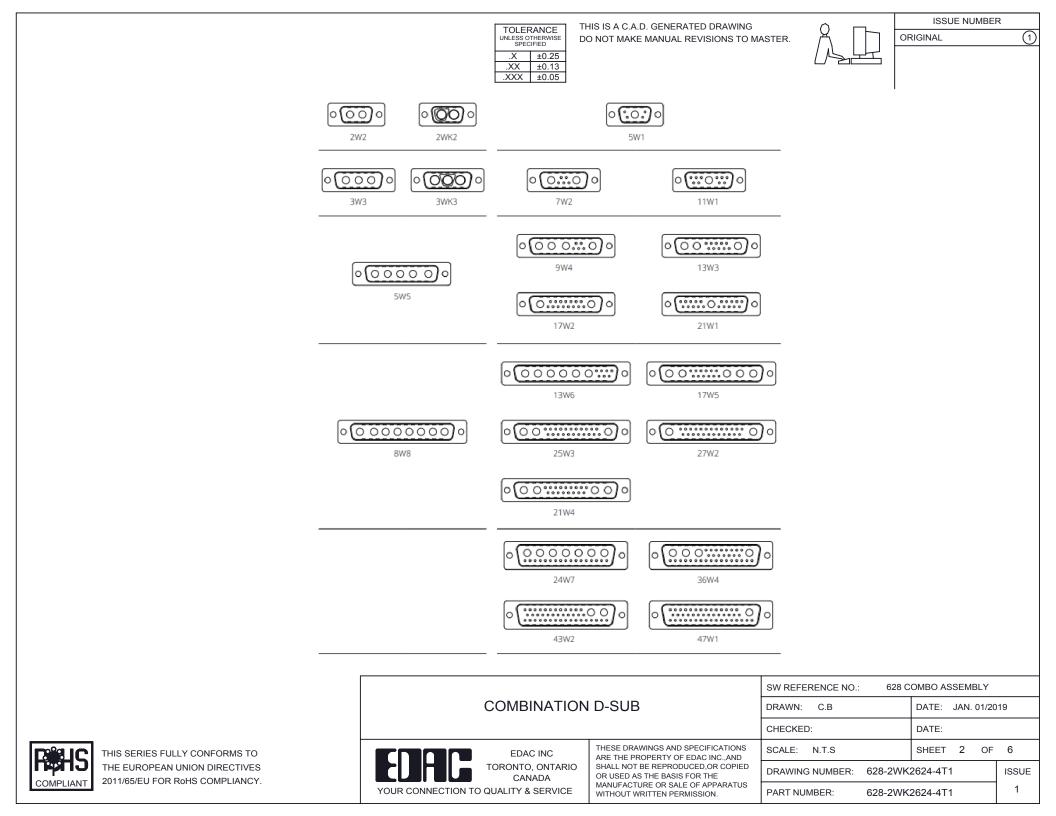

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25 .XX ±0.13 .XXX ±0.05



 $\overline{(1)}$ 

2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female






21W4 Male/Female



27W2 Male/Female




21W1 Male/Female



COMBINATION D-SUB		SW REFERENCE NO.: 628 COMBO ASSEMBLY			
		DRAWN: C.B	DATE: JAN. 01/20	19	
		CHECKED:	DATE:		
EDAC INC TORONTO, ONTARIO CANADA	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: N.T.S	SHEET 3 OF	4	
		DRAWING NUMBER: 628-2W	(2624-4T1	ISSUE	
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 628-2W	(2624-4T1	1	

5W5 Male

5W5 Female



47.00


23.53


8W8 Male

8W8 Female


31.76

22.83





11W1 Male/Female



17W2 Male/Female

CURRENT RATING / ØA 10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2



2011/65/EU FOR RoHS COMPLIANCY. COMPLIANT



 TOLERANCE
 THIS IS A C.A.D. GENERATED DRAWING

 UNLESS OTHERWISE
 DO NOT MAKE MANUAL REVISIONS TO MASTER.

 .X
 ±0.25





9W4 Male



25W3 Male



47.00 23.53 23.53 47.00 9.70 14.51 9.32 14.51 9.32 14.51 9.70 14.51 9.70 14.51 9.70 14.51 9.70 9.



36W4 Female




13W3 Male






51.00 30.50 13.72 16.62 5.74 15.24 1





13W6 Male



43W2 Male






.XX ±0.13 .XXX ±0.05

9W4 Female

13W3 Female




43W2 Female

47W1 Female




17W5 Male


COMPLIANT




47W1 Male









			SW REFERENCE NO.: 628 COMBO ASSEMBLY		
	COMBINATION	DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:	
THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.	TORONTO, ONTARIO CANADA	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: N.T.S	SHEET 4 OF	4
			DRAWING NUMBER: 628-2WK2624-4T1		ISSUE
			PART NUMBER: 628-2WK	2624-4T1	1