





Data sheet | Item number: 756-5311/060-100

Sensor/Actuator cable; M12A plug; straight; 5-pole; Length: 10 m

www.wago.com/756-5311/060-100

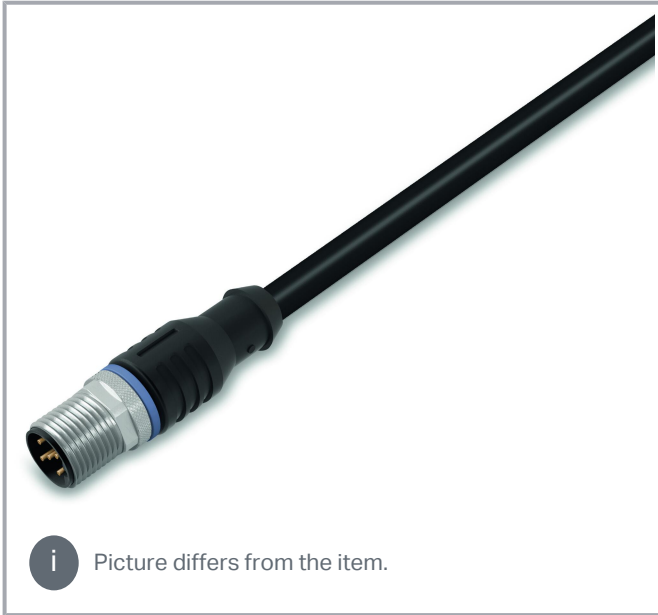

i Picture differs from the item.

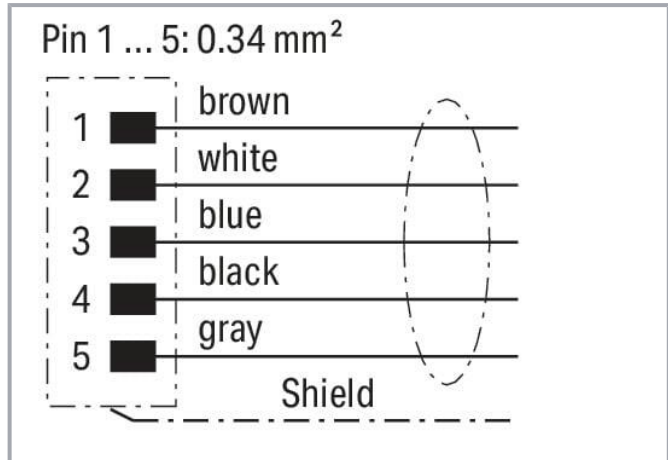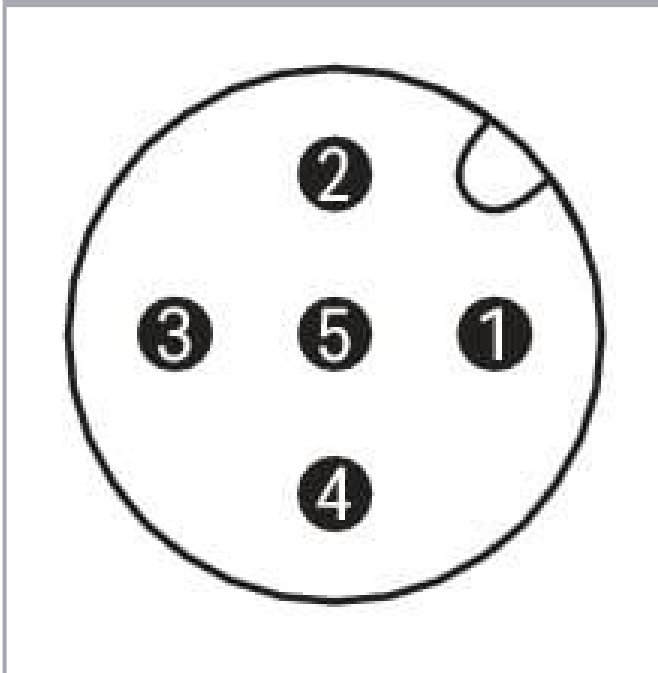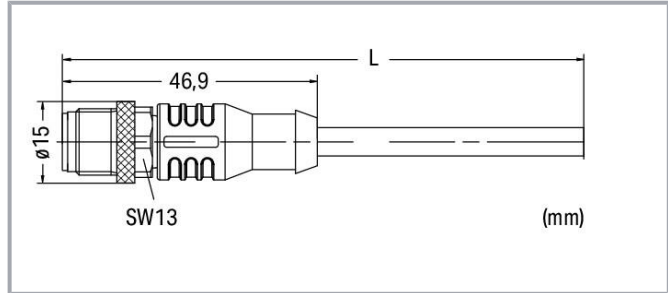

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Item description

Short description:

- PUR, halogen-free
- Suitable for drag chains
- High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
- High chemical resistance
- Cable used: UL listed

Data

Technical data

General

Operating voltage	250 VAC/DC
Operating current	4 A
Rated surge voltage	1.5 kV
Contact resistance	10 mΩ
Conductor resistance	≤ 60 Ω/km
Pollution degree	3 per VDE 0110
Protection type	IP67
Ambient (operating) temperature (static)	-50 ... +90 °C
Ambient (operating) temperature (dynamic)	-25 ... +90 °C

Suitable for drag chains

Bending radius	10 x cable diameter (min.)
Bending cycles	2 Mio.
Acceleration (min.)	5
Travel speed (max.)	3.33
Travel path (horizontal) max.	5
Travel path (vertical) max.	2
Torsional capacity	180

Cable

Cable length	10 m
Type code	LiF9YH-11YH or LiF9YC11YFHF

Subject to changes. Please also observe the further product documentation!



Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black
Sheathed cable diameter	6.3 ... 6.7 mm

Connector

Connection type	M12 plug - free end
Cable connection direction to mating direction	0°
Connector interface coding (cable/adaptor) 1 1	A-coded
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	1 Nm

Commercial data

eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	HU
GTIN	4045454942199
Customs tariff number	85444290900

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	e403bf35-dac9-4a86-a3fc-4f6869cb4a9c
SCIP notification number (Belgium)	09d02549-2b7c-4b16-976b-cddaa015d572
SCIP notification number (Bulgaria)	731de109-d79c-42a1-865b-24e46122e3ee
SCIP notification number (Czech Republic)	65ac237f-2539-4391-b88e-524554d70758
SCIP notification number (Denmark)	50f9e57f-1046-4c7f-9020-f903f6986db1
SCIP notification number (Finland)	6f0640f0-2b05-4a15-907d-d33a28f14dda

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com


Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



SCIP notification number (France)	62850080-ade3-4e59-afc4-44a036df6a3a
SCIP notification number (Germany)	5f218f28-cd07-41d4-8cf7-4f27c6f559f9
SCIP notification number (Hungary)	42b6ae4b-e13f-4f30-903b-addeba6692dc
SCIP notification number (Italy)	77393ac8-835a-4e70-80a1-7929b89f7ebc
SCIP notification number (Netherlands)	a9689b00-02e1-4b96-ade6-357a2145131b
SCIP notification number (Poland)	77f04905-978c-4845-bf44-cb3142245194
SCIP notification number (Romania)	9f5ab814-5c2c-4f42-99a3-b00a3263cf4b
SCIP notification number (Sweden)	1bcff06c-f0a2-4277-a81d-113f9d31f1b3

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 2238	E519602

Downloads

Documentation

Bid Text

756-5311/060-100 X81 - Datei	2019 Feb 19	xml 3.4 kB	Download
756-5311/060-100 doc - Datei	2017 Sep 20	doc 27.6 kB	Download

System Description

IP67 Cables and Pluggable Connectors	pdf 161.6 kB	Download
--------------------------------------	-----------------	----------

CAD/CAE-Data

CAE data

WSCAD Universe 756-5311/060-100	URL	Download
WSCAD Universe 756-5311/060-100	URL	Download

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-5311/060-100

URL

Download

Sensor/Actuator cable; M12A plug; straight; 5-pole; Length: 10 m

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.