


т	۵	н т	m	0

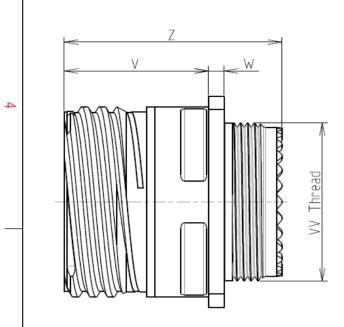

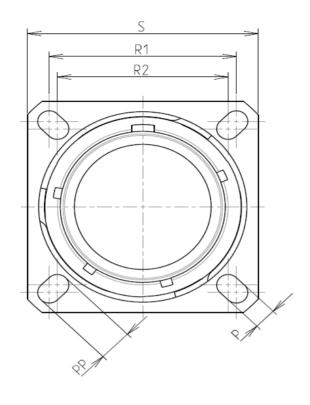



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

1	-Shell Material	: Aluminium			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts : Copper Alloy				
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy 0.8 μm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered without Souriau contacts				
	-Temperature Range	: -65°C to +200°C			
	-Salt Spray	: 48 hours			
+	-Mass	: 11.02 g ± 10%			

8D 0

G

11

F

02

Ρ

F

D L

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g

Delivered W/O Contacts


CONTACT LAYOUT : 11-02


CONTACT TYPE : PIN(500 Matings)

Е

ORIENTATION : D

D



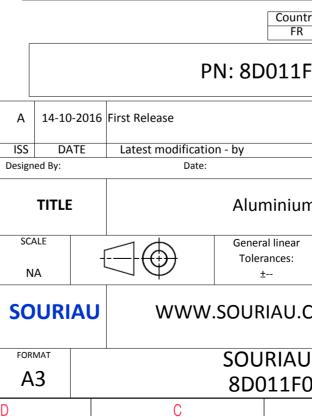

σ		⊳	_		
R			4		
AS EXAMPLE			3		
r any non-conformit s which does not co er of the Parties or I ndation, technical n untry Jurisc FR 1FO2PDL	mply with by a third party	ist	2		
			_		
	CUSTOMER DR	MOD N°			
um Receptac	m Receptacle 8D series				
ar :	NPRDS / PROJECT 859				
J.COM	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
U DRG N°	1	SHEET 1/2			
F02PDL-C B		A 1/2]		

ſ	工	Q	т	m	D	0
		Contact Layout				Panel Cutou
4	.v (2.	+Y IB IA +Y +X +X 95 -Y .095 (2.4imm)			Σ -	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Cont posit ID A B Shell Arrangement size no. 11 -2	Vin (mm) X-axis (mm) Y-axis (mm) +.095 (2.41) +.000 (.00) 095 (2.41) +.000 (.00)	tact tion li		¥ (Dim
ى نى						ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendat
C						PN: 8D011F
					A 14-10-201 ISS DATE Designed By:	16 First Release Latest modification - by Date:
<u> </u>					SCALE NA	General linear Tolerances:
					FORMAT	J WWW.SOURIAU.C SOURIAU
		2		- T	A3	8D011F0
	Н	G	F	I E	D	C

