

т	۵	п –	m	0



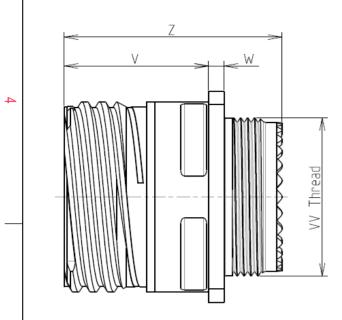

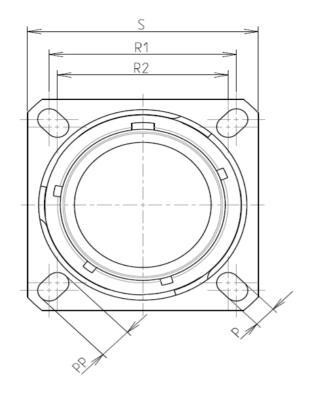

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium		
-Shell Plating	: Black Zinc Nickel		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
-Durability	: 500 Mating cycles		
-Delivered with Souriau contacts and Accessories			
-Temperature Range	- 65°C to +175°C		
-Salt Spray	: 500 hours		

: 14.89 g ± 10%

8D 0

G

11

Ζ

04

S


F

Ν

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

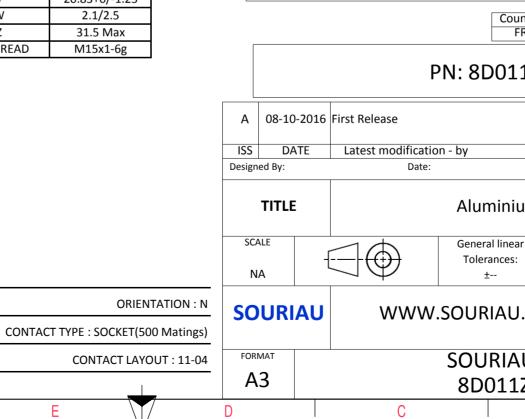

	σ			А			
		•					4
	~	0					4
	6/12						
	0	~					
		1					
							3
S EXAM	PLE						3
	n-conformit						
	does not co Parties or b						
	ation, technical notice.)						
untry	y Jurisdiction & Control List						
R	Not Listed						
1Z04	LZO4SN						
					J		
					N	IOD N°	
		CUST	OMER D	RAWING			
um Re	eceptacl	e 8D	series				
ar	NPRDS / PROJECT						
		INP	859 859	UJLCI			1
	_	T		ent is the prop SOURIAU	perty o	of	
J.CON	VI.		it must no	t be reproduced without per		on	
וח וו	RG N°					SHEET	
	SN-C					1/2	
	В			А			ı

_	Ŧ	۵	п –	m	D	<b>O</b>	
		Contact Layout				Panel C	Cutou
4	-X	$ \begin{array}{c}                                     $			A	SQUARE FLANGE RECEPTACLE (TYPE O) REAR MOUNTING	
	Shell Arrangement Numt size no. cont size 4 4	X-axis (mm)         Y-axis (mm)           + 0.65 (1.65)         .065 (1.65)           + 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)			2	ØT.	
ω						Dim ØA ØAA R1 ØT	
	-					SOURIAU shall not be liable fo due to a use of the Produc the Specifications issued by eith (professional recomme	ts wh her of
N							ountr FR
						PN: 8D0	112
					ISS DATE Designed By: TITLE	Latest modification - by Date: Alumin	ium
<b>_</b>					SCALE NA	General line Tolerance ±	25:
					FORMAT A3	SOURI	AU
	Н	G	F	E	D	8D01	12(

