Designed By:       Date:       CUSTOMER DRAWING         TITLE       Composite Plug 8D series         BASIC SERIES:       8D       5       -       13       J       03       J       D         SHELL TYPE : Plug with RFI Shielding       -       13       J       03       J       D       Environment is the property of the p	<b>⊥</b>			0	∞ >	>
Characteristics         • Standard: Based on MIL-DTL-38999 Series II         • Shell Material       : Composite         • Sourcass       : Composite         • Contacts       : Composite         • Contacts       : Silicon Elastomer         • Contacts Plating       : Solicon Elastomer         • Orability       : Solicon Elastomer		ØS				
CHARACTERISTICS         -Standard: Based on MIL DTL-38999 Series III         -Shell Material       : Composite         -Shell Material       : Comper Alloy         -Seals & Grommet       : Silicon Elastomer         -Contact Plating       : Gold over copper Alloy 0.8µm minimum         -Delviered with Souriau contacts and Accessories       -         -Temperature Range       : 65°C to +175°C         -Sait Spray       : 2000 hours         BASIC SERIES:       8D       5       -         8bs/C SERIES:       8D       5       -       13       03       D         HELLTYPE : Plug with RTI Shielding       -       13       03       D       D       -         SHELLTYPE : Plug with RTI Shielding       -       13       03       D       D       -       -       Tite Composite Plug 8D series         -Stell TYPE : Plug with RTI Shielding       -       13				LAYOUT SHOWN AS EXA	AMPLE	
Standard : Based on MIL-DTL-38999 Series III       Dim       Dim       Noninal         Shell Material       : Composite       is composite       <		Keying Shown as example				
Shell Material       : Composite         Shell Material       : Composite         Shell Material       : Composite         Shell Material       : Composite         -Shell Material       : Composite         -Contacts       : Composite         -Contact Plating       : Gold over copper Alloy 0.8µm minimum         -Durability       : 500 Mating cycles         -Delivered with Souriau contacts and Accessories       -         -Temperature Range       : - 65'C to +175'C         -Salt Spray       : 2000 hours         BASIC SERIES:       8D       5         8b 5       -       13       J         SHELL TYPE       : Plug with RFI Shielding       -			7			
-Contact Plating : Gold over copper Alloy 0.8µm minimum   -Durability : 500 Mating cycles   -Delivered with Souriau contacts and Accessories   -Temperature Range : -65°C to +175°C   -Salt Spray : 2000 hours     A 17-10-2016   First Release   ISS   DATE   Latest modification - by   Mot   Designed By:   Date:   CUSTOMER DRAWING   Designed By:   Date:   CUSTOMER DRAWING   SALE   SHELL TYPE:   Plug with RF1 Shielding     13   J   03   J   D     SCALE   NA   Composite Plug 8D series   SCALE   NA   Tolerances:   859   2	-Shell Material: Composite-Shell Plating: Olive drab Cadmium-Insulator: Thermoplastic-Contacts: Copper Alloy	Z' 31.5 Max		due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)		
<ul> <li>Delivered with Souriau contacts and Accessories</li> <li>Temperature Range : -65°C to +175°C</li> <li>Salt Spray : 2000 hours</li> <li>A 17-10-2016 First Release</li> <li>ISS DATE Latest modification - by</li> <li>Motor Designed By: Date: CUSTOMER DRAWING</li> <li>TITLE Composite Plug 8D series</li> <li>SCALE General linear Tolerances: 859</li> <li>SHELL TYPE : Plug with RFI Shielding</li> </ul>	-Contact Plating : Gold over copper Alloy 0.8µm minimum			FR	Not Listed	
A 17-10-2016 First Release A 17-10-2016 First Release ISS DATE Latest modification - by Designed By: Date: CUSTOMER DRAWING Designed By: Date: CUSTOMER DRAWING TITLE Composite Plug 8D series SCALE NA General linear Tolerances: 859 ± This document is the property of	-Delivered with Souriau contacts and Accessories			PN: 8D513J	03JD	
BASIC SERIES:       8D       5       -       13       J       03       J       D       Image: Composite Plug & Date: Customer Drawing       General linear Tolerances: Tolera	-		A 17-10-2010	6 First Release		
BASIC SERIES:       8D       5       -       13       J       03       J       D         SHELL TYPE       Plug with RFI Shielding       SCALE       General linear       NPRDS / PROJECT         MA       -       -       859         This document is the property of       This document is the property of				-	CUSTOMER DRAWING	MOD N°
BASIC SERIES.     8D     5     -     15     J     05     J     D       MINDS/ HOSECI       SHELL TYPE : Plug with RFI Shielding				TITLE Composite Plug 8D ser		
This document is the property of		03 J D		-[ -(		
it must not be reproduced or	CONTACT TYPE : Standard Crimp Contact			WWW.SOURIAU.CO	OM SOURIAU it must not be repro	duced or
SHELL SIZE : 13       CONTACT TYPE : SOCKET (1500 Matings)       communicated without permission         PLATING : J = Olive drab Cadmium       CONTACT LAYOUT : 13-03       FORMAT       SOURIAU DRG N°       SI				SOURIAU		SHEET
			A3			1/2

	T	Q	г	m	D		0	
		Contact Layout						
4								
	Ctc A B C	3#16 13-03 X Y 2.39 1.47 0 -2.79 -2.39 1.47						
ယ								
						du	RIAU shall not be l ue to a use of the ecifications issued (professional re	Products v by either
N								Cour
							PN:	8D51
						10-2016 First Rele		
					ISS Designed By:		modification - by Date:	
					ТІТ	LE		Comp
<u> </u>					SCALE NA			neral linear plerances: ±
					SOUF	RIAU	www.sol	
					FORMAT		SO	URIAU D513
							0	212

G


Н

F

Е

D

С

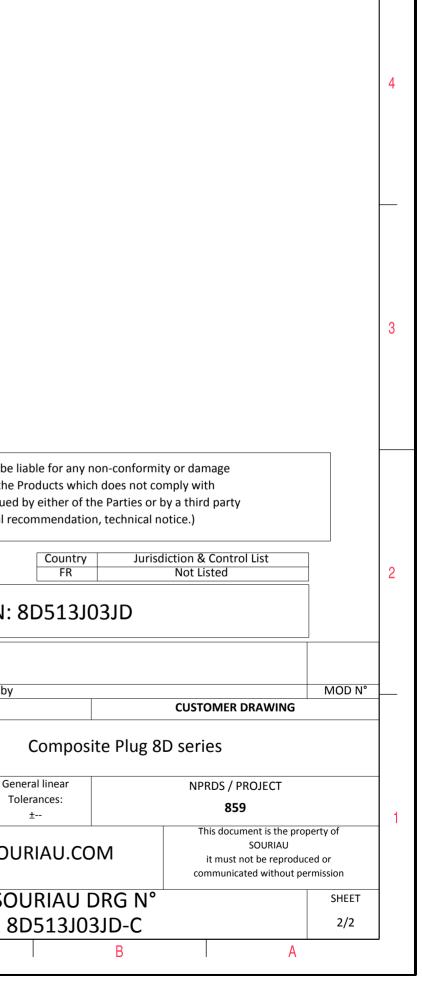

 $\triangleright$ 

σ