





ISSUE NUMBER	
ORIGINAL	1

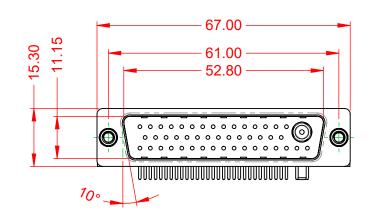




.XX ±0.13 .XXX ±0.05

NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C	
POWER/CO-AX CONTACT RATING: (IF PRESENT)	20A (CURRENT)	
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.	(
INSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.	

WITHSTANDING VOLTAGE:

1000V AC rms



		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
	-		DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC TORONTO, ONTARIO CANADA	CANADA ARE THE PROPERTY OF EDAC INC., AND TORONTO, ONTARIO SHALL NOT BE REPRODUCED, OR COPIED CANADA OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
			DRAWING NUMBER: 629-47W	1640-2N6	ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-47W	1640-2N6	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

