

т	ם ا	н п	 D	0



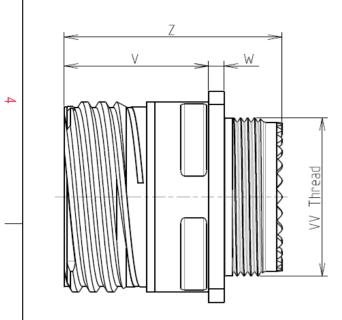

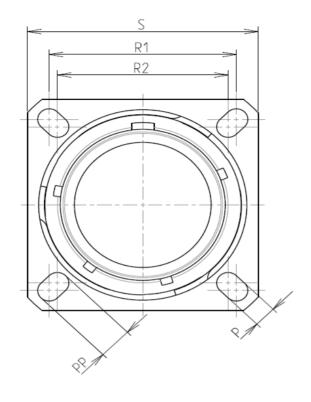

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium				
	-Shell Plating	: Black Zinc Nickel				
	-Insulator	: Thermoplastic				
	: Copper Alloy					
	-Seals & Grommet	: Silicon Elastomer				
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum				
	-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories						
	-Temperature Range	: -65°C to +175°C				
	-Salt Spray	: 500 hours				

: 15.07 g ± 10%

8D 0

G

11

Ζ

05

В

F

Ν


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

ORIENTATION : N

CONTACT LAYOUT : 11-05

CONTACT TYPE : SOCKET(500 Matings)

Е





	σ			А					
		•					4		
A							Ŧ		
	1° (]#	2750 2750 2750							
Ч									
		1							
CEV	AMPLE						3		
NO EXA	AIVIP LE								
any non-conformity or damage which does not comply with									
er of the Parties or by a third party ndation, technical notice.)									
untry	lurise	liction &	Control Li	st]				
FR	Julise	Not Li		51]		2		
1Z05BN									
]				
		CUST	OMER DR	WING	M	OD N°			
um	Receptad	le 8D	series						
	Receptacle 8D series								
ar :		NP	RDS / PRO. 859	JECT			1		
This document is the property of SOURIAU									
J.CC	DM		it must not k mmunicated	e reproduc		on			
	DRG N°					HEET			
	5BN-C					1/2			
	В			А			,		

	т	۵	п	т		0
		Contact Layout				Panel Cutou
4	×.	$ \begin{array}{c} & & & \\ & $			A	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Conta positi ID A B C C D E Shell Arrangement Numb	X-axis Y-axis (mm) (mm) +065 (1.65) +056 (1.42) +.113 (2.87) 065 (1.65) +.000 (0.00) 130 (3.30) 113 (2.87) 065 (1.65) 065 (1.65) +.056 (1.42)	1		* *	
ى س	size no. conta 11 -5 5					Dim ØA ØAA R1 ØT
	_					
						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						PN: 8D0112
						2016 First Release
					ISS DAT Designed By: TITLE	E Latest modification - by Date: Aluminium
→					SCALE NA	General linear Tolerances:
					SOURIA	
					FORMAT A3	SOURIAU 8D011Z0
	Н	G	F	E \	D	C

