


THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25




ISSUE NUMBER

(1)

ORIGINAL



NOTES:

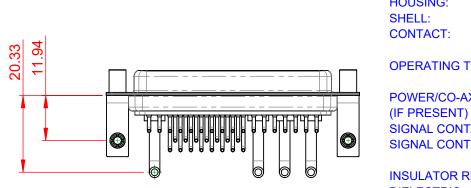

| MATERIAL: | |
|-----------|--|
| HOUSING: | |
| SHELL: | |
| CONTACT: | |
| | |

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED

OPERATING TEMPERATURE:


.XX ±0.13

POWER/CO-AX CONTACT RATING: 20A (CURRENT)

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE: 5000MΩ min.

1000V AC rms

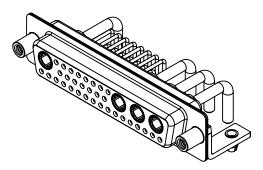

| COMBINATION D-SUB | | SW REFERENCE NO.: 630 COMBO ASSEMBLY | | | |
|--------------------------------------|--------------------------------------------------------------------------------------------------------|----------------------------------------------------|--------------------|-------------|-------|
| | | DRAWN: C.B | DATE: JAN. 01/2019 | | |
| | | | CHECKED: DATE: | | |
| EDACINC | ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE | SCALE: (IN C.A.D. 1:1) | SHEET 1 OF | 2 | |
| TORONTO, ONTARIO CANADA | | DA OR USED AS THE BASIS FOR THE DRAWING NUMBER: 03 | | W4250-2N5 I | ISSUE |
| YOUR CONNECTION TO QUALITY & SERVICE | MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | PART NUMBER: 630-36W4 | 4250-2N5 | 1 | |



COMPLIANT

THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. -55°C ~ 125°C

