

т	۵	н <b>т</b>	m	0



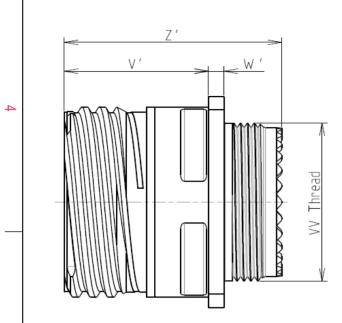



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite				
-Shell Plating	: Olive drab Cadmium				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: -65°C to +175°C				

: 2000 hours

8D 0

G

11

J

22

J

F

Е


Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Ζ'	32 Max
/V THREAD	M15x1-6g


ORIENTATION : E

CONTACT LAYOUT : 11-22

CONTACT TYPE : SOCKET (1500 Matings)

Е



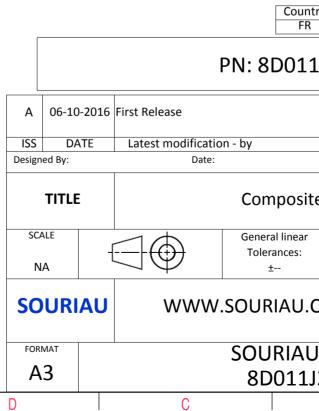

	ω		A		
					4
					3
	AMPLE			]	
s whic er of t idatio	non-conformit ch does not co he Parties or t on, technical n	mply with by a third part otice.)			
untry FR	Jurisd	liction & Cont Not Listed	rol List		2
11J	22JE				
				MOD N°	
		CUSTOME	R DRAWING		
	Receptacl				
ar			PROJECT 59		1
J.CC	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	DRG N°			SHEET	
τJζ	2JE-C B		A	1/2	J

4	(	Contact Layout				SQUARE FLANGE RECEPTACLE REAR MOUNTING	Panel Cur
	Ctc	4#22D 11-22 X Y	]				ØT
ω	A B C D	1.905       1.905         1.905       -1.905         -1.905       -1.905         -1.905       1.905					Dim ØA ØAA R1 ØT
	-					due to a us the Specification	l not be liable for e of the Products ns issued by either sional recommend
N							PN: 8D01
						0-2016 First Release DATE Latest modificat	ion - by
_ <b>_</b>					TITL SCALE NA	E T	Composi General linear Tolerances: ±
					FORMAT A3	IAU WWW	V.SOURIAU SOURIA 8D011
l	Н	G	F	E	D	C	
					*		

Т

ш

т

G

0

