

T	G	П	m	0



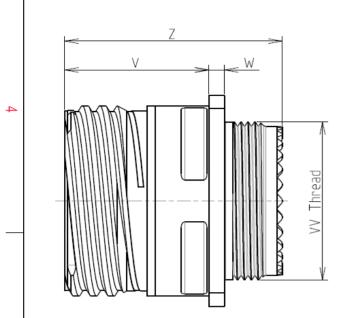

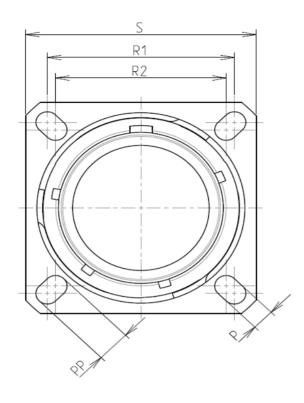

Keying Shown as example

CHARACTERISTICS

ω

 \mathbf{N}

-Mass

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel : Nickel -Shell Plating : Thermoplastic -Insulator -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet : Gold over copper Alloy 0.8 μm minimum -Contact Plating : 500 Mating cycles -Durability -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C -Salt Spray : 500 hours

: 29.53 g ± 10%

Connector dimension Nominal Dim 3.25±0.2 Р 4.93±0.2 PP R1 20.62 R2 18.26 S 26.2±0.3 20.83+0/-1.25 V W 2.1/2.5 Ζ 31.5 Max VV THREAD M15x1-6g

D	0		Φ		A		1	
							4	
	LAY	OUT SHOWN AS EXA	AMPLE				3	
	due to a use the Specifications	not be liable for any i of the Products whic issued by either of t onal recommendatio Country FR	h does not co he Parties or b n, technical no	mply with by a third party	l List		2	
	Р	N: 8D011S	D1AD					
A 07-10-2016 ISS DATE Designed By:	First Release Latest modificatio Date:	n - by		CUSTOMER	DRAWING	MOD N°		
TITLE	TITLE Stainless Steel Receptacle 8D series							
SCALE -	$\bigcirc \bigcirc$	General linear Tolerances: ±	DM NPRDS / PROJECT 859 This document is the pro SOURIAU it must not be reproduc communicated without pe				1	
SOURIAU	WWW.	SOURIAU.CC				d or		
FORMAT A3	SOURIAU DRG N° 8D011S01AD-C							
D	С		В		А		-	

<u> </u>	BASIC SERIES: 8D 0 SHELL TYPE : Square Flange Receptacle	-	11	S	01	A	D				SCALE NA	-	$\square \bigoplus$	General linear Tolerances: ±
	CONTACT TYPE : Standard Crimp Contact									ORIENTATION : D	SOUR	Δ	\\/\\/\/\/	.SOURIAU.
	SHELL SIZE : 11								CONTACT TYPE	: PIN(500 Matings)	Joon			
	PLATING : S = Nickel								CONTA	CT LAYOUT : 11-01	FORMAT			SOURIA
											A3			8D0115
	H G					F			E		D		С	

	Ξ	۵	<u>п</u>	m		0	
		Contact Layout				Panel Cut	out
4		01			A	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Ctc	1#12 11-01 X Y]		₩ ₩	ØA ØT	Q
ယ	A	0 0				Dim ØA ØAA R1 ØT	
						SOURIAU shall not be liable for a due to a use of the Products w the Specifications issued by either	whi of
2						(professional recommend Cour FF PN: 8D011	ntry R
	-				A 07-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:	
-					SCALE NA	Stainless S General linear Tolerances: ±	
	H	G	F	E	FORMAT A3	U WWW.SOURIAU. SOURIAU 8D0115	U
	11			· • \	\bigvee		

