


I I I I I I I I I I I I I I I I I I I	D G	н п	m	D	0

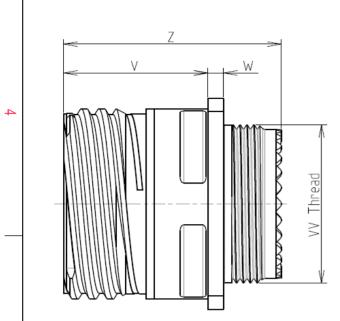

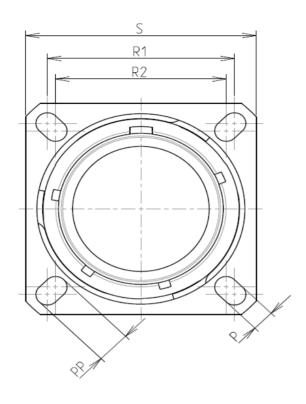



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel		
N	-Shell Plating	: Nickel		
	-Insulator	: Thermoplastic		
	-Contacts	: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum		
	-Durability	: 500 Mating cycles		
	-Delivered with Souriau contacts and Accessories			
	-Temperature Range	 -65°C to +200°C 		
	-Salt Spray	: 500 hours		
	-Mass	: 69.58 g ± 10%		

8D 0

G

17

-

S

75

А

F

В


Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	26.97		
R2	24.61		
S	33.3±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M25x1-6g		


ORIENTATION : B

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 17-75



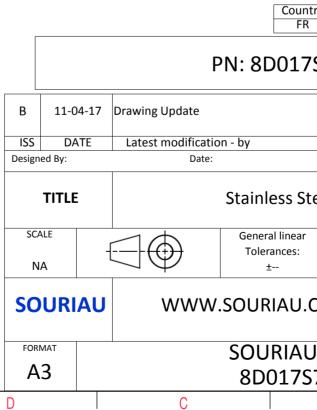

Φ		А			
				4	
AS EXAMPLE				3	
s which does no er of the Parties ndation, technic	s or by a third part			2	
	CUSTOME	R DRAWING	MOD N°	—	
Steel Receptacle 8D series					
ar :	NPRDS / PROJECT 859				
J.COM	This document is the property of				
U DRG N S75AB-0			SHEET 1/2		
B		A			

	工	۵	н г	m		0	
		Contact Layout					Panel Cuto
4		75 () ()			π	SQUARE FLANGE RECEPTACLE (TYPE 0)	
	Ctc A B	2#8 Triax 17-75 X Y 0 4.75 0 -4.75			¥	Max. thickness panel for receptacle: T	
പ						Dim ØA ØA	A A
						R1 ØT	
	-						
	-					SOURIAU shall not be l due to a use of the the Specifications issued (professional re	Products w d by either
⊳0						 PN· {	Coun FR 8D017
						7 Drawing Update	
					ISS DATE Designed By:	Latest modification - by Date:	
					TITLE		inless St
<u> </u>					SCALE NA		neral linear olerances: ±
					SOURIA	U WWW.SOL	JRIAU.
				_	FORMAT A3	SO 8	URIAU D0175
l	Н	G	F	E	D	С	

