
г Q I	п	D	0	σ			7
Image: state stat				N AS EXAMPLE			4
	hown as example						
CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III	Connector dimension Dim Nominal						
<ul> <li>-Shell Material : Composite</li> <li>-Shell Plating : Without Plating</li> <li>-Insulator : Thermoplastic</li> <li>-Contacts : Copper Alloy</li> <li>-Seals &amp; Grommet : Silicon Elastomer</li> <li>-Contact Plating : Gold over copper Alloy 0.8µm minimum</li> </ul>	ØS35.7 MaxZ31 MaxVV THREADM25x1-6g	SOURIAU shall not be liable for any non-conformity or damage         due to a use of the Products which does not comply with         the Specifications issued by either of the Parties or by a third party         (professional recommendation, technical notice.)         Country       Jurisdiction & Control List         FR       Not Listed					2
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories			PN: 8D517X22PC				
-Temperature Range : -65°C to +175°C -Salt Spray : 2000 hours		A 18-10-201	A 18-10-2016 First Release				-
		ISS DATE Designed By:			MOD N°	╞	
		TITLE				_	
→ BASIC SERIES: 8D 5 - 17 X 22 P SHELL TYPE : Plug with RFI Shielding	c	SCALE NA	General Tolerar ±	ices:	NPRDS / PROJECT 859		-
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 17	CONTACT TYPE : PIN(500 Mating	-   SUURIAL	SOURIAU WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permissio			d or	
PLATING : X = Without Plating	CONTACT LAYOUT : 17-2	22 FORMAT	SOUF	IAU DRG N°		SHEET	-
		A3	8D5	17X22PC-C		1/2	
H G F	E	D	C	В	A		

	т	۵	г	m	D	0	
4		Contact Layout 22					
	Ctc A B C D	2#12 2#8 Triax 17-22 X Y 0 4.57 6.32 0 0 -4.57 -6.32 0					
						SOURIAU shall not be liable f due to a use of the Produc the Specifications issued by eit (professional recomm	icts w ther c
N							Count FR
_					ISS DATE Designed By:	Date:	
-					SCALE NA SOURIA	General lir Tolerance ±	ces:
	Н	G	F	E	FORMAT A3 D	SOURI 8D51	IAL

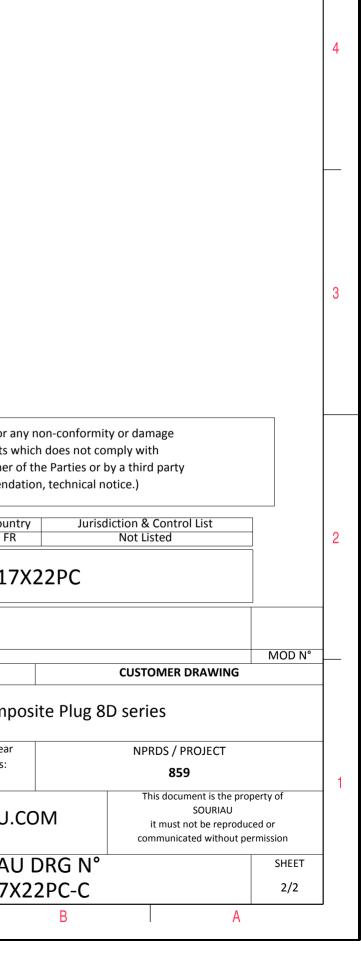

σ