



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER

(1)





NOTES:



MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, Sn or Ni PLATED CONTACT: COPPER ALLOY SEE ORDERING GUIDE FOR PLATING


OPERATING TEMPERATURE: -55°C ~ 125°C


SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: 10mΩ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

COMBINATION D-SUB		SW REFERENCE NO.: 627 COMBO ASSEMBLY			
		DRAWN: C.B	DATE: JAN. 01/20	19	
		CHECKED:	DATE:		
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4	
	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 627-3W3-224-3N1		ISSUE	
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 627-3W3	-224-3N1	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



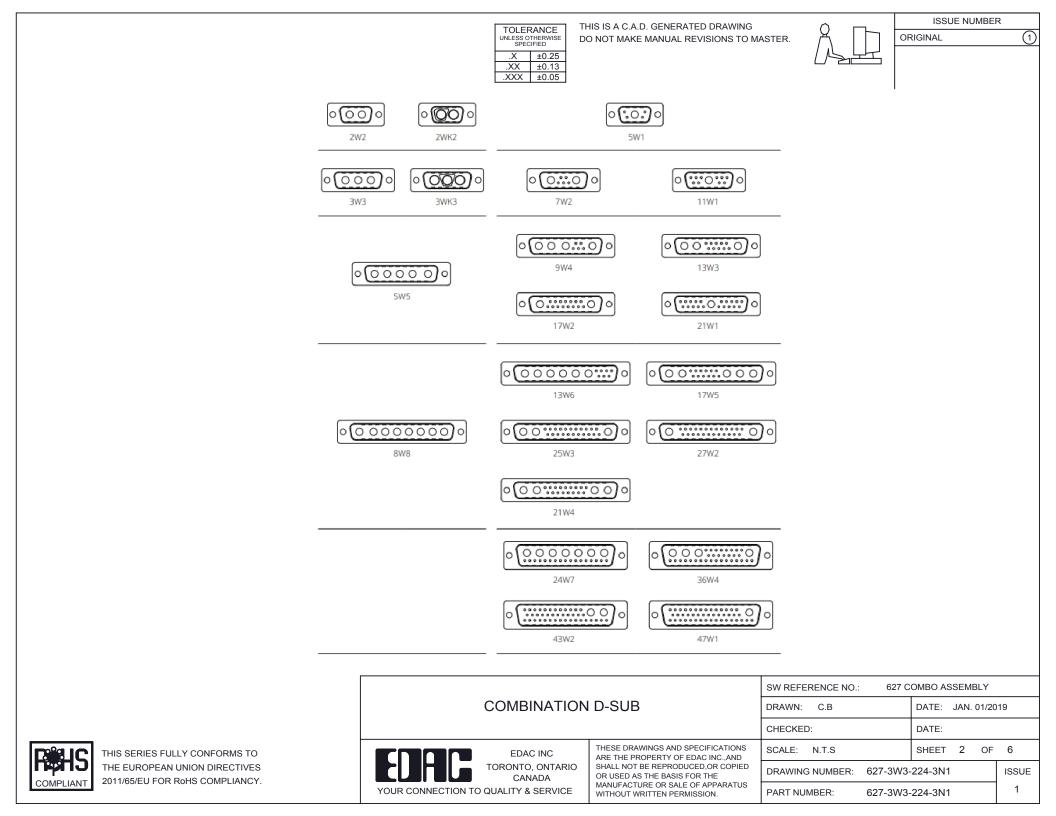

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25 .XX ±0.13 .XXX ±0.05



 $\overline{(1)}$


2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female






21W4 Male/Female



27W2 Male/Female




21W1 Male/Female



COMBINATION D-SUB		SW REFERENCE NO.: 627 COMBO ASSEMBLY			
		DRAWN: C.B	DATE: JAN. 01/2019		
		CHECKED:	DATE:		
EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: N.T.S	SHEET 3 OF	4	
		DRAWING NUMBER: 627-3W3	-224-3N1	ISSUE	
		PART NUMBER: 627-3W3	-224-3N1	1	

5W5 Male

5W5 Female





47.05

23.53


8W8 Male

8W8 Female





11W1 Male/Female




17W2 Male/Female

30A / 3.7 40A / 4.2

CURRENT RATING / ØA 10A / 2.2 20A / 3.3





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



22.83







 TOLERANCE
 THIS IS A C.A.D. GENERATED DRAWING

 UNLESS OTHERWISE
 DO NOT MAKE MANUAL REVISIONS TO MASTER.

 .X
 ±0.25



25W3 Female


36W4 Female






25W3 Male







47.06 9.70 - 14.51 3 3 3 2 6 1 - 14.51









13W3 Male









30.50 15.62 15.62 15.22 15

13W6 Male



43W2 Male






17W5 Female

.XX ±0.13 .XXX ±0.05


9W4 Female

13W3 Female



43W2 Female


47W1 Female





17W5 Male



47W1 Male







	COMBINATION D-SUB		SW REFERENCE NO.: 627 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20)19	
			CHECKED:	DATE:		
FORMS TO	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: N.T.S	SHEET 4 OF	4	
DIRECTIVES DMPLIANCY. Y(SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 627-3W	'3-224-3N1	ISSUE	
			PART NUMBER: 627-3W	'3-224-3N1	1	

THIS SERIES FULLY CONFO THE EUROPEAN UNION DIF 2011/65/EU FOR RoHS COM