


SBC2-3R3-352

Aliases (UPIN23R3352000) KEMET, SBC2, Power, 3.3 uH, 20%, 4mm

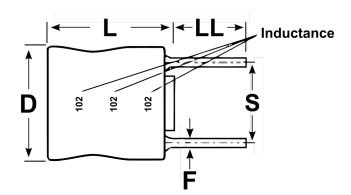

General Information		
Series	SBC2	
Style	Through-Hole	
Description	Radial Leaded, Ferrite Power Inductors	
Features	DC-DC Converters, Nickel-Zinc (NiZn) Ferrite Core	
RoHS	Yes	
Lead	Wire Leads	
Core	Ferrite	
Miscellaneous	Soft Lead Terminal	

Specifications				
Inductance	3.3 uH			
Inductance Tolerance	20%			
Temperature Range	-20/+105°C			
Shielded	No			
Current	3.5 Amps			
DC Resistance	0.03 Ohms			

Click here for the 3D model.

Dimensions	
D	7mm MAX
L	8mm MAX
S	4mm NOM
LL	3.5mm +1/-0.5mm
F	0.45mm NOM

De altre alle a	C
Packading	Specifications

Component Weight	629 mg
Packaging	Bulk
Packaging Quantity	3750

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.