

PA578-01-01C


ITEMS		MODEL		SWS1000L	SWS1000L	SWS1000L	SWS1000L	SWS1000L	SWS1000L	SWS1000L	
		-3	-5	-12	-15	-24	-36	-48	-60		
1	Nominal Output Voltage	V	3.3	5	12	15	24	36	48	60	
2	Maximum Output Current (Peak Output Current) (* 1)	A	200	200	88	70	44 (51)	29	22 (25)	17	
3	Maximum Output Power (Peak Output Power) (* 1)	W	660	1000	1056	1050	1056 (1224)	1044	1056 (1200)	1020	
4	Efficiency (Typ) (115/230VAC) (* 2)	%	75 / 77	79 / 81	82 / 84	82 / 84	84 / 86	84 / 86	84 / 86	84 / 86	
5	Input Voltage Range (* 3)	85 ~ 265VAC (47-63Hz) or 120 ~ 350VDC									
6	Input Current (Typ) (115/230VAC) (* 2)	A	8 / 4		12 / 6						
7	Inrush Current (Typ) (* 4)	-	20A/40A at 115VAC, 40A/40A at 230VAC, Ta=25°C (first inrush/second inrush)								
8	PFHC	-	Designed to meet IEC61000-3-2								
9	Power Factor (Typ) (115/230VAC) (* 2)	-	0.98 / 0.95								
10	Output Voltage Range	V	2.64~3.96	4.0~6.0	9.6~14.4	12.0~19.5	19.2~28.8	28.8~43.2	38.4~56.0	48.0~66.0	
11	Ripple and Noise (115/230VAC) (* 5)	0 ≤ Ta ≤ 74°C	mV	120	120	150	150	150	200	200	200
		-20 ≤ Ta < 0°C	mV	160	160	180	180	180	240	240	240
12	Line Regulation (* 6, 7)	mV	20	20	48	60	96	144	192	240	
13	Load Regulation (* 6, 8)	mV	30	30	72	90	144	216	288	360	
14	Temperature Coefficient	-	Less than 0.02%/°C								
15	Over Current Protection (* 9)	A	210~	210~	92.4~	73.5~	51.6~	30.5~	25.3~	17.9~	
16	Over Voltage Protection (* 10)	V	4.12~5.61	6.25~7.25	15.0~17.4	20.2~23.4	30.0~34.8	45.0~52.2	58.5~68.2	69.0~81.0	
17	Hold-Up Time (Typ) (115/230VAC) (* 2)	-	20ms								
18	Leakage current (Typ) (* 11)	-	0.1mA at 115VAC, 60Hz / 0.2mA at 230VAC, 60Hz								
19	Remote Sensing	-	Possible								
20	Remote ON/OFF control	-	Possible								
21	Monitoring Signal	-	ALM (Open Collector Output)								
22	Parallel Operation	-	Possible								
23	Series Operation	-	Possible								
24	Operating Temperature (* 12)	-	- 20 ~ + 74 °C (-20°C ~ +50°C: 100%, +74°C: 50%) 100% load start up at -40°C								
25	Operating Humidity	-	20 ~ 90 %RH (No dewdrop)								
26	Storage Temperature	-	- 40 ~ +85°C								
27	Storage Humidity	-	10 ~ 95%RH (No dewdrop)								
28	Cooling	-	Forced air by build-in fan								
29	Withstand Voltage	-	Input - Output : 4.0kVAC (20mA), Input - FG : 2.0kVAC (20mA) Output - FG : 500VAC (100mA) (60V model: 651VAC(130mA)), Output - CNT/ALM/AUX : 100VAC (100mA) for 1min.								
30	Isolation Resistance	-	Input - FG, Input - Output and Output - FG: More than 50MΩ (500VDC) Output - CNT/ALM/AUX: More than 50MΩ (100VDC) at Ta=25°C and 70%RH								
31	Vibration (* 13)	-	Designed to meet MIL-STD-810F 514.5 Category 4, 10								
32	Shock (In package)	-	Designed to meet MIL-STD-810F 516.5 Procedure I,VI								
33	Safety (* 14)	-	Approved by UL62368-1, CSA62368-1, EN62368-1, UL60950-1, CSA60950-1, EN60950-1 (Expire date of 60950-1 : 20/12/2020), EN50178, UL60601-1, EN60601-1, CSA-C22.2 No.601.1-M90, Designed to meet DENAN, EN61010-1.								
34	Line Dip	-	Designed to meet SEMI-F47 (200VAC line only)								
35	EMI	-	Designed to meet VCCI-B, FCC-B, EN55011/EN55032-B								
36	Immunity	-	Designed to meet EN61000-4-2 (Level 2,3), -3 (Level 3), -4 (Level 3), -5 (Level 3,4), -6 (Level 3), -8 (Level 4), -11								
37	Weight (Typ)	-	2.3kg								
38	Dimension (W x H x D)	mm	150 x 61 x 240 (Refer to Outline Drawing)								

* Read instruction manual carefully , before using the power supply unit.

= NOTES=

- * 1: () : Peak Output Current is possible at 170~265VAC input range , operating period at Peak Output Current is less than 10sec, duty less than 35% .
Average output power and current is less than Maximum Output Power and Maximum Output Current.
- * 2: At Maximum Output Power, nominal input voltage, Ta = 25°C.
- * 3: For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100 - 240VAC, 50 / 60Hz on name plate.
- * 4: First/second inrush current, not applicable for the in-rush current to Noise Filter for less than 0.2ms.
- * 5: Please refer to Fig A for measurement point of ripple and noise.
Ripple & noise are measured at 20MHz by using a twisted pair of load wires terminated with a 0.1uF and 47uF capacitor.
- * 6: Measure line & load regulation at output terminal M4 tapped point.
- * 7: 85 - 265VAC, constant load.
- * 8: No load - Full load (Maximum power), constant input voltage.
- * 9: Constant current limit with automatic recovery.
Avoid to operate at overload or dead short for more than 30 seconds.
- * 10: OVP circuit will shutdown output, manual reset (Remote ON/OFF control reset or Re-power on).
- * 11: Measured by each measuring method of UL, CSA, EN and DENAN (at 60Hz), Ta=25°C.
Worst case: < 0.3mA at 264VAC, 63Hz (Normal Condition); < 0.5mA (Single Fault Condition)
- * 12: Refer to Output Derating Curve (PA578-01-02_) for details of output derating versus ambient temperature.
- Load (%) is percent of Maximum Output Power and Maximum Output Current (Item 2 and 3).
Do not exceed derating of Maximum Output Power and Maximum Output Current.
- 100% load start up at -40°C is possible. However, it may not fulfil all the specifications.
- * 13: Category 4 exposure levels: Trunk transportation over U.S. highways, Composite two-wheeled trailer.
- * 14: As for DENAN, designed to meet at 100VAC.


Fig. A



Measurement point for Ripple and Noise.

PA578-01-02




Ta(°C)	LOAD(%)
	Mounting A,B,C
-20~50	100%
74	50%

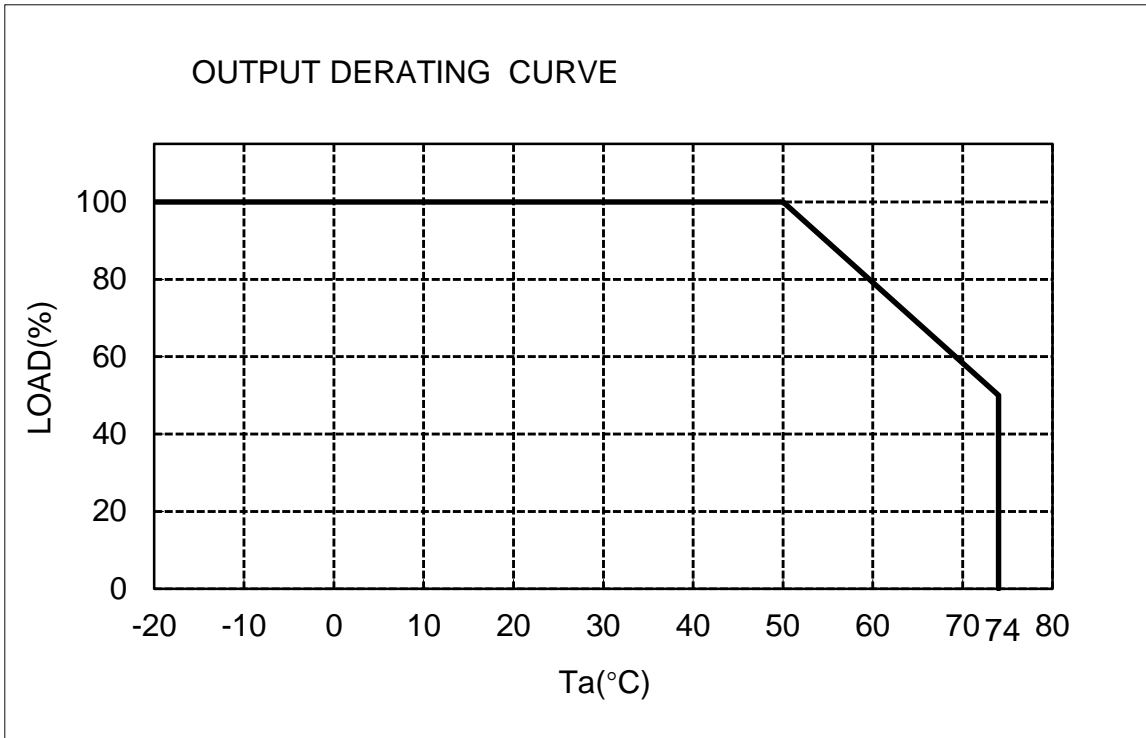

Mounting A

Mounting B

Mounting C

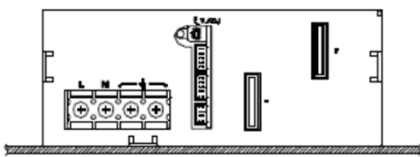

Don't Use

Don't Use

Don't Use

