


## Specification Sheet

Part Number: T18MR0C2

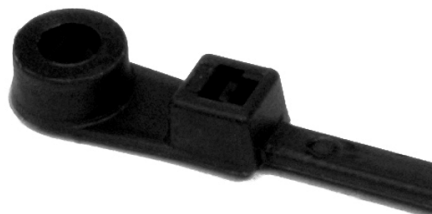

1-Piece Cable Tie/Screw Mount, 4.3" Long, #4 Screw, .79" Max Bundle Dia, 18lb, PA66, Black, 100/pkg

<b>Article Number</b>	113-00022
<b>Type</b>	T18MR
<b>Color</b>	Black (BK)
<b>Features &amp; Benefits</b>	<ul style="list-style-type: none"><li>•Screw mount style creates low insertion and high extraction force.</li><li>•Choose from several tensile strengths and lengths to accommodate a range of applications.</li></ul>
<b>Quantity Per</b>	bag
<b>Product Description</b>	One-piece Screw Mount Cable Ties fasten with a screw or bolt to provide secure routing of cable bundles. Multiple configurations are available to cover a range of bundle sizes and tensile strengths.
<b>Short Description</b>	1-Piece Cable Tie/Screw Mount, 4.3" Long, #4 Screw, .79" Max Bundle Dia, 18lb, PA66, Black, 100/pkg

Global Part Name

T18MR-PA66HS-BK

Minimum Tensile Strength (Imperial)

18.0

Minimum Tensile Strength (Metric)

80

Length L (Imperial)

4.3

Length L (Metric)

110.0

Fixation Method

Fixing hole

Identification Plate Position

none

Releasable Closure

No

Tie Closure

plastic pawl

Variant

Inside Serrated

Width W (Imperial)

0.1

Width W (Metric)

2.5

Bundle Diameter Min (Imperial)

0.06

Bundle Diameter Min (Metric)

1.5

Bundle Diameter Max (Imperial)

0.8

Bundle Diameter Max (Metric)

20.0

Thickness T (Imperial)

0.039

<b>Thickness T (Metric)</b>	1.0
<b>Height H (Imperial)</b>	.17
<b>Height H (Metric)</b>	4.20
<b>Mounting Hole Diameter D (Imperial)</b>	0.12
<b>Mounting Hole Diameter D (Metric)</b>	3.1 mm
<b>Mounting Hole Diameter D Max (Metric)</b>	3.1
<b>Material</b>	Polyamide 6.6 heat stabilized (PA66HS)
<b>Material Shortcut</b>	PA66HS
<b>Flammability</b>	UL 94 V2
<b>Operating Temperature (Metric)</b>	-40°F to +221°F (-40°C to +105°C)
<b>ROHS Complaint</b>	Yes
<b>Certification/Specification WEB</b>	UL
<b>UL Recognized (US)</b>	Yes
<b>UL Recognized (US and Canada)</b>	Yes
<b>Package Quantity(Imperial)</b>	100

**Package Quantity (Metric)**

100

**Customs Number**

3926909988