

# Product data sheet

## Characteristics

# XZCPV11V12L10

Pre wired connectors XZ, straight female, M12, 5 pins, cable PVC 10 m



### Main

|                                    |                                  |
|------------------------------------|----------------------------------|
| Range of Product                   | Telemecanique Cabling components |
| Accessory / separate part category | Cabling accessory                |
| Accessory / Separate Part Type     | Pre-wired connectors             |
| Series name                        | General purpose                  |

### Complementary

|                                |                                       |
|--------------------------------|---------------------------------------|
| Electrical connection          | Straight female connector M12, 5 pins |
| Cable connector fixing         | Screw-on                              |
| Collar material                | Metal                                 |
| Status LED                     | Without                               |
| Cable length                   | 32.81 ft (10 m)                       |
| Cable outer diameter           | 0.20 in (5.2 mm)                      |
| Cable composition              | 5 x 0.34 mm <sup>2</sup>              |
| Wire insulation material       | PVC                                   |
| [Ue] rated operational voltage | 60 V AC<br>75 V DC                    |
| Line Rated Current             | 3 A                                   |
| Contact resistance             | 5000 µOhm                             |
| Minimum insulating resistance  | 1 GΩ                                  |
| Net Weight                     | 0.79 lb(US) (0.36 kg)                 |

### Environment

|                                       |                                   |
|---------------------------------------|-----------------------------------|
| IP Degree of Protection               | IP65<br>IP67                      |
| Product Certifications                | cULus                             |
| Ambient air temperature for operation | -13...176 °F (-25...80 °C) static |
| Ambient Air Temperature for Storage   | -13...176 °F (-25...80 °C)        |

### Ordering and shipping details

|                       |                        |
|-----------------------|------------------------|
| Category              | 22483 - MACHINE CABLES |
| Discount Schedule     | DS3                    |
| GTIN                  | 3389119621526          |
| Nbr. of units in pkg. | 1                      |
| Package weight(Lbs)   | 13.19 oz (374 g)       |
| Returnability         | Yes                    |
| Country of origin     | CZ                     |

## Packing Units

|                              |                        |
|------------------------------|------------------------|
| Unit Type of Package 1       | PCE                    |
| Package 1 Height             | 1.57 in (4 cm)         |
| Package 1 width              | 7.09 in (18 cm)        |
| Package 1 Length             | 7.09 in (18 cm)        |
| Unit Type of Package 2       | S02                    |
| Number of Units in Package 2 | 10                     |
| Package 2 Weight             | 8.57 lb(US) (3.888 kg) |
| Package 2 Height             | 5.91 in (15 cm)        |
| Package 2 width              | 11.81 in (30 cm)       |
| Package 2 Length             | 15.75 in (40 cm)       |


## Offer Sustainability

|                            |   |
|----------------------------|---|
| California proposition 65  | WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| REACH Regulation           | <a href="#">REACH Declaration</a>   |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>  |
| Mercury free               | Yes   |
| RoHS exemption information | <a href="#">Yes</a>   |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

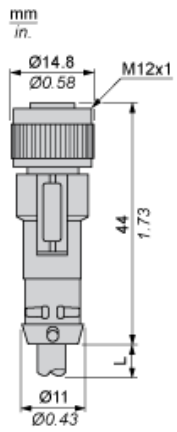


L : Length of cable

---

Connections and Schemes

---

Connectors



BU : Blue  
BN : Brown  
BK : Black  
GY : Grey  
BK/ Black / White  
WH :