



.XX


±0.13 .XXX ±0.10



ISSUE NUMBER **ORIGINAL** 





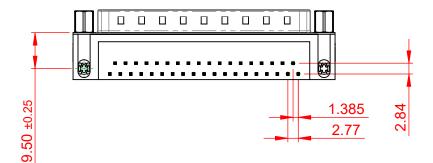

## NOTES:

MATERIAL:

THERMOPLASTIC POLYESTER, UL94V-0 **HOUSING:** 

SHELL: STEEL, NICKEL PLATED

CONTACT: COPPER ALLOY, 30µ GOLD PLATING

OPERATING TEMPERATURE: -55°C TO +85°C

**CURRENT RATING:** 3A PER CONTACT

**CONTACT RESISTANCE:** 25mΩ MAX. **INSULATOR RESISTANCE:** 5000MΩ min.

**DIELECTRIC** 

WITHSTANDING VOLTAGE: 1000V AC rms

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



621 SERIES D-SUB CONNECTOR

EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

SCALE: 1:1		SHEET	1	OF	1	
CHECKED:		DATE:				
DRAWN: C.B		DATE:	AUG	. 01/20	018	
SW REFERENCE NO.:	621 AS	ASSEMBLY				

DRAWING NUMBER: 621-037-668-056 ISSUE PART NUMBER: 621-037-668-056