



touch screen



USB 2.0



AUDIO



HDMI

VGA DVI

## SUNLIGHT READABLE 7" MONITOR




**XENARC**  
TECHNOLOGIES



- ▶ 5 Wire Resistive and PCAP Touchscreen option - USB
- ▶ 16x9 Widescreen aspect ratio
- ▶ VGA, HDMI, DVI, and AV Inputs
- ▶ LED Backlight, Ambient Light Sensor
- ▶ Vertical and Horizontal image flip
- ▶ Front buttons disabling capability
- ▶ Chip Monolithic Ceramic Capacitors for improved durability
- ▶ High Performance image and video processor
- ▶ AV2 Auto Switching upon signal detection
- ▶ VESA 50mm mounting holes
- ▶ 26 Pin heavy-duty connector with connector locking
- ▶ Brightness - 1000 cd/m<sup>2</sup>
- ▶ Anti Reflective and Anti Fingerprint Coating
- ▶ Optional Touchscreen Optical Bonding for enhanced viewing clarity

Physical Resolution: 1024x600  
Supported Resolution: 640x480 – 1920x1080  
Brightness: 1000 cd/m<sup>2</sup>  
Contrast Ratio: 700:1  
Viewing Angle: 150° Horizontal, 145° Vertical

Operating Voltage: DC 10V ~ 35V  
Power Consumption: <10W  
Operating Temp: -4°F ~ 158°F  
Storage Temp: -22°F ~ 176°F  
Weight: 1.54lbs  
24 Month Warranty  
All measurements are in [ mm ]

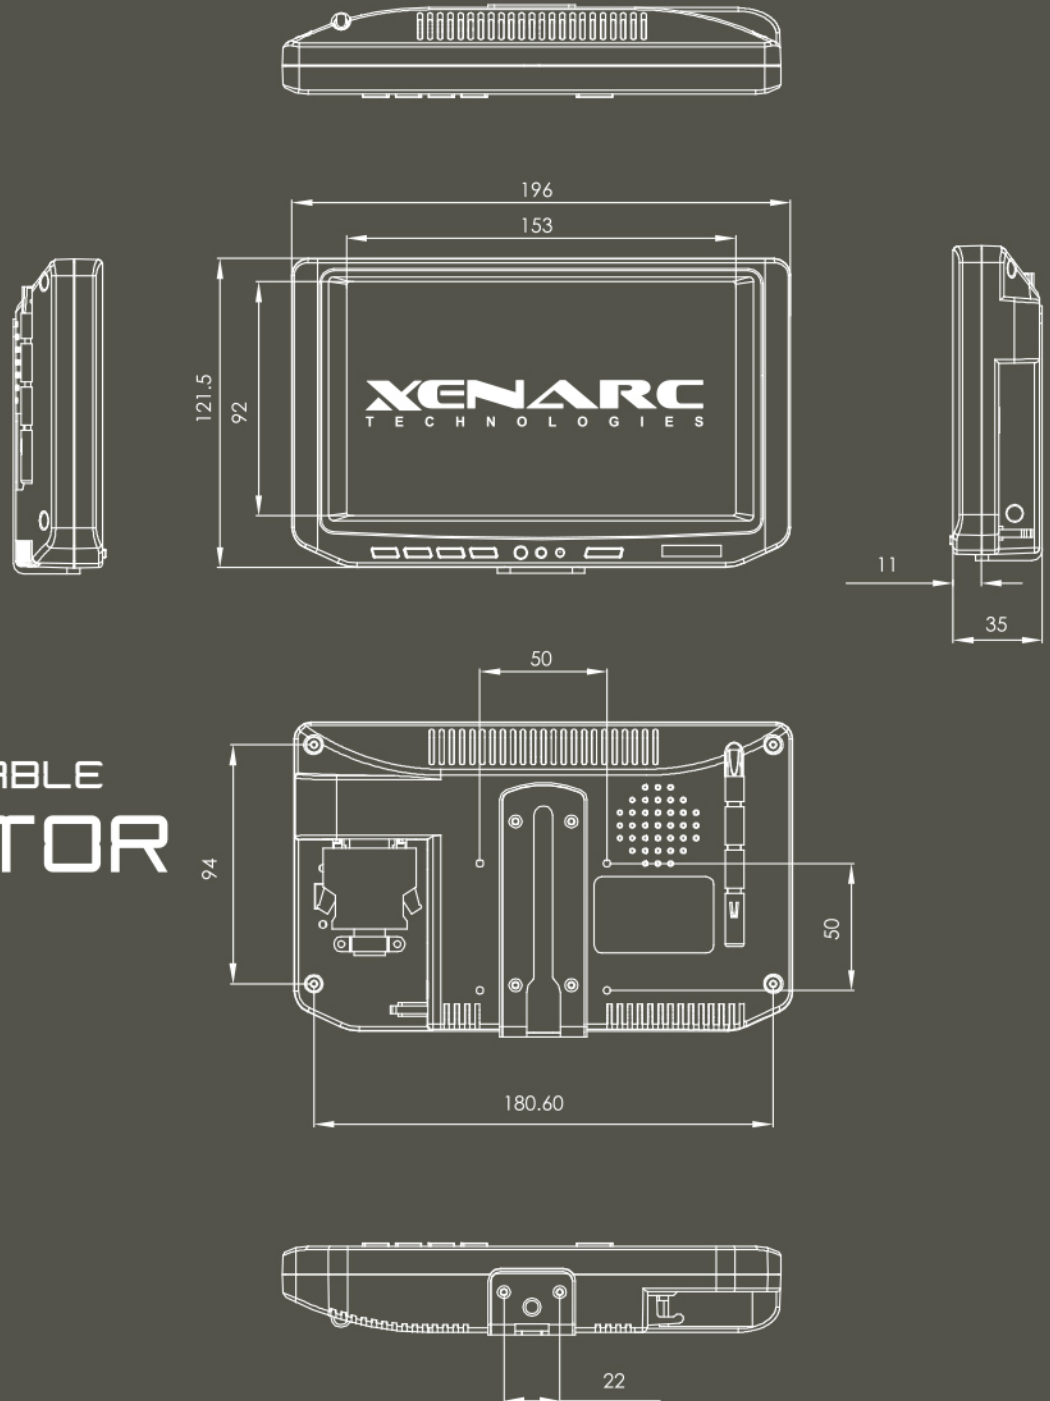

SUNLIGHT READABLE  
**7" MONITOR**

### CERTIFICATIONS



**RoHS**



TEL: 949.380.8898 FAX: 949.380.0888  
EMAIL: SALES@XENARC.COM