

<u> </u>					
<b>_</b>	<u>ری</u>	11	111	0	0



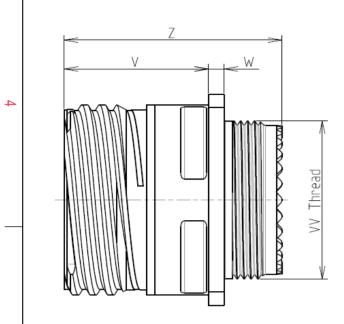

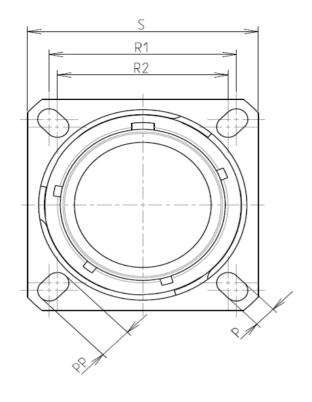

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 17

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Black Zinc Nickel				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: -65°C to +175°C				
-Salt Spray	: 500 hours				

: 35.93 g ± 10%

8D 0

G

17

Ζ

08

S

F

А

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	26.97		
R2	24.61		
S	33.3±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M25x1-6g		


**ORIENTATION : A** 

CONTACT LAYOUT : 17-08

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

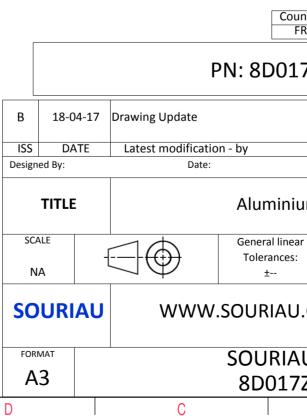

	σ		A		
		I I			
	-				
		0			4
	6/4	2000			
		1			
		1			
S EXA	AMPLE				3
s whic	non-conformit h does not co	mply with			
	r of the Parties or by a third party dation, technical notice.)				
			vollist		
untry FR	Jurisc	liction & Cont Not Listed			2
77	Z08SA				
					-
		CUSTOME	R DRAWING	MOD N°	
					-
um	n Receptacle 8D series				
ar	NPRDS / PROJECT				
			59		1
1.00	.COM				
			t not be reproduce icated without per		
	DRG N°			SHEET	1
'Z0	8SA-C	I		1/2	J
	В		А		

		۵	гт –	m		0	
		Contact Layout					Panel Cutor
4	-x (	$ \begin{array}{c}                                     $			τ <u>ε</u>	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
_	Conta position A B C C D	Contacts (insert arrangement 17-8)           ct 1DD         Location X-axis (mm)         Y-axis (mm)           +.000 (0.00)         +.236 (5.99)           +.128 (3.25)         +.086 (2.18)           +.230 (5.84)        078 (1.98)           +.094 (2.39)        216 (5.49)				Max. thickness panel for receptacle: Ty	_Ø⊺ ype 0: front mot
ω	size no. cor	094 (2.39)        216 (5.49)          230 (5.84)        078 (1.96)          128 (3.25)         +.066 (2.18)           +.000 (0.00)        052 (1.32)           nber of of size contacts rating location         Supersedes           8         16         II         All         MS20053-8				Dim ØA ØAA R1 ØT	A
						SOURIAU shall not be li due to a use of the F the Specifications issued (professional rec	Products wi by either o
N						PN: {	Countr FR 8D017
_					B 18-04-1 ISS DATE Designed By:	7 Drawing Update Latest modification - by Date:	
-					TITLE SCALE NA	Gen	uminiun neral linear olerances: ±
					SOURIA		JRIAU.C URIAU
					A3	80	D017Z
	Н	G	F	E	D	C	

