
т	۵	н <b>т</b>	m	0





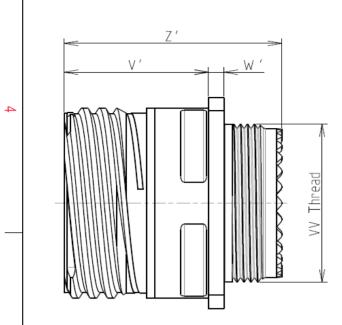

LAYOUT SHOWN AS

Keying Shown as example

F

## CHARACTERISTICS

SHELL SIZE : 21

PLATING : M = Nickel

Н

ω

-Standard : Based on MIL-DTL-38999 Series III

	 -Shell Material	: Composite	
		рр	
	-Shell Plating	: Nickel R1	
	-Insulator	: Thermoplastic R2	
	-Contacts	: Copper Alloy	$\rightarrow$
	-Seals & Grommet	: Silicon Elastomer W'	+
N	-Contact Plating	: Gold over copper Alloy 0.8µm minimum Z'	
	-Durability	: 500 Mating cycles VV THREAD	)
	-Delivered with Souria	u contacts and Accessories	
	-Temperature Range	65°C to +200°C	
	-Salt Spray	: 2000 hours	
_	-Mass	: 37.7 g ± 10%	
	BASIC SERIES:	8D 0 - 21 M 48 P E	
_	SHELL TYPE : Square I	Flange Receptacle	
	CONTACT TYPE : Sta	ndard Crimp Contact	

G

Dim P PP R1 R2	Nominal   3.25±0.2   4.93±0.2   31.75
PP R1	4.93±0.2
R1	
	31.75
R2	
	29.36
S	39.7±0.3
V'	18.7+1.4/-0
W'	2.1/4.35
Ζ'	32 Max
VV THREAD	M31x1-6g
VV THREAD	MI31X1-6g


ORIENTATION : E

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 21-48

SOURIAU shall not be liable for a due to a use of the Products w the Specifications issued by either (professional recommend

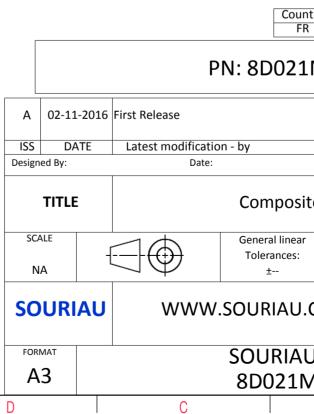

σ		Þ		_	
				4	
AS EXAMPLE				3	
any non-conforming which does not co er of the Parties or I adation, technical n untry Jurisc FR	mply with by a third part			2	
1M48PE					
			MOD N°		
site Receptac		E DRAWING			
ar i	NPRDS / PROJECT 859				
J.COM	This document is the property of				
U DRG N° M48PE-C			SHEET 1/2		
B		A		J	

	т	G	<del>ات</del>	m	D		0	
		Contact Layout						Panel Cut
		48				SQI	UARE FLANGE RECEPTACLE (TYP REAR MOUNTING R1	<sup>2</sup> E O)
4						α		→
	· · · · · · · · · · · · · · · · · · ·	4#8 Power 21-48				v		Ł
	Ctc A	X Y 4.57 4.57						_X øa
	B C	4.57 -4.57 -4.57 -4.57						Dim
ယ	D	-4.57 4.57						ØA ØAA R1
								ØT
	F						SOURIAU shall not due to a use of the Specifications iss (profession)	the Products v
N								Cour
							PN	l: 8D021
					A		First Release	
					ISS Design	DATE ed By:	Latest modification - Date:	by
						TITLE		Composi
<b>_</b>					SC.	ALE -		General linear Tolerances: ±
					SC	URIAU	www.s	OURIAU

F

Е

G

Н

FORMAT

A3

D

С

