
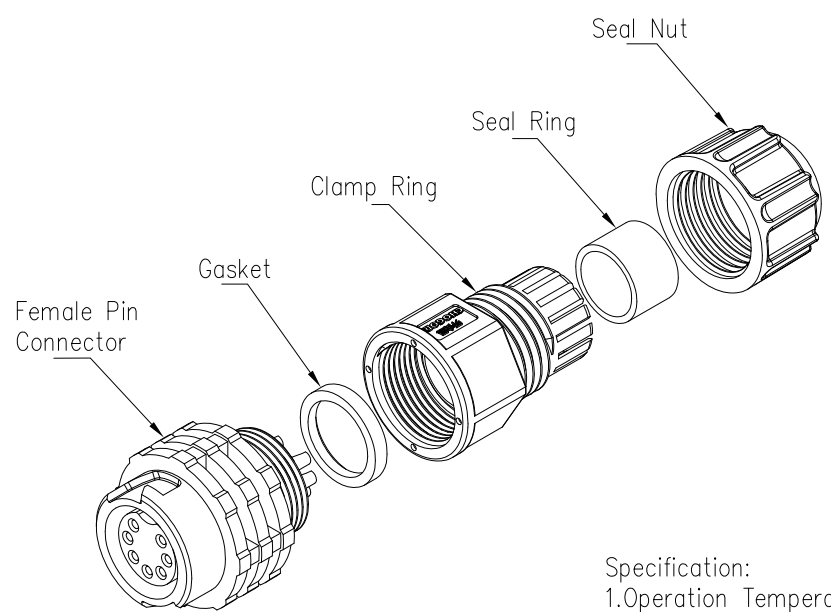

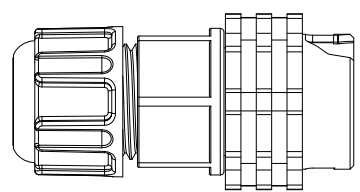


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.


REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Hary	2020/05/14

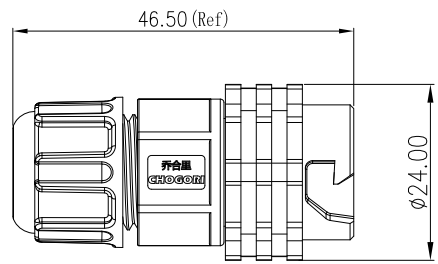

23XXX431-XX Cable Range OD  
 01 OD: φ3.5mm~φ6.5mm  
 02 OD: φ6.5mm~φ9.5mm

Pin Number

- Specification:
- 1.Operation Temperature: -45°C~105°C.
  - 2.Insulation Resistance:100MΩ at DC500V.
  - 3.Contact Resistance:<10mΩ.
  - 4.Withstand Voltage: 2000V AC
  - 5.Operating Current:5A
  - 6.Operating Voltage: AC 60V
  - 7.Waterproof Rate:IP67 (Mated)
  - 8.Seal Nut:Nylon, Black
  - 9.Seal Ring:Silicon, Black.
  - 10.Clamp Ring:Nylon, Black
  - 11.Gasket:Silicon, Red
  - 12.Female Pin:Copper Alloy, Gold Plated
  - 13.Connector:Nylon+GF, Black
  - 14.RoHS Compliant.
  - 15.UL Compliant.
  - 16.Mating Cap:806-00076-00

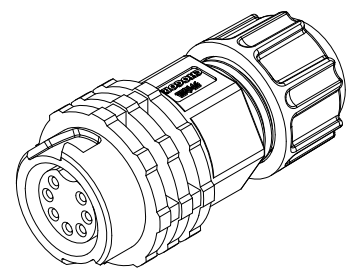

7 Pin	8 Pin	9 Pin
P/N: 23007431-XX	P/N: 23008431-XX	P/N: 23009431-XX
Pin Assignments Front View		

UNIT:mm		DESCRIPTION Middle Series Push Lock Female Plug With Female Pin	<b>CHOGORI</b> <sup>®</sup>	PART NO 23XXX431-XX	DRAWN BY Hary	DATE 2020/05/14
TOLERANCE .X ±0.25 .XX ±0.15 .XXX ±0.05 ANGLES ±1°	SCALE: 1:1	SHEET 1 OF 1		DWG NO	CHECKED BY Mo	DATE 2020/05/14
REV. C1	SIZE A4	* :Inspection Item		CUSTOMER	APPROVED BY Panson	DATE 2020/05/14