
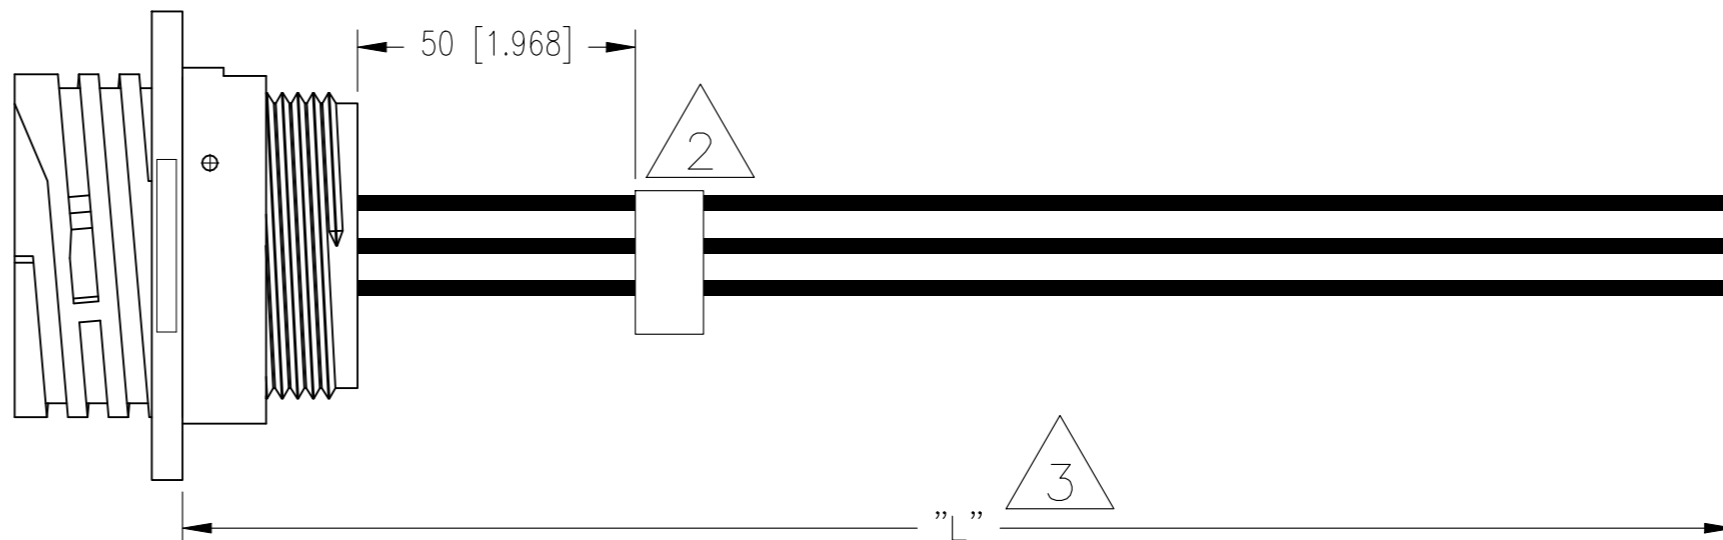


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	INITIAL RELEASE	09NOV2021	GSK	JDA

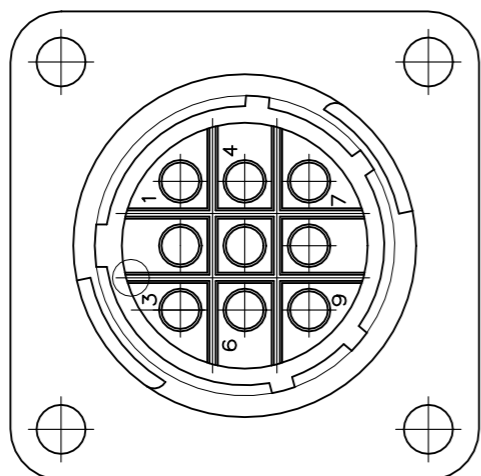

NOTES:

1. OVERALL INSULATION CRIMP DIAMETER, INCLUDING CRIMP BARREL, MUST NOT EXCEED .125 [3.18]

2 LABEL LOCATED APPROXIMATELY WHERE SHOWN. LABEL INFORMATION AS FOLLOWS:

2387123-X	TE P/N
REV B	CUST REV
TE/MEXICO	MANUFACTURER NAME/COUNTRY OF ORIGIN
MM/DD/YY	DATE CODE

4. TOLERANCES PER IPC STANDARD:
IPC-A-620A

Metric	
<0.3 m	+25mm -0mm
>0.3 m - 1.5m	+50mm -0mm
>1.5 m - 3m	+100mm -0mm
>3 m - 7.5m	+150mm -0mm
>7.5m	+5% -0%

5. HARNESS SHALL BE SHIPPED IN SEALED PLASTIC BAG.

6. CONTINUITY ELECTRICAL TEST MUST BE PERFORMED.

7. WIRE 18 AWG

3 "L" REPRESENTS THE LENGTH OF THE WIRE USED FOR THE LEADS.

TE PN	LENGTH "L"
2387123-1	0.5M
2387123-2	1.0M
2387123-3	2.0M

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 11FEB2021 SATHISH KUMAR G		TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK 11FEB2021 JUAN AVILA			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 11FEB2021 JUAN AVILA		NAME CPC SQ. FLANGE RCPT CONNECTOR CABLE, REV SEX, SPECIAL VDE, SERIES 1, 13-9	
		PRODUCT SPEC		APPLICATION SPEC	
MATERIAL		FINISH		SIZE	RESTRICTED TO
-		-		A3	00779
				DRAWING NO C-2387123	
				SCALE NTS	
				SHEET 1 OF 1	
				REV B	
CUSTOMER DRAWING					