


## T497E106K010CH612A

T497 Space, Tantalum, MnO2 Tantalum, Space, 10 uF, 10%, 10 VDC, SMD, MnO2, Molded, Aerospace, Medical, C (0.01%/1000 Hrs), 3.5 Ohms, 5125, Height Max = 1.65mm

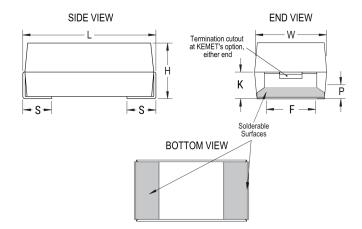

General Information		
Series	T497 Space	
Dielectric	MnO2 Tantalum	
Style	SMD Chip	
Description	SMD, MnO2, Molded, Aerospace, Medical	
Features	Aerospace, Medical	
RoHS	No	
Prop 65	WARNING: Cancer and reproductive harm - http://www.p65warnings.ca.gov.	
SCIP Number	1dd2e1b8-26dd-4d52-927c-6f9d519011aa	
Termination	Solder Coated	
AEC-Q200	No	
Component Weight	421.63 mg	
Notes	Note: When solder coated terminations are required, add an additional 0.38mm (0.015inch) to the tolerances for "L", "W", "H", "K", "F" and "S".	

Click here for the 3D model.

Dimensions	
Footprint	5125
L	5.08mm +/-0.38mm
W	2.54mm +/-0.38mm
Н	1.27mm +/-0.38mm
S	0.76mm +0.25/-0.13mm
F	2.41mm +0.13/-0.25mm
К	0.76mm MIN
Р	0.38mm MIN

Packaging Specifications		
Packaging	T&R, 178mm	
Packaging Quantity	2500	

Specifications		
Capacitance	10 uF	
Capacitance Tolerance	10%	
Voltage DC	10 VDC (85C), 6.7 VDC (125C)	
Temperature Range	-55/+125°C	
Rated Temperature	85°C	
Dissipation Factor	6% 120Hz 25C	
Failure Rate	C (0.01%/1000 Hrs)	
Resistance	3.5 Ohms (100kHz 25C)	
Ripple Current	447 mA (rms, 100kHz 25C)	
Leakage Current	1 uA (5min 25°C)	
Testing and Reliability	Standard Testing Only	

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.