

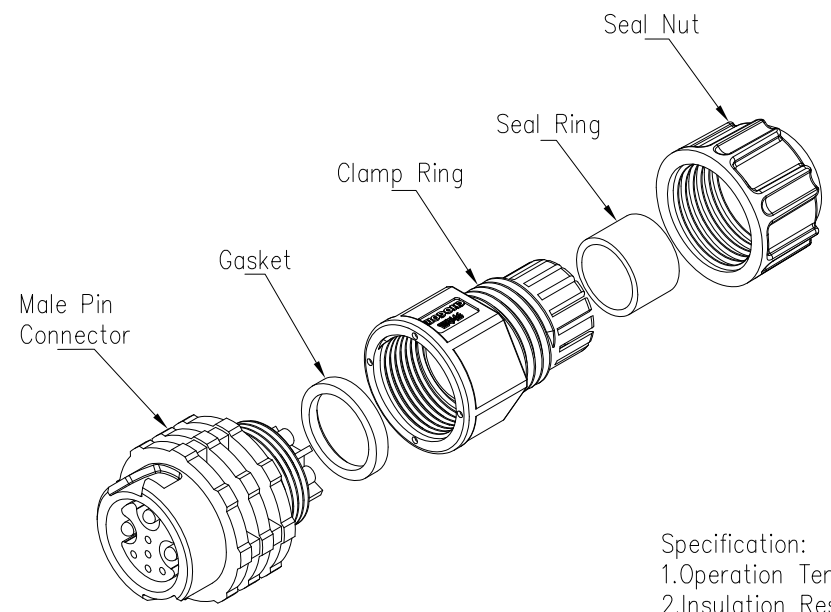

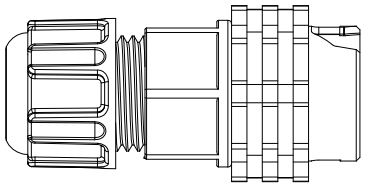



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.

REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Hary	2020/05/23

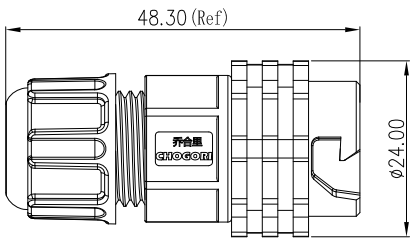

23004331-XX Cable Range OD  
 01 OD: φ3.5mm~φ6.5mm  
 02 OD: φ6.5mm~φ9.5mm

- Specification:
- 1.Operation Temperature: -45°C~105°C.
  - 2.Insulation Resistance: 100MΩ at DC500V.
  - 3.Contact Resistance: <10mΩ.
  - 4.Withstand Voltage: 1500V AC
  - 5.Operating Current: 15A/2A
  - 6.Operating Voltage: AC 125V/30V
  - 7.Waterproof Rate: IP67 (Mated)
  - 8.Seal Nut: Nylon, Black
  - 9.Seal Ring: Silicon, Black.
  - 10.Clamp Ring: Nylon, Black
  - 11.Gasket: Silicon, Red
  - 12.Male Pin: Copper Alloy, Gold Plated
  - 13.Connector: Nylon+GF, Black
  - 14.RoHS Compliant.
  - 15.UL Compliant.
  - 16.Mating Cap: 806-00076-00



(3+5) Pin

P/N: 23305331-XX

Pin Assignments Front View

UNIT: mm	
TOLERANCE	
.X	±0.25
.XX	±0.15
.XXX	±0.05
ANGLES	±1°

DESCRIPTION		Middle Series Push Lock Female Plug With Male Pin	
SCALE:	1:1	SHEET	1 OF 1
REV.	C1	SIZE	A4
* : Inspection Item			



PART NO	23305331-XX	DRAWN BY	Hary	DATE	2020/05/23
DWG NO		CHECKED BY	Mo	DATE	2020/05/23
CUSTOMER		APPROVED BY	Panson	DATE	2020/05/23