
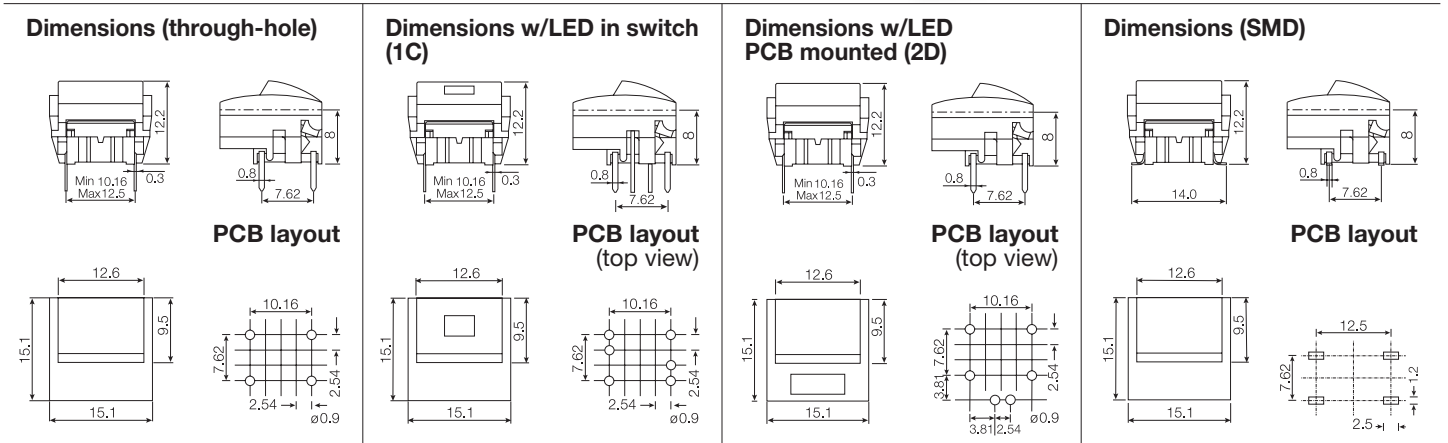


Technical Data

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:
 - low temp: -40/+115°C
 - high temp: -40/+160°C

Keycaps and bezels shown on this page can also be used on **illumec™ switch 4A**.

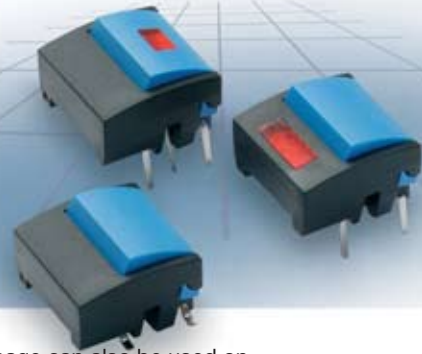

How to order

3 A	<input type="checkbox"/>	<input type="checkbox"/>	+	1 B	<input type="checkbox"/>	+	2 C	<input type="checkbox"/>	For 1B and 2A only:	
Switch	Mounting	L 6 low temp.		Cap	00 blue		Bezel	00 blue	30 ultra blue	50 metal dark blue
	T through-hole	H 9 high temp.			02 green			02 green	40 dusty blue	53 metal light grey
	S surface mount				03 grey			03 grey	42 aqua blue	57 metal dark grey
					04 yellow			04 yellow	32 mint green	58 metal bordeaux
					06 white			06 white	33 tele grey	
					08 red			08 red	34 melon	
					09 black			09 black	38 noble red	

3 A	T	<input type="checkbox"/>	+	1 C	<input type="checkbox"/>	+	<input type="checkbox"/>	+	2 C	<input type="checkbox"/>
Switch	Mounting	L 6 low temp.		LED	00 blue		Lens		Bezel	00 blue
	T through-hole	H 9 high temp.		00 blue	02 green		1 transparent			02 green
				20 green	03 grey		2 green			03 grey
				40 yellow	04 yellow		4 yellow			04 yellow
				80 red	06 white		8 red			06 white
					08 red					08 red
					09 black					09 black

3 A	<input type="checkbox"/>	<input type="checkbox"/>	+	1 B	<input type="checkbox"/>	+	2 D	<input type="checkbox"/>	<input type="checkbox"/>
Switch	Mounting	L 6 low temp.		Cap	00 blue		Bezel	00 blue	Lens
	T through-hole	H 9 high temp.			02 green			02 green	1 transparent
	S surface mount				03 grey			03 grey	2 green
					04 yellow			04 yellow	4 yellow
					06 white			06 white	6 frosted white
					08 red			08 red	8 red
					09 black			09 black	
							+	2 B X X X	
								LED for 2D bezel	20 green
									40 yellow
									80 red

Ordering example: 3ATL640 + 1C094 + 2C04

For updates of products and/or changes of specifications please see www.mec.dk