




THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER

ORIGINAL


(1)



NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ GOLD PLATED

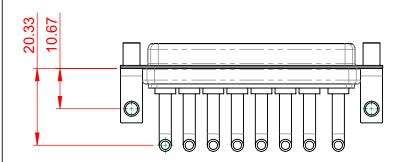

OPERATING TEMPERATURE:

POWER/CO-AX CONTACT RATING: 30A (CURRENT) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT

SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.


INSULATOR RESISTANCE: DIELECTRIC

WITHSTANDING VOLTAGE:

5000MΩ min.

-55°C ~ 125°C

1000V AC rms



ſ	COMBINATION D-SUB			SW REFERENCE NO.: 630 COMBO ASSEMBLY		
				DRAWN: C.B	DATE: JAN. 01/20	19
				CHECKED:	DATE:	
EDA		EDAC INC TORONTO, ONTARIO CANADA TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
				DRAWING NUMBER: 630-8W8-650-3TE		ISSUE
	YOUR CONNECTION TO			PART NUMBER: 630-8W	3-650-3TE	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

