

Ratings

Voltage: 300 V
 Temperature: -40~105 °C
 Flammability: VW-1

Conductor

Conductor count: 6
 Gauge: 22 AWG 0.33 mm²
 Material: tinned copper strands
 Strand size: Ø 0.127 mm x 26
 Resistance at 20 °C: 59.4 Ω /km max

Insulator

Material: FEP
 Color: red, black, white, yellow, blue, green
 Diameter: Ø 1.08 ±0.10
 Nominal thickness: 0.13 mm
 Resistance at 20 °C: 10 MΩ /km min

Filler

Material: aramid fiber



Shield

Material: tinned copper strands
 Strand size: Ø 0.08 mm, 85% min coverage

Outer jacket

Material: TPE, 78A
 Color: black, matte
 Diameter: Ø 4.9 ±0.25
 Nominal thickness: 0.6 mm

Wire marking: E339579 UL AWM STYLE 21296 22 AWG 105°C
 300V VW-1 --- cUL AWM I A 105°C 300V FT1 TENSILITY DGT

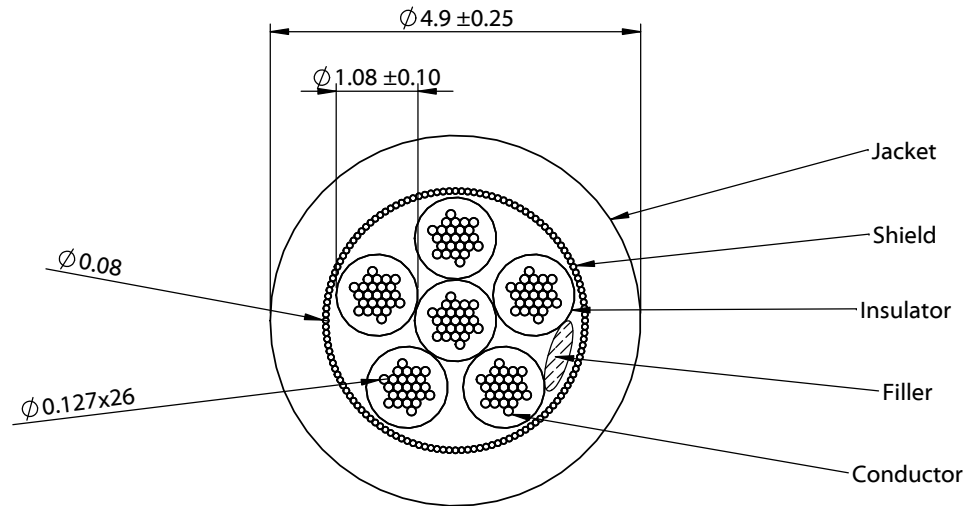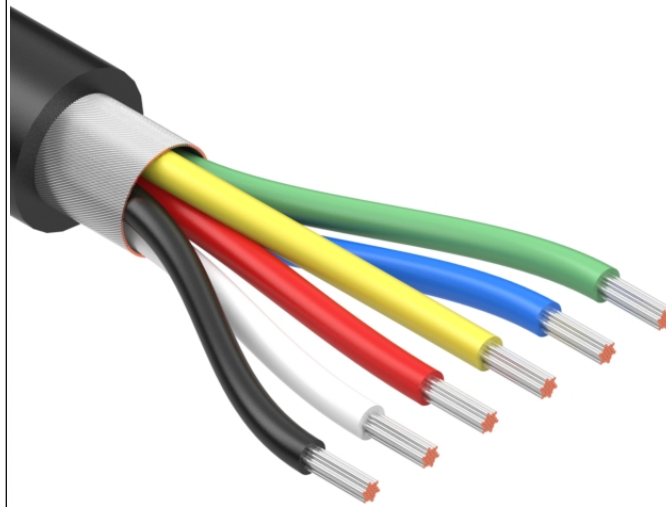

Revision:	Date:	Description:	Prepared:	Notes: RoHS compliant Phthalate free Function test: no open, no short circuit, no intermittent	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>	
A	10/26/2021	Initial release	Verified:			
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description:	Size: Part number:	
				Wire, 6C TS, 22 AWG, UL 21296, 300V, 105C, 4.9 mm, shielded, VW-1, TPE	A 30-02444	
				Scale: 10:1		Sheet 1 of 1

5

4

3

2

1