


19.636 MAX
HOLE TO HOLE
18.312
17.812
INSIDE RAIL

.390 MIN
DOOR CLEARANCE



35.638 MAX
RAIL TO RAIL

1.710 MIN
DOOR CLEARANCE

- NOTE:
 1. 19" EIA RACK MOUNT COMPLIANT.
 2. RAILS ACCEPT 3/8" CAGENUT.
 3. BLACK POWDER COAT.

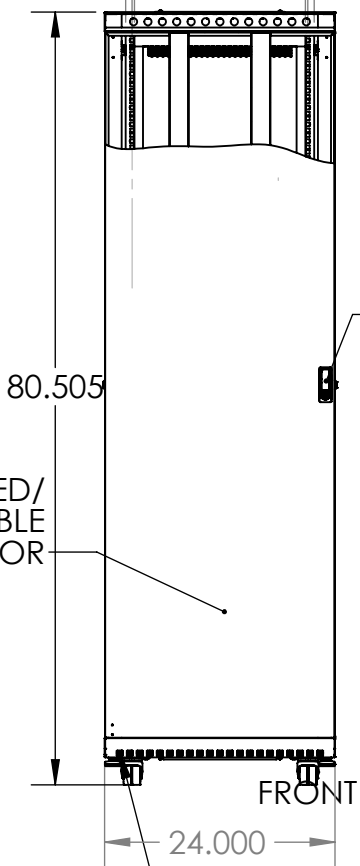

KEYED LOCK
 FRONT, SIDES
 AND REAR

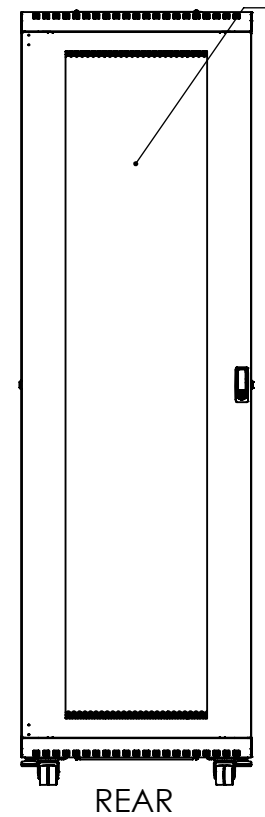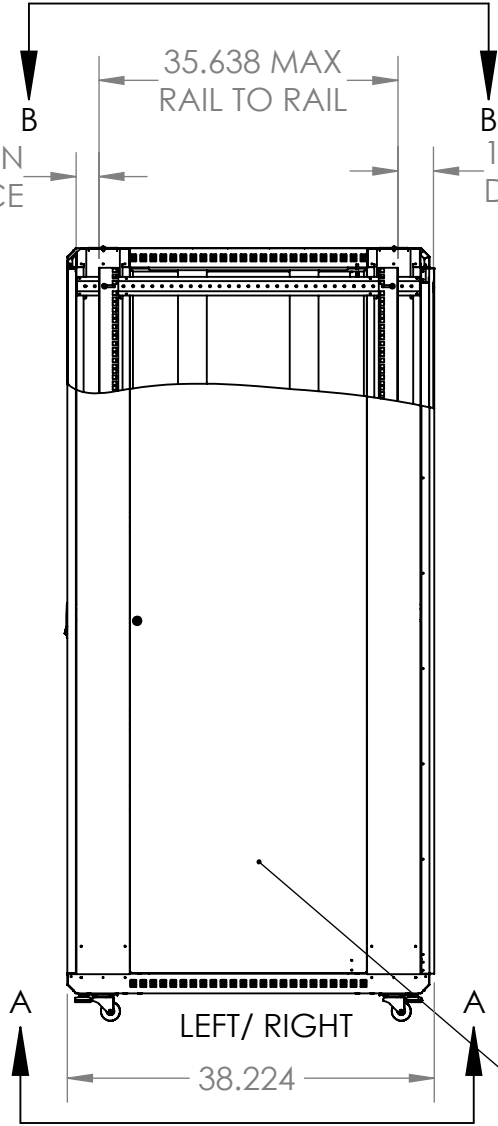

VENTING FRONT,
 SIDES AND REAR,
 TOP AND BOTTOM

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS
 DRAWING IS THE SOLE PROPERTY OF
 KENDALL HOWARD. ANY REPRODUCTION
 IN PART OR AS A WHOLE WITHOUT THE
 WRITTEN PERMISSION OF KENDALL HOWARD
 IS STRICTLY PROHIBITED.

WEB PRINT	
NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± 1/8 ANGULAR: BEND ± 1 DEGREE TWO PLACE DECIMAL ± .03 THREE PLACE DECIMAL ± .01 Surface Area	NAME	DATE
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

DRAWN		
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		
COMMENTS:		

KENDALL HOWARD

TITLE:
**42U LINIER FS SOLID
 FRONT/ CONVEX REAR**

SIZE DWG. NO. REV
A 3104-3-001-42 WP

SCALE: 1:20 WEIGHT: 177.00 SHEET 1 OF 2

