
TOLERANCE UNLESS OTHERWISE SPECIFICATION OF MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER

(1)

ORIGINAL

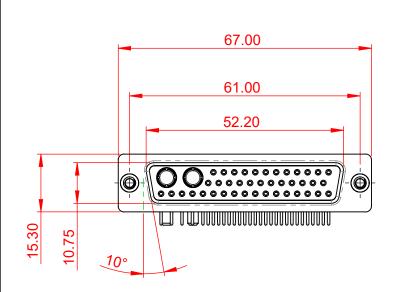



NOTES:

.X ±0.25 .XX ±0.13

.XXX ±0.05


MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, TIN PLATED CONTACT: COPPER ALLOY, GOLD FLASH PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C

 $\label{eq:signal_contact_current rating: 5A per contact} \\ \mbox{Signal_contact resistance: 10m} Ω MAX. \\ \mbox{Insulator resistance: 5000M} Ω min. \\ \mbox{Dielectric} \\ \mbox{Withstanding voltage: 1000V AC rms} \\ \mbox{Ac rms} \\ \mbox{Insulator resistance: 5000V AC rms} \\ \mbox{$


CONTACT CODE 40 POWER CONTACT FOOTPRINT - 13.20mm 40 IS STANDARD AS SHOWN ON SHEETS 3 & 4 CONTACT CODE 50 POWER CONTACT FOOTPRINT - 20.33mm

		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/2019	
			CHECKED:	DATE:	
CANADA	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4	
		SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-43W2250-2T2		ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-43W	2250-2T2	1





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. 4V-0

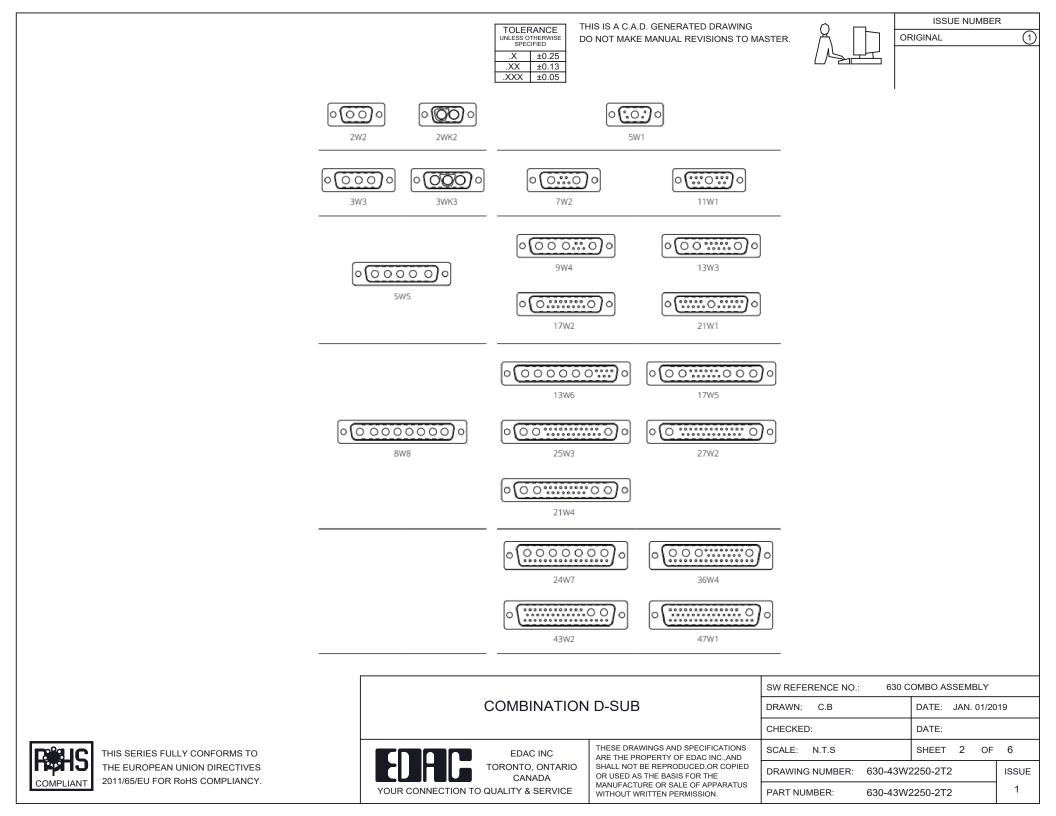



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

 $\overline{(1)}$

2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female

11W1 Male/Female





5W5 Male



PCB EDGE

8W8 Male



PCB EDGE



PCB EDGE




27W2 Male/Female


21W4 Male/Female


PCB EDGE


5W5 Female



8W8 Female








21W1 Male/Female




	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:		
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: N.T.S	SHEET 3 OF	4	
S Y.		SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-43W2250-2T2		ISSUE	
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630	-43W2250-2T2	1	

CURRENT RATING / ØA 10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2





17W2 Male/Female



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY COMPLIANT

TOLERANCE UNLESS OTHERWISE SPECIFIED DAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.















13W3 Male





25W3 Male





2.77


24.77

23.36

PCB EDGE

PCB EDGE

36W4 Female

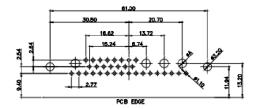

13W6 Male





30.50

2.77

22.16

20.76

13W6 Female

13W3 Female

.X±0.25.XX±0.13.XXX±0.05

43W2 Female





17W5 Male










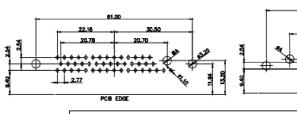

20.7


13.72

PCB EDGE



31.75

21.9



	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:		
THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: N.T.S	SHEET 4 OF	4	
	TORONTO, ONTARIO CANADA		DRAWING NUMBER: 630-43W	2250-2T2	ISSUE	
COMPLIANT 2011/65/EU FOR RoHS COMPLIANCY.	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-43W	2250-2T2	1	