
Mounting Option

.344 (8.74) Offset Card Guides

Contact Detail

PC Tail .023x.013(0.58x0.33) - Tail LG=.213(5.41)

.156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

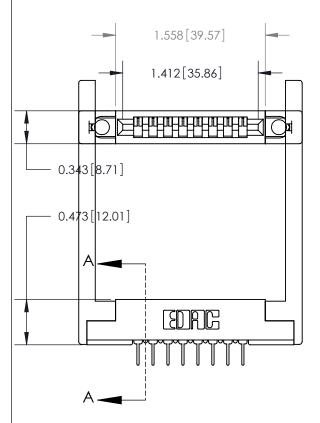

See Accompanying Pages for:

- **Contact Bend Details**
- **Mounting Options**
- **Features and Specifications**



| .175 [4.45] Point of Contact (Measured from bottom of Card Slot) |
|--|
| Card Slot Accepts .054 [1.37] to .070 [1.78] Thick P.C. Board SECTION A-A |

807 Series High Temp Card Edge Connector Part Number: 807-008-531-168



| | DRAWN: J.LEE | DATE: AUG. 11/09 | | |
|----|---------------------|------------------|--------|--|
| | CHECKED: | DATE: | | |
| | SCALE: NTS | SHEET | 1 OF 4 | |
| ED | DRAWING NUMBER | | ISSUE | |
| S | 807 Assembly | | 1 | |

807 ENG MASTER





ISSUE NUMBE

ORIGINAL



Features

- CSA Approved and UL Recognized
- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- Low Profile Insulator Body .473 (12.01), with Card Guides
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree & Extender Board Bends
- Single or Dual Row Configurations
- Large Variety of Mounting Options
- Pre-assembled Card Guides Available
- Accepts Between Contact and In-Contact Polarizing Keys

Specifications

- Insulator Material: DAP
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 5 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +165 °C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

| 807 Series High Temp Card Edge Connector Features and Specifications | | | ACAD REFERENCE NO. 807 ENG MASTER | | | | |
|--|---|---------|-----------------------------------|----------|----------|--|--|
| | | | J.LEE | DATE: AU | G. 11/09 | | |
| reardes and specifications | CHECKED: | | DATE: | | | | |
| EDAC INC | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | SCALE: | NTS | SHEET . | 4 OF 4 | | |
| TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE | | DRAWING | NUMBER | | ISSUE | | |
| | | 8 | 07 Assembly | | 1 | | |