
	۵ E	П	m			C	σ	A		
4	Z'	ØS								4
ယ						LAYOUT S	HOWN AS EXAMPLE			3
		Keying Shown as	example							
	CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III	E	Connector dimensionDimNominalØS38.5 Max							
	-Shell Material: Composite-Shell Plating: Olive drab Cadmium-Insulator: Thermoplastic-Contacts: Copper Alloy	_	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)							
N	-Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum						Country Jurisd	ction & Control List Not Listed]	2
	-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories					PN:	8D519J32JD			
	-Temperature Range : -65°C to +175°C -Salt Spray : 2000 hours					First Release				-
					ISS DATE Designed By:	Latest modification - by Date:		CUSTOMER DRAWING	MOD N°	
						LE Composite Plug 8D series				
<u> </u>	BASIC SERIES: 8D 5 - 19 J SHELL TYPE : Plug with RFI Shielding - 19 J	32 J D			SCALE		neral linear blerances: ±	NPRDS / PROJECT 859		1
	CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 19	TACT TYPE : Standard Crimp Contact ORIENTATION :			SOURIAU WWW.SOURIAU.COM it must not be re		This document is the pro SOURIAU it must not be reprodu	ced or		
	PLATING : J = Olive drab Cadmium		CONTACT TYPE : SOCKET (13		FORMAT	SO	URIAU DRG N°	communicated without pe	SHEET	
			-		A3		D519J32JD-C		1/2	
	H G I	F			D	С	l B	I A		

PLATING	:	J =	Olive drab Cadmium
---------	---	-----	--------------------

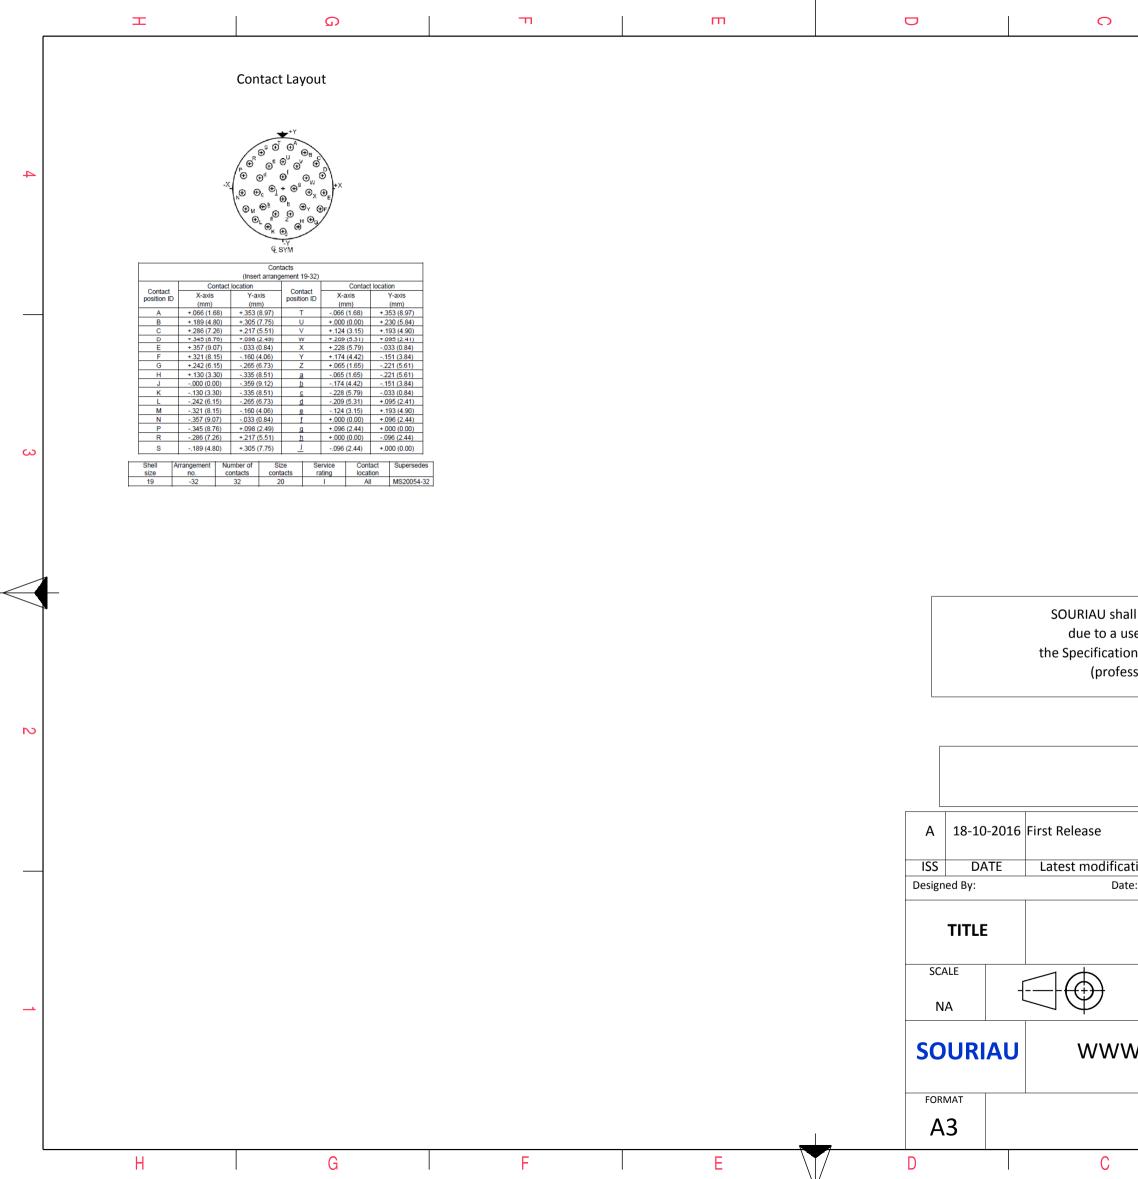

		ω		A		1		
						4		
						-		
						•		
						3		
all not be liable for any non-conformity or damage use of the Products which does not comply with ons issued by either of the Parties or by a third party essional recommendation, technical notice.)								
	Country	Jurisd	iction & Cont	rol List]			
	FR		Not Listed		- 	2		
PN: 81	D519J3	32JD						
]			
ation - by te:			CUSTOME		MOD N°			
Composite Plug 8D series								
	al linear		NPRDS /	PROJECT				
Tolerances: ±			8		1			
			This doc	ument is the prop	perty of	1		
W.SOURIAU.COM it must not be reproduced or communicated without permission								
SOURIAU DRG N° SHEET								
8D519J32JD-C 2/2								
BA								
	-							