
| 49.1 | ±0.5 |
|------|-----------------------|
| | lonariqmA qa.agttA |

| REVISIONS | | | | | | |
|-----------|-----|-----|-----------------|-----------|-------|-------|
| | REV | ECO | DESCRIPTION | DATE | BY | APPR |
| | A1 | - | RELEASE DRAWING | 24/AUG/19 | PETER | TOMMY |

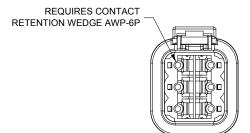

NOTES: UNLESS OTHERWISE SPECIFIED

MATERIAL:

HOUSING: THERMOPLASTIC SEAL: SILICONE RUBBER

2. MODIFICATIONS: END CAP; REDUCED DIAMETER WIRE SEAL


- 3. SPECIFICATIONS:
 - 3.1 CURRENT RATING: 25 AMPS


 - 3.2 OPERATING TEMPERATURE: -55°C TO +125°C
 3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
 3.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.

 - 3.5 MOISTURE RESISTANCE: IP67 (MATED CONDITION)
 - 3.6 MATING CYCLE DURABILITY: 100 CYCLES
 - 3.7 RoHS COMPLIANT
- 4. MATING PART: ATP06-6S* PLUG. (* = MODIFICATIONS AND COLORS)
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

| 6 | CONTACT | SIZE AND | REAR | SEAL | WIR | E RAN | GE |
|---|---------|----------|------|------|-----|-------|----|
| | | | | | | | |


| CONTACT | MIN. INSUL | MAX. INSUL | TYPICAL |
|-----------|----------------------|----------------------|-------------|
| SIZE O.D. | | O.D. | WIRE RANGE |
| 12 | 2.46 mm (.097 in) | 4.01 mm (.158 in) | 12 - 14 AWG |





| PART NUMBER CHART | | | | | |
|-------------------|-----------------|--|--|--|--|
| COLOR PART NUMBER | | | | | |
| GREY | ATP04-6P-MM01 | | | | |
| BLACK | ATP04-6P-MM01BK | | | | |

STANDARD MOLDED COLOR IS GREY. ADDITIONAL COLOR (BLACK) IS AVAILABLE VIA SPECIAL ORDER.

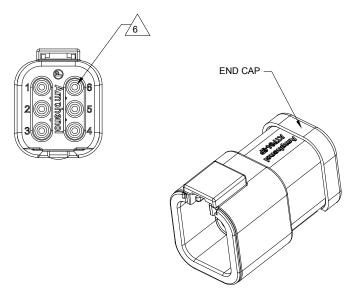

| | SEE PART NUMBER CHART | | | | | | | | |
|--|-----------------------|---|--|-----------------------------------|----------------------------|----------------------------|-----------------|------|--|
| | PART N | PART NUMBER | | | DESCRIPTION | | | ITEM | |
| QUANTITY | QUANTITY MATERI. | | | | | | ST | | |
| UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.30 Fractions ±1/64 | | SIG | NATURES | S DATE | Amphonol | | | | |
| | | DRAWN: | PETER.YANG | 24/AUG/19 | | | mphenol | | |
| 2 PL DEC ±0.15 3 PL DEC ±0.08 | Angles ±1° | CHECKED: | ORION.LI | 24/AUG/19 | 44724 Morley Drive | | | | |
| 3) Note reference | - X | ENGINEER: | | | | | | | |
| MATERIAL SPECIFICA | ATIONS: | APPROVAL: | TOMMY.XIE | 24/AUG/19 | Clinton Township, MI 48036 | | | | |
| THE INDICATE OF THE INDICATE O | | CUSTOMER: | OMER: | | | RECEPTACLE, 6 PIN,END CAP, | | | |
| | | THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY, DESIGN FEATURES. | | REDUCED DIAMETER SEAL, ATP SERIES | | | RIES | | |
| PROCESS SPECIFICATIONS: | | SPECIFICAT SHOWN HER THE AMPHE OF REPROD | PECIFICATIONS AND PERFORMANCE DATA HOWN HEREON ARE THE PROPERTY OF HE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL IMPRISONS APE SUBJECT TO NORMAL | | B | C- | ATP04-6P-MM01XX | A1 | |
| NEXT ASS'Y: | | MANUFACTURING VARIATIONS. | | SCALE: N | ONE | CHEET 1 | ne 1 | | |

TITLE: RECEPTACLE, 6 PIN,END CAP,REDUCED DIAMETER SEAL,ATP SERIES DWG NO: ATP04-6P-MM01XX REV: A1 SH: