



BATTU TUBING

Dual Wall Heat Shrink Tubing

For Battery or Power Cable to Terminal Application

BATTU tubing from TE Connectivity (TE) is a flame-retardant, adhesive-lined tubing made from a polyolefin jacket with a thermoplastic adhesive inner wall. It is specifically designed for power cable to terminal applications in harsh environments, providing excellent electrical isolation, mechanical protection and moisture-resistance. This semi-rigid tubing also offers a degree of strain relief, and it withstands operating temperatures up to 130°C.

BATTU tubing has been optimized in size for fast application to speed production. Additionally, it is provided in convenient cut lengths to help prevent splitting that might result from improper cutting on the plant floor.

KEY BENEFITS:

- Flame-retardant per ISO6722
- Approximate 2:1 shrink ratio, sized for typical power cables (16-120 mm² [6 AWG to 4/0 AWG]) and terminals for fast, efficient assembly
- Moisture-resistant seal
- Withstands common automotive fluids
- Offers mechanical protection for increased product reliability
- Designed for operating temperatures up to 130°C

APPLICATIONS:

- Commercial vehicles
- Industrial vehicles
- Consumer marine
- Recreational vehicles
- Construction/agricultural equipment
- Generator sets
- Military vehicles
- Automobiles

MATERIALS:

- Irradiated polyolefin jacket
- Thermoplastic adhesive inner wall

ELECTRICAL

- Rated 600V with 19,700V/mm dielectric strength to provide excellent electrical insulation

MECHANICAL

- Semi-rigid jacket provides mechanical protection from abrasion and bending
- Adhesive liner bonds to a variety of substrate materials, providing protection from moisture ingress

TEMPERATURE RATING

- Minimum shrink temperature: 110°C [230°F]
- Full recovery temperature: 135°C [275°F]
- Operating temperature: -40°C to 130°C [-40°F to 266°F]


STANDARDS AND SPECIFICATIONS

- Customer drawing: BATTU_TUBING
- Product Specification: TEC-108-120006
- UL file E85381

ORDERING INFORMATION (SEE P. 2 FOR DETAILS)

- Colors: Black, red, orange, and yellow are standard
- Standard packaging: Cut pieces from 32 to 102mm long, as well as sticks that are 1.22m [4ft] long
- Printing: None on standard parts
- Ordering description: Specify product name, size, printing, color and packaging codes. For example, BATTU-12.7/6.1-A1-O-32MM

DIMENSIONS

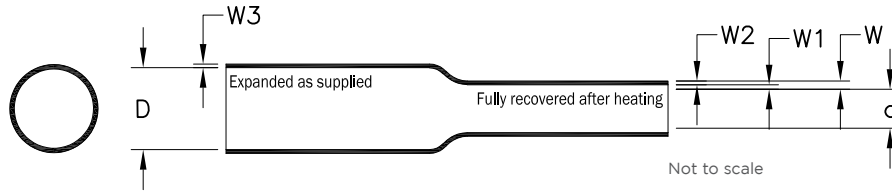

Shrink Ratio	Size	Minimum Expanded I.D. (D)	Expanded Wall Thickness (W3)	Maximum Recovered I.D. (d)	Total Recovered Wall Thickness (W)	Recovered Inner Meltable Wall Thickness (W1)	Recovered Outer Jacket Wall Thickness (W2)
2.08:1	12.7/6.1	12.7 [0.500]	0.56 ± 0.18 [0.022 ± 0.007]	6.10 [0.240]	1.09 ± 0.28 [0.043 ± 0.011]	0.51 ± 0.15 [0.020 ± 0.006]	0.58 ± 0.13 [0.023 ± 0.006]
2.26:1	20.1/8.9	20.07 [0.790]	0.66 ± 0.18 [0.026 ± 0.007]	2.0 [0.079]	1.45 ± 0.30 [0.057 ± 0.012]	0.74 ± 0.15 [0.029 ± 0.006]	0.71 ± 0.15 [0.028 ± 0.006]
2:1	25.4/12.7	25.4 [1.000]	1.02 ± 0.25 [0.040 ± 0.010]	3.0 [0.118]	1.91 ± 0.30 [0.075 ± 0.012]	1.07 ± 0.15 [0.042 ± 0.006]	0.84 ± 0.15 [0.033 ± 0.006]

PRODUCT DESCRIPTION AND ORDERING INFORMATION

Size	Color	Description	Part Number
12.7/6.1	Black	BATTU-12.7/6.1-A1-0-32MM	NB07066001
		BATTU-12.7/6.1-A1-0-51MM	NB07186001
		BATTU-12.7/6.1-A1-0-STK	NB07072001
	Red	BATTU-12.7/6.1-A1-2-32MM	NB07086001
		BATTU-12.7/6.1-A1-2-51MM	NB07196001
		BATTU-12.7/6.1-A1-2-STK	NB07092001
	Orange	BATTU-12.7/6.1-A1-3-32MM	EM63316001
		BATTU-12.7/6.1-A1-3-51MM	EM63326001
		BATTU-12.7/6.1-A1-3-STK	EM63332001
	Yellow	BATTU-12.7/6.1-A1-4-32MM	EM63926001
		BATTU-12.7/6.1-A1-4-51MM	EM63936001
		BATTU-12.7/6.1-A1-4-STK	EM63952001
20.1/8.9	Black	BATTU-20.1/8.9-A1-0-39MM	NB07106001
		BATTU-20.1/8.9-A1-0-51MM	NB07216001
		BATTU-20.1/8.9-A1-0-77MM	NB07206001
		BATTU-20.1/8.9-A1-0-STK	NB07112001
	Red	BATTU-20.1/8.9-A1-2-39MM	NB07126001
		BATTU-20.1/8.9-A1-2-51MM	NB07226001
		BATTU-20.1/8.9-A1-2-64MM	NB07236001
		BATTU-20.1/8.9-A1-2-77MM	NB07246001
	Orange	BATTU-20.1/8.9-A1-2-STK	NB07132001
		BATTU-20.1/8.9-A1-3-39MM	EM63376001
		BATTU-20.1/8.9-A1-3-51MM	EM63386001
		BATTU-20.1/8.9-A1-3-64MM	EM63526001
Yellow	BATTU-20.1/8.9-A1-3-77MM	EM63536001	
	BATTU-20.1/8.9-A1-3-STK	EM63392001	
	BATTU-20.1/8.9-A1-4-39MM	EM63586001	
	BATTU-20.1/8.9-A1-4-51MM	EM63596001	

Size	Color	Description	Part Number	
20.1/8.9 (Cont.)	Yellow	BATTU-20.1/8.9-A1-4-39MM	EM64286001	
		BATTU-20.1/8.9-A1-4-51MM	EM64296001	
		BATTU-20.1/8.9-A1-4-64MM	EM64306001	
		BATTU-20.1/8.9-A1-4-77MM	EM64316001	
		BATTU-20.1/8.9-A1-4-STK	EM64322001	
		25.4/12.7	Black	BATTU-25.4/12.7-A1-0-39MM
BATTU-25.4/12.7-A1-0-51MM	NB07146001			
BATTU-25.4/12.7-A1-0-STK	NB07152001			
Red	BATTU-25.4/12.7-A1-2-51MM		NB07166001	
	BATTU-25.4/12.7-A1-2-77MM		NB07256001	
	BATTU-25.4/12.7-A1-2-102MM		NB07266001	
	BATTU-25.4/12.7-A1-2-STK		NB07172001	
	Orange		BATTU-25.4/12.7-A1-3-51MM	EM63576001
			BATTU-25.4/12.7-A1-3-77MM	EM63586001
BATTU-25.4/12.7-A1-3-102MM			EM63596001	
Yellow	BATTU-25.4/12.7-A1-3-STK		EM63602001	
	BATTU-25.4/12.7-A1-4-51MM		EM64366001	
	BATTU-25.4/12.7-A1-4-77MM	EM64376001		
Black	BATTU-25.4/12.7-A1-4-102MM	EM64386001		
	BATTU-25.4/12.7-A1-4-STK	EM64392001		

BATTU-12.7/6.1-A1-0-STK

- Length: as indicated (STK is 1.22m [4ft])
- Color: 0 = Black, 2 = Red, 3 = Orange, 4 = Yellow
- Printing: A1 = None
- Size: as indicated
- BATTU: Tubing for Power Cable Terminations

PROPERTY REQUIREMENTS

Property	Unit	Requirement	Test Method*
Physical			
Dimensions	mm [in]	As shown in DIMENSIONS table	ASTM D 2671
Longitudinal Change	Percent	0, -10%	ASTM D 2671
Tensile Strength	MPa (psi)	10.3 (1,500) minimum	ASTM D 2671
Ultimate Elongation	Percent	250 minimum	ASTM D 2671
Secant Modulus (Expanded)	MPa (psi)	137 (2.0 x 10 ⁴) minimum	ASTM D 2671
Split Resistance	-	Pass	TEC-108-120006, 4.3.4
Heat Shock 4 hours at 225 ± 3°C (437 ± 5°F)	-	No dripping, flowing or cracking	ASTM D 2671
Short Term Heat Resistance 168 hours at 158 ± 1°C (316.4 ± 1.8°F) followed by test for Ultimate Elongation Tensile strength	Percent MPa (psi)	200 minimum 6.9 (1,000) minimum	ASTM D 2671
Long Term Heat Resistance 3,000 hours at 125 ± 3°C (257 ± 5°F) followed by test for Ultimate Elongation Tensile strength	Percent MPa (psi)	200 minimum 6.9 (1,000) minimum	ASTM D 2671
Color	-	Pass	MIL-STD-104
Peel Strength To Copper To Crosslinked Poly (TAT-125)	N/25mm (Lbf/in)	60 (13.76) minimum 60 (13.76) minimum	TEC-108-120006, 4.3.9
Sleeve Creep	-	Pass	TEC-108-120006, 4.3.7
Flammability	-	Self-extinguishing within 30 s	TEC-108-120006, 4.3.3; ISO 6722-1
Electrical			
Dielectric Strength	Volts/mm (V/mil)	500 (19,700) minimum	ASTM D 2671
Volume Resistivity	ohm-cm	10 ¹² minimum	ASTM D 2671
Fluid Resistance			
Ultimate Elongation	Percent	200 minimum	ASTM D 2671; TEC-108-120006, 4.3.8
Tensile Strength	MPa (psi)	6.9 (100) minimum	ASTM D 2671; TEC-108-120006, 4.3.8
Dielectric Strength	Volts/mm (V/mil)	500 (19,700) minimum	ASTM D 2671; TEC-108-120006, 4.3.8
Swell	Percent	50 maximum	ASTM D 2671; TEC-108-120006, 4.3.8

* Refer to product specification TEC-108-120006 for more complete details concerning test methods and conditions.

BATTU Tubing

Dual Wall, Heat Shrink Tubing

FOR MORE INFORMATION

Visit www.te.com/battutubing

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

For phone numbers in other countries, go to te.com/support-center

te.com

TE Connectivity, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2019 TE Connectivity Ltd. family of companies All Rights Reserved.

1-1773960-9 03/19 Original