

THIS DRAWING IS UNPUBLISHED.



RELEASED FOR PUBLICATION

REVISIONS

© COPYRIGHT - TE Connectivity Ltd.

ALL RIGHTS RESERVED.

P	LTR	DESCRIPTION	DATE	DWN	APVD
	H	ECR-17-017581	04DEC2017	GSK	KN

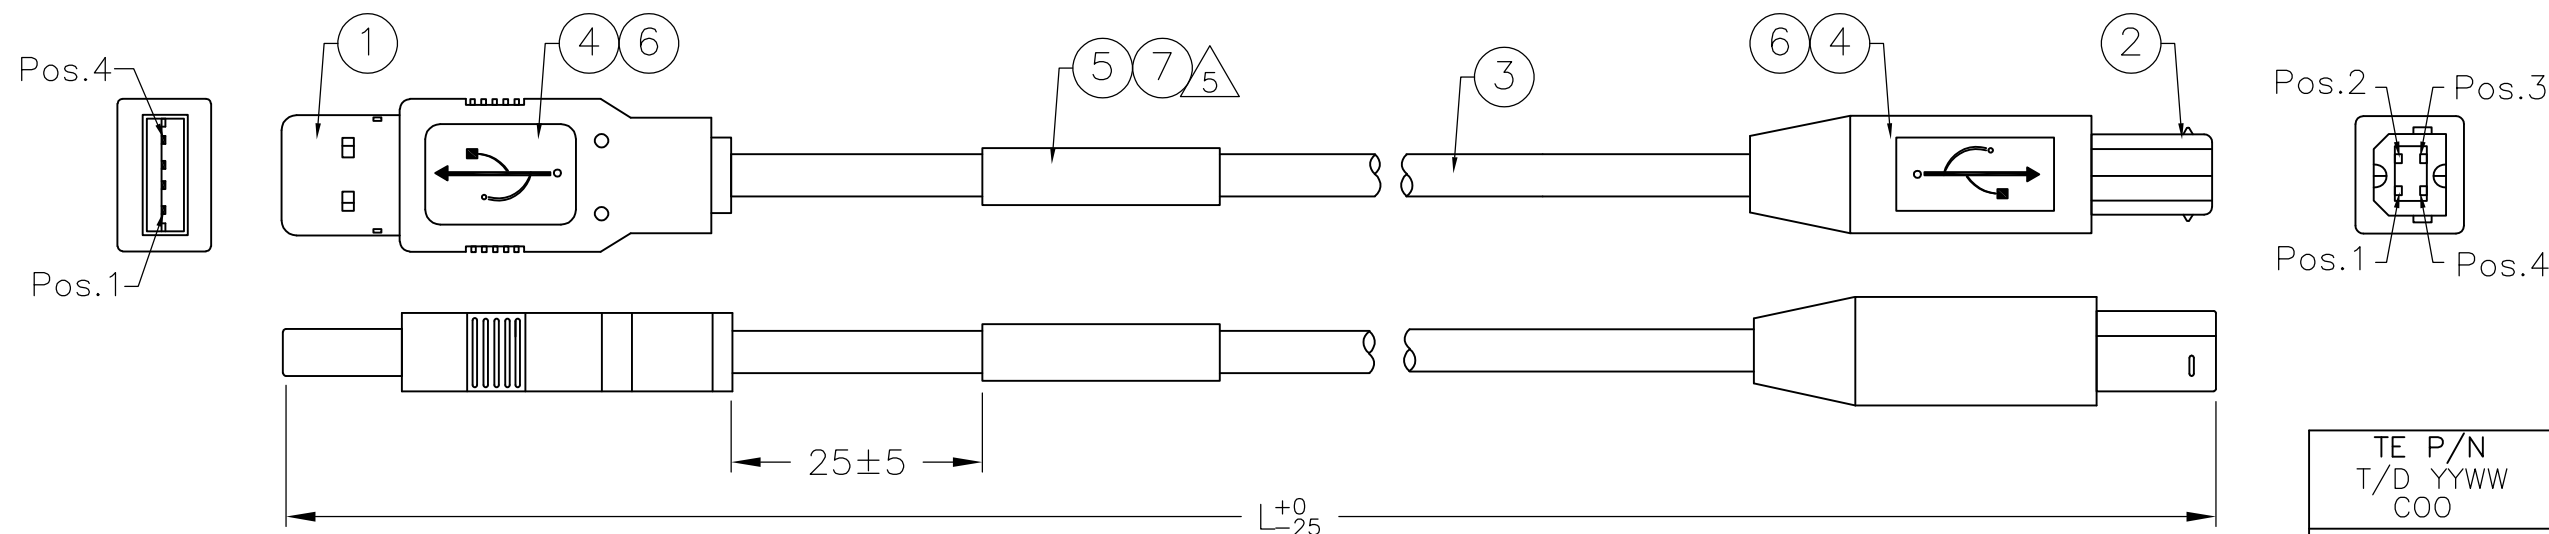

LABEL


NOTES:

- TESTED FOR CONTINUITY, SHORTS AND OPENS, HI-POT 630V FOR 10MS.
  - CABLE ASSEMBLY MEETS USB 2.0 STANDARDS.
  - EXPOSED CABLE BRAID IS NOT PERMISSIBLE BEYOND OVERMOLD.
  - THE FINAL CABLE ASSEMBLY MAXIMUM LENGTH NOT TO EXCEED 1000MM PER USB SPECIFICATIONS.
- △5 TO USE AT MEXICO FACTORY.

PART NO.	1487586-1	1487586-2	1487586-3	1487586-4
LENGTH(L)	500	250	162	310

QTY	1	1	1	1	PC	DESCRIPTION	ITEM
△5	1	1	1	1	PC	SBP LABEL, WHITE, 25.4 X 36.5mm	7
	AR	AR	AR	AR	MR	COPPER FOIL, W: 5MM	6
	1	1	1	1	PC	LABEL 25*35MM, WHITE: 25*13	5
	AR	AR	AR	AR	KG	Overmold PVC, 40P, Color: White(WH01)	4
	AR	AR	AR	AR	MR	USB 2.0 Cable 28AWG*1P+28AWG*2C+Al/Mylar +Drain+Braid, Color: White(WH01).	3
	1	1	1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 B Type.	2
	1	1	1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 A Type.	1
	-4	-3	-2	-1	U/M		

PIN ASSIGNMENT :

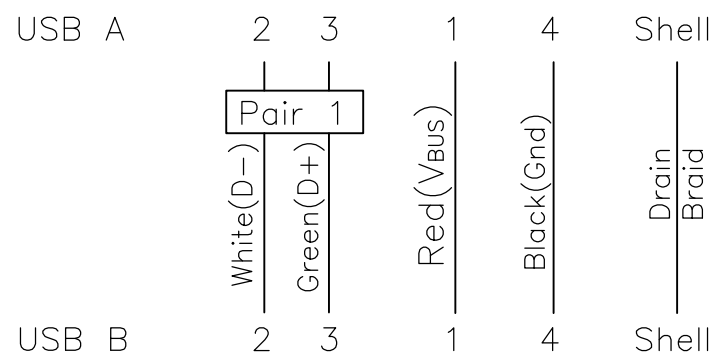

PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS ENVIRONMENTAL STANDARD TEC-138-702

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN BOVEY LIU 25FEB02	 TE Connectivity
0 PLC ± -	1 PLC ± -	CHK J.HUNT 25FEB02	
2 PLC ± -	3 PLC ± -	APVD J.HUNT 25FEB02	NAME
4 PLC ± -	ANGLES ± -	PRODUCT SPEC	USB A TYPE TO USB B TYPE CABLE ASSEMBLY
MATERIAL	FINISH	APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO
-	-	WEIGHT	A3 00779 C-1487586
CUSTOMER DRAWING		SCALE N.T.S	SHEET 1 OF 1 REV H